ALROX 500

FACADE · 50 MM

Facade system for vertical and inclined transparent structures and panoramic glazing.

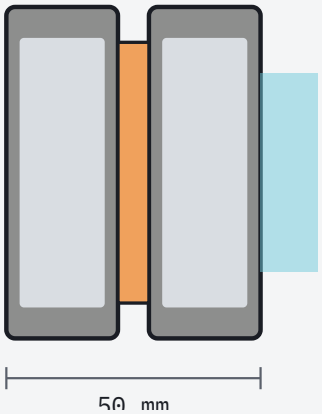

Profile depth	**50 mm**
Chambers	**3**
Thermal break	**Yes**
Frame U-value Uf (W/m²K)	**1.8**
Window U-value Uw, double (W/m²K)	**1.6**
Window U-value Uw, triple (W/m²K)	**1.3**
Glazing thickness	**6–50 mm**
Max. sash height	**1500 mm**
Typical use	**Facades, Entrance groups, Panoramic glazing**

Specification text. Windows and doors to be manufactured from ALROX 500 profile system by EURO.G Systems, Yerevan. Glazing: as specified. Hardware: tilt-and-turn where openable. All units factory-assembled, inspected and labelled for installation sequence.