ALROX 65

ALUMINIUM · 65 MM

Thermally broken aluminium for windows, doors, entrance groups and glazed structures.

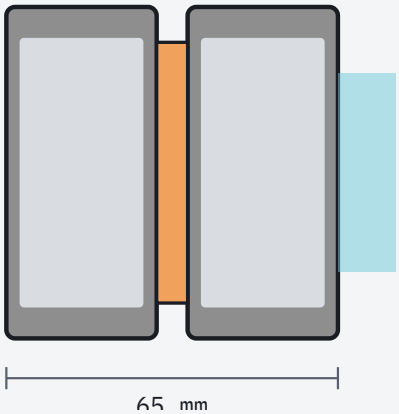

Profile depth	**65 mm**
Chambers	**3**
Thermal break	**Yes**
Frame U-value Uf (W/m²K)	**2.4**
Window U-value Uw, double (W/m²K)	**1.7**
Window U-value Uw, triple (W/m²K)	**1.4**
Glazing thickness	**6–40 mm**
Max. sash height	**1400 mm**
Typical use	**Windows, Doors, Glazing, Terraces**

Specification text. Windows and doors to be manufactured from ALROX 65 profile system by EURO.G Systems, Yerevan. Glazing: as specified. Hardware: tilt-and-turn where openable. All units factory-assembled, inspected and labelled for installation sequence.

Yerevan, Armenia · +374 44 77 00 30 · eurogsystems@gmail.com
Sample values for the concept. Replace with EURO.G data.