PVC 70

PVC · 70 MM

Five chambers and room for triple glazing. The balanced choice.

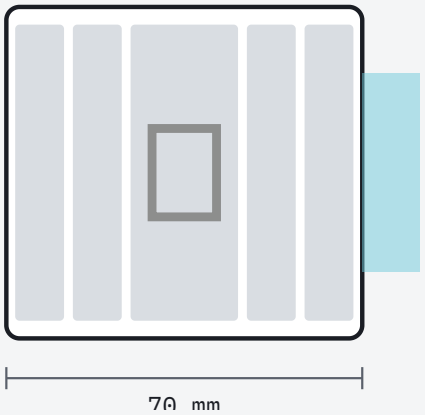

Profile depth	**70 mm**
Chambers	**5**
Thermal break	**Yes**
Frame U-value Uf (W/m²K)	**1.1**
Window U-value Uw, double (W/m²K)	**1.2**
Window U-value Uw, triple (W/m²K)	**1.0**
Glazing thickness	**24–40 mm**
Max. sash height	**1000 mm**
Typical use	**Windows, Balcony doors, Doors**

Specification text. Windows and doors to be manufactured from PVC 70 profile system by EURO.G Systems, Yerevan. Glazing: as specified. Hardware: tilt-and-turn where openable. All units factory-assembled, inspected and labelled for installation sequence.