
PVC 82

PVC · 82 MM

Seven chambers for cold regions and low-energy houses.

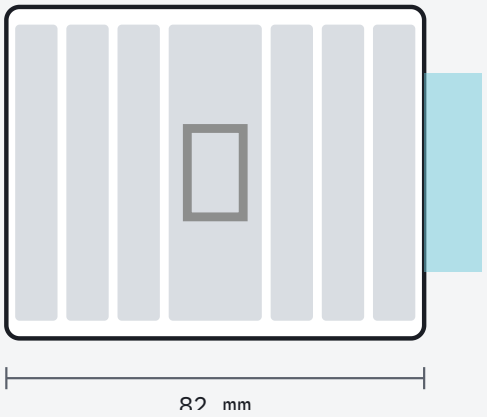

Profile depth	**82 mm**
Chambers	**7**
Thermal break	**Yes**
Frame U-value Uf (W/m²K)	**0.9**
Window U-value Uw, double (W/m²K)	**1.0**
Window U-value Uw, triple (W/m²K)	**0.8**
Glazing thickness	**24–52 mm**
Max. sash height	**1100 mm**
Typical use	**Windows, Balcony doors, Doors, Sliding systems**

Specification text. Windows and doors to be manufactured from PVC 82 profile system by EURO.G Systems, Yerevan. Glazing: as specified. Hardware: tilt-and-turn where openable. All units factory-assembled, inspected and labelled for installation sequence.

Yerevan, Armenia · +374 44 77 00 30 · eurogsystems@gmail.com
Sample values for the concept. Replace with EURO.G data.