
ALTIGO

2026

ALTIGO · VERTICAL MOBILITY

PRODUCT CATALOGUE

ESCALATOR

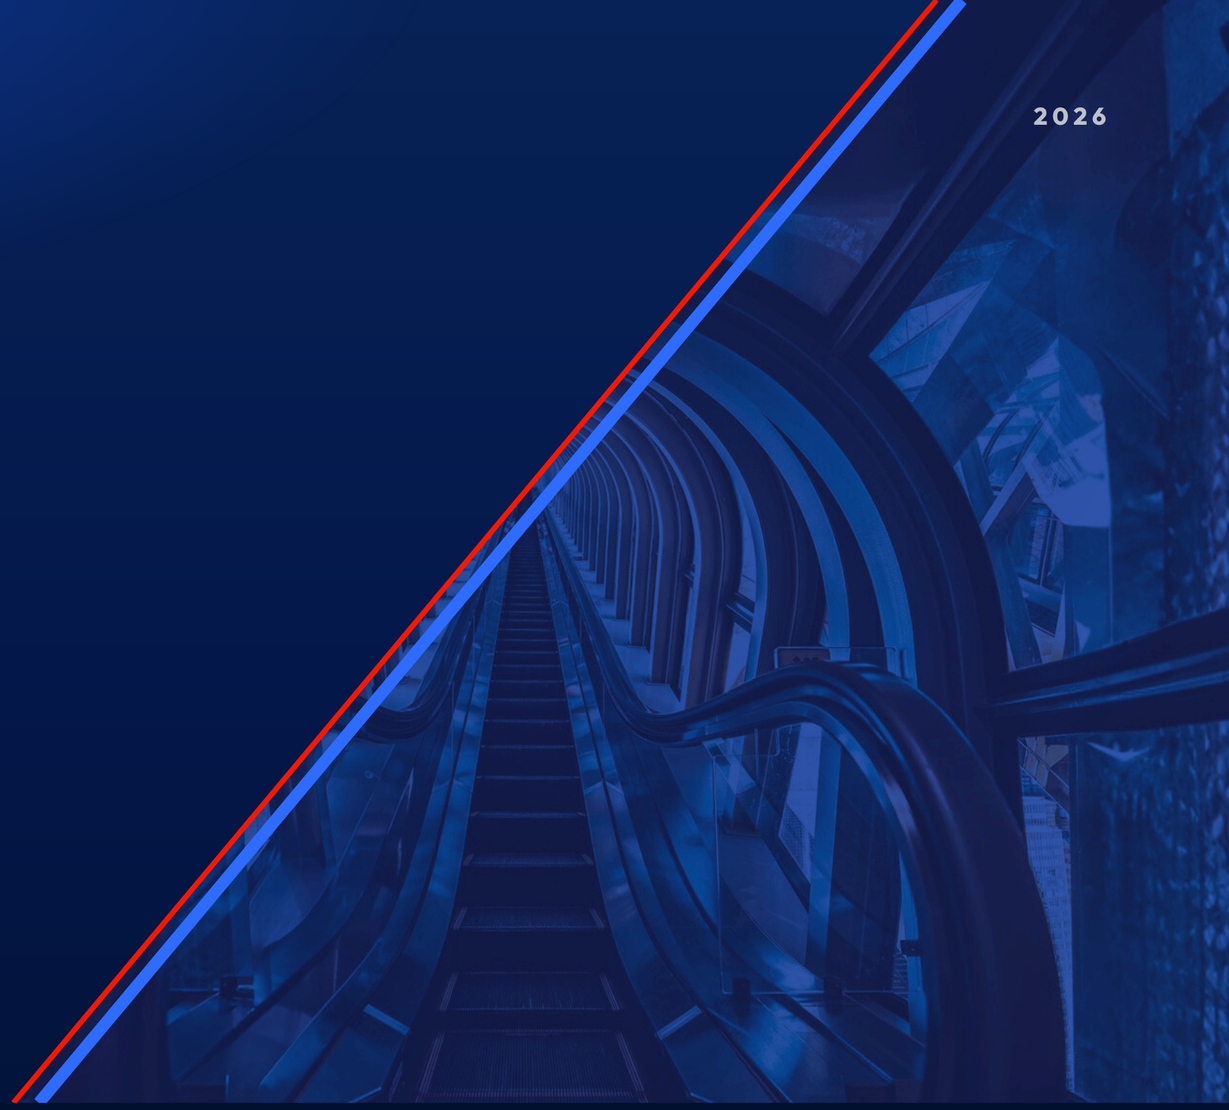

COMPANY

ALTIGO SDN. BHD.
REG. 562238-H

CONTACT

+604-283 7005
+604-283 6772

DIGITAL

WWW.AKKALLIANCE.COM
ALTIGOELEVATOR@GMAIL.COM

MANUFACTURER

HANGZHOU OPTIMAX TECH CO., LTD.

1ST NO. 1181, BIN'AN ROAD, HANGZHOU CITY, ZHEJIANG PROVINCE, P.R. CHINA


2ND NO. 2329, SCIENCE AND TECHNOLOGY AVENUE, QINGSHAN LAKE SCIENCE AND TECHNOLOGY ZONE, LIN'AN DISTRICT, HANGZHOU CITY, ZHEJIANG PROVINCE, P.R. CHINA

THE CATALOGUE

CONTENTS

01	**Company Introduction** Who we are	03
02	**Intelligent Control & Comfort** Technology	04
03	**Technical Advantages** Engineering	05
04	**Four Platforms, One Structure** The range	06
05	**Standard & Optional Parts** Components	07
06	**Comprehensive Safety Guarantee** Safety	08
07	**Safety & Detection Devices** Protection	09
08	**Planning & Civil** The chapter	10
09	**Logical Positioning, by Traffic** Planning guide	11
10	**Construction Parameters** Civil	12
11	**Contact Us** Altigo Sdn. Bhd.	13

2026

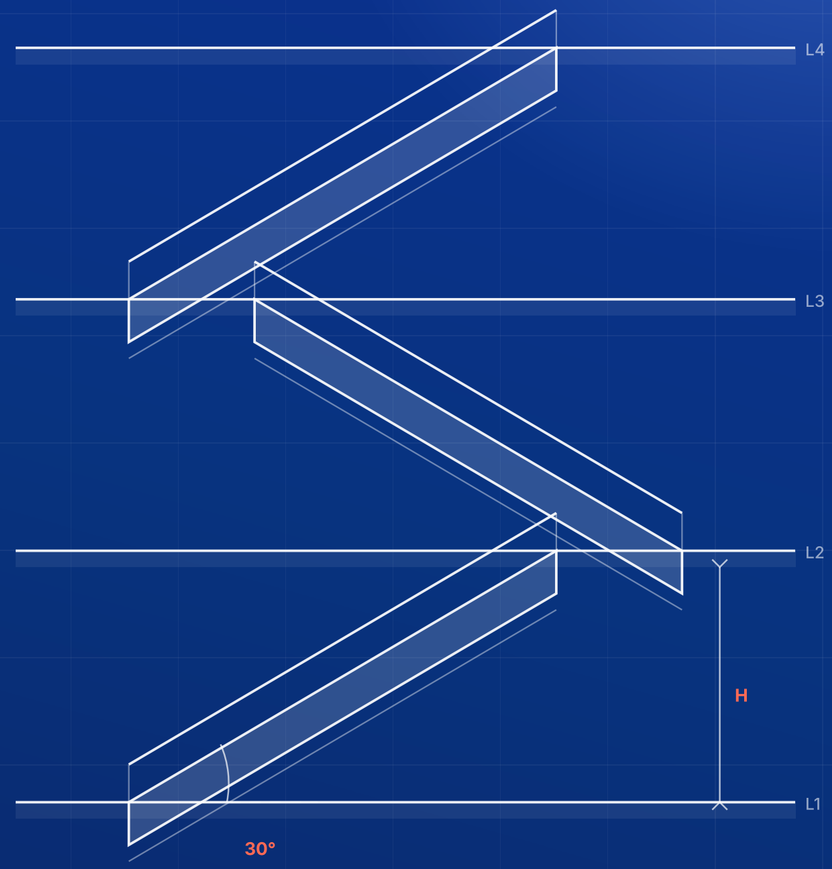

CRISSCROSS BANK · FOUR LEVELS

SECTION · INDICATIVE

THE COMPANY

COMPANY INTRODUCTION

Moving people, elevating places.

Imagine stepping into a building where every ride is smooth, every moment effortless and every floor easily reached. At **Altigo** we believe transport should never be merely a means to an end — it should be an experience that elevates the day and simplifies the journey.

Altigo is more than an elevator and escalator supplier. We are a partner in modern vertical mobility, combining advanced drive technology, exacting craftsmanship and a firm commitment to safety and sustainability, so our products meet the demands of fast-paced urban life.

Welcome to Altigo, where innovation meets reliability. Residential, commercial or industrial — we deliver solutions that transform spaces and elevate lives. Trust us to move you forward, every day, with ease and confidence.

Innovation


VVVF drives, IoT monitoring and energy regeneration built in.

Reliability

Engineered and tested for smooth, quiet, dependable everyday service.

Sustainability

Lower running energy and a longer service life across the range.

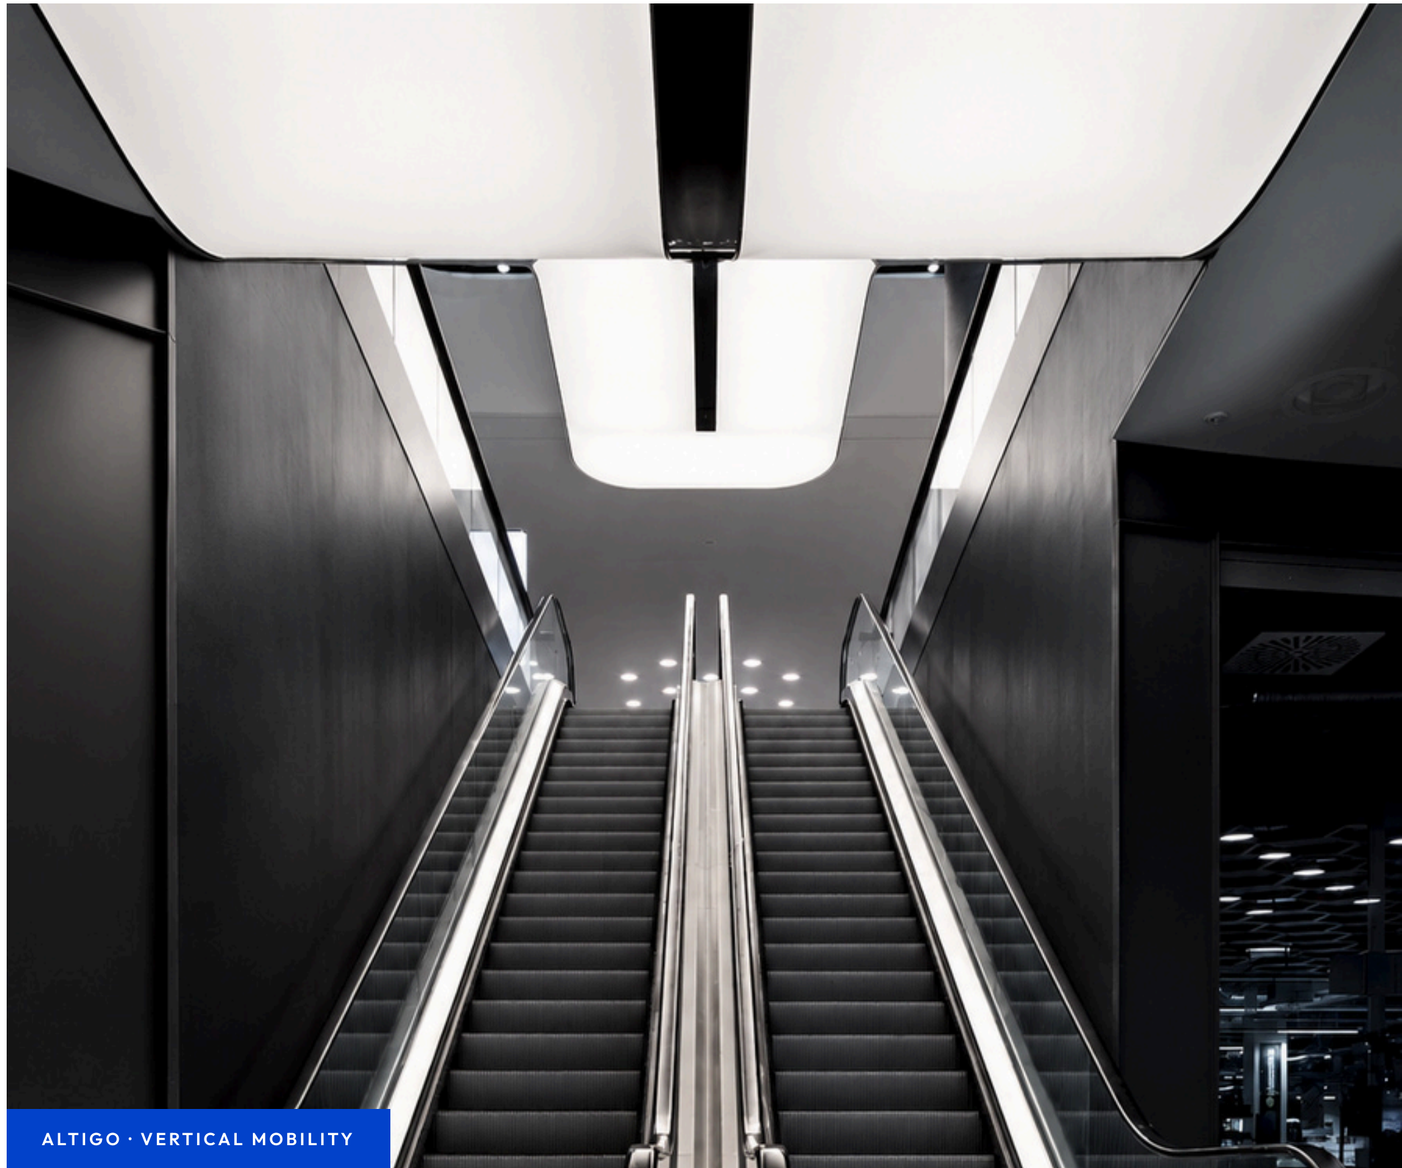

ALTIGO · VERTICAL MOBILITY

TECHNOLOGY · HUMAN-CENTRED

INTELLIGENT CONTROL & COMFORT

Built around human-centred design and refined through exhaustive testing, so every ride feels **safe, stable and effortless**.

01

High-performance control system

A modular, compact and integrated controller runs more steadily and pushes energy saving to its peak. CPU + DSP redundant architecture with built-in lightning protection guarantees reliability, and the system is fully EMC compliant.

CPU + DSP · EMC COMPLIANT

02

Energy saving & regeneration

By sensing passenger flow the escalator adjusts its speed curve to save energy across the whole travel. VLR technology monitors the drive's DC busbar voltage and feeds regenerated energy back to the grid.


VLR REGENERATION

03

Convenient remote monitoring

An RS485 / BAS interface links the escalator to your building management system for real-time fault reporting — convenient for maintenance and ready for intelligent building control.

RS485 / BAS

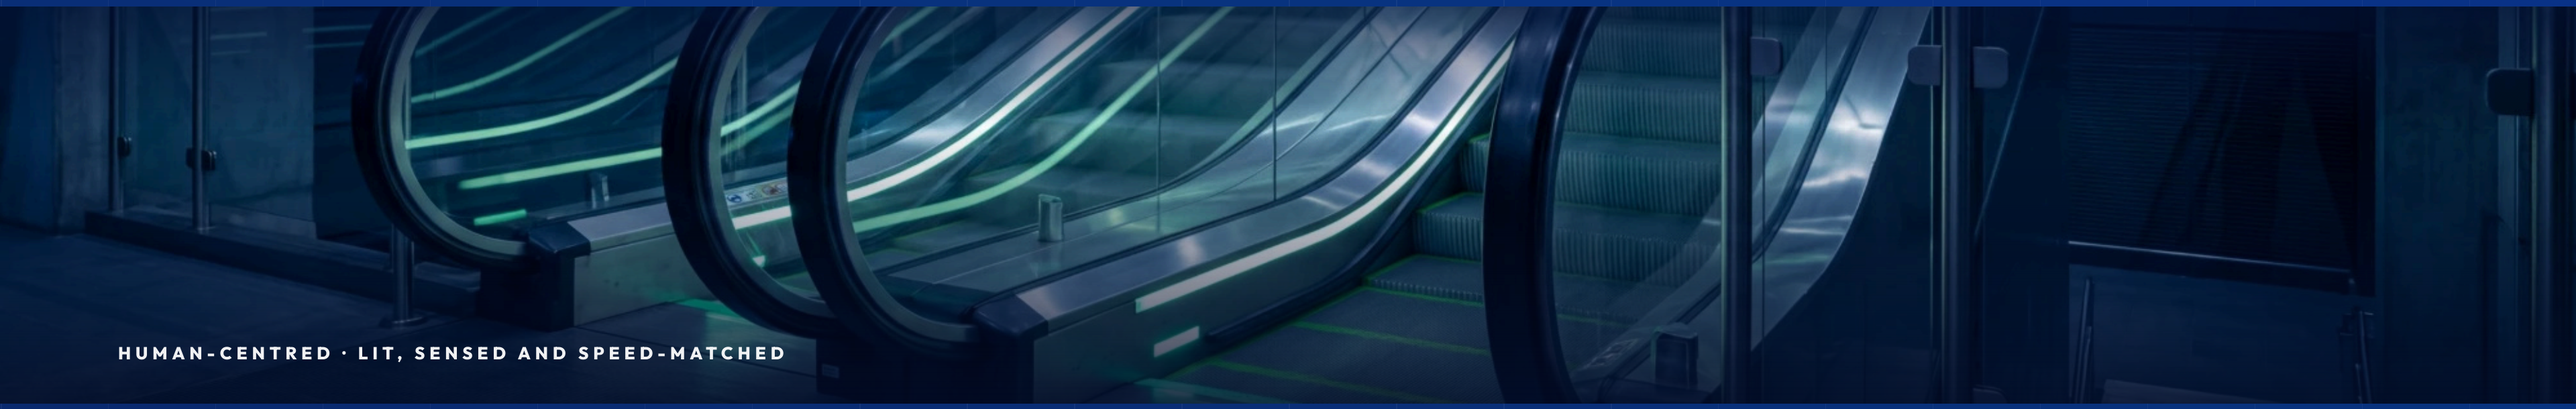

HUMAN-CENTRED · LIT, SENSED AND SPEED-MATCHED

STEP 01

Sense

Entry sensors read passenger flow at both landings, continuously.

STEP 02

Adapt

The VVVF drive reshapes the speed curve to match demand across the travel.

STEP 03

Recover

VLR returns braking energy to the building grid instead of burning it as heat.

STEP 04


Report

Status and fault codes reach the BMS over RS485 / BAS in real time.

ENGINEERING · DRIVE

TECHNICAL ADVANTAGES

Environmental protection sits at the centre of our engineering: a new **integrated converter and micro-computer control board** that saves space while raising drive efficiency.

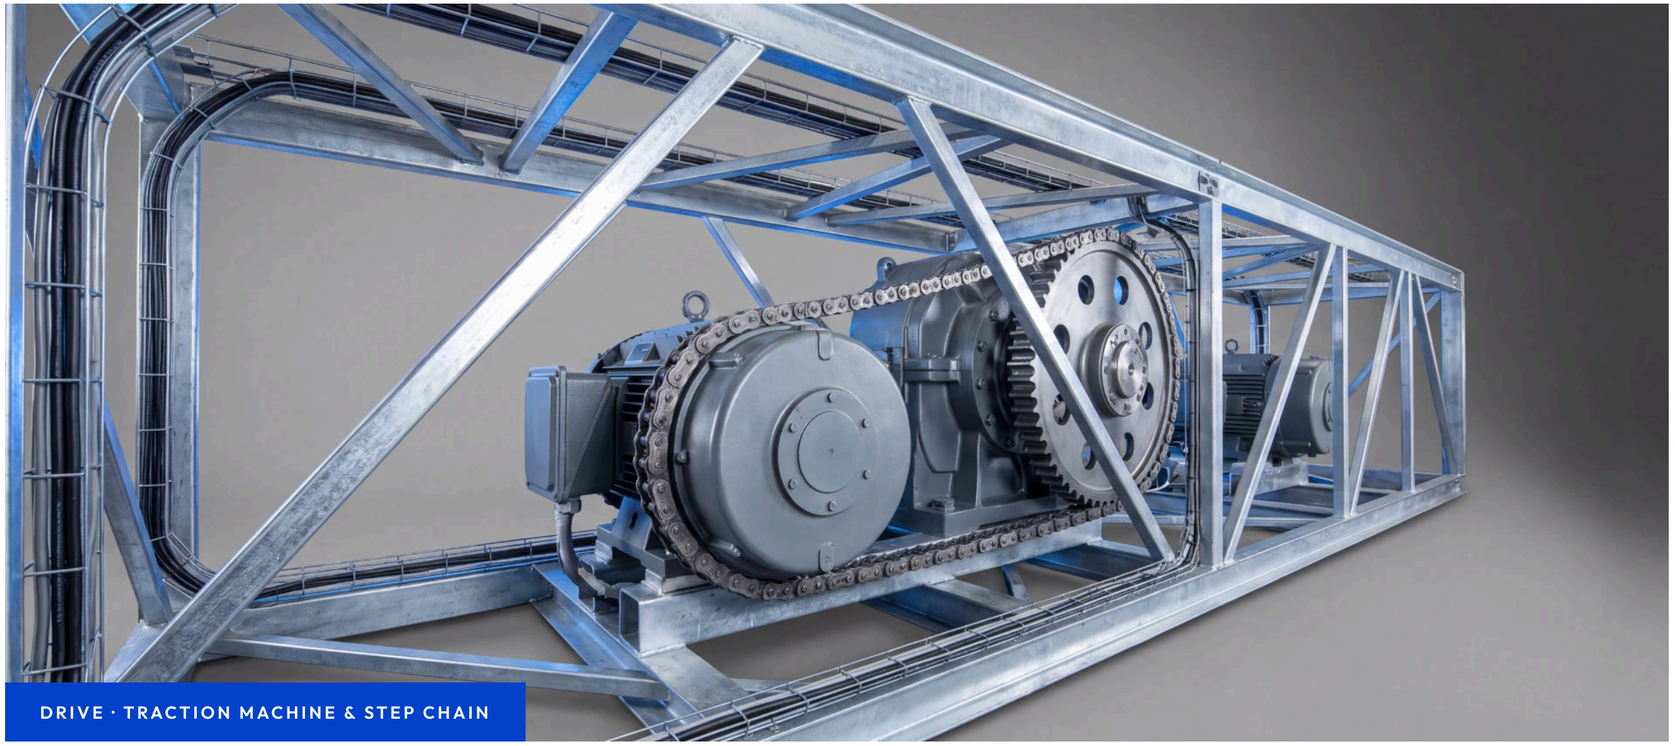

DRIVE · TRACTION MACHINE & STEP CHAIN

01 **Multiple safety protection**

Safety devices are fitted at every component of the escalator. Rigorous device testing and powerful fault diagnosis in the control system raise overall safety performance across the whole travel.

10 STANDARD DEVICES

02 **Comfortable ride feeling**

An escalator-specific VVVF drive with new-generation AC vector and voltage-regulator speed control delivers smooth acceleration and deceleration, for a more stable and comfortable ride.

VVVF · AC VECTOR

03 **High-performance traction machine**

The ET125 / ET160 ZC-toothed reducer is high-torque, compact, low-noise and steady. The CG26 worm-helical reducer combines worm and helical gearing for very high efficiency.

ET125 / ET160 · CG26

< 57 dB
Running noise, commercial platform

> 92 %
CG26 worm-helical reducer efficiency

0.5 m/s
Rated travel speed across the range

11–37 kW
Drive power band, by duty class

30° /35°
Inclination angle, project dependent

THE RANGE

FOUR PLATFORMS, ONE STRUCTURE.

Every Altigo unit shares one **integrated structure**. Choose the duty class by where it lives — a boutique mall, a metro concourse, an airport pier — and how hard it has to work.


DUTY CLASS 01

Commercial

Malls, hotels and offices. Smooth ZC-toothed drive, under 57 dB.

MAX RISE

6 m

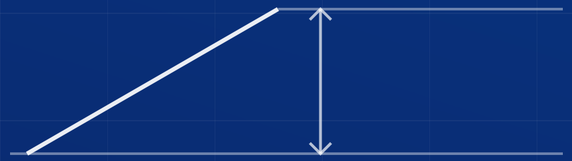

30° · 35°

Series	**HD-B**
Angle	**30° / 35°**
Speed	**0.5 M/S**


DUTY CLASS 02

Public Transport

Stations and transit hubs. Double-drive option for busier runs.

MAX RISE

12 m

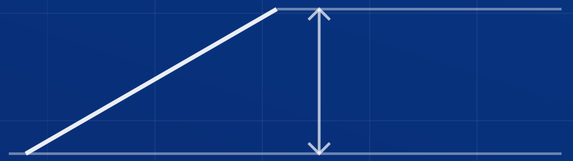

30°

Series	**HD-G**
Angle	**30°**
Drive	**SINGLE / DUAL**


DUTY CLASS 03

Heavy Duty

Airports and high-footfall transit. CG26 drive above 92% efficiency.

MAX RISE

22 m

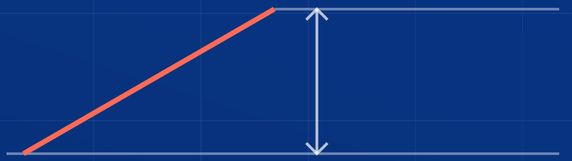

30°

Series	**MR · TRACTION 2:1**
Angle	**30°**
Power	**11–37 KW**

DUTY CLASS 04

Moving Walk

Level and gentle-incline conveyors for concourses and retail.

MAX RISE

7.5 m



10° · 12°

Series	**MR · TRACTION 2:1**
Angle	**10° / 12°**
Pallet	**800 / 1000 MM**

Energy regeneration

VLR feeds braking energy back to the grid; speed adapts to passenger flow.

Multiple safety

Devices at every component, with strong fault diagnosis built in.

Remote monitored

RS485 / BAS link for real-time fault and maintenance data.

CPU + DSP control


Redundant control, full EMC compliance, compact integrated cabinet.

INTEGRATED STRUCTURE

STANDARD & OPTIONAL PARTS

An escalator's function need not scale with its complexity. Our integrated structure keeps the equipment precise and efficient, and makes installation and commissioning simpler and faster.

SECTION · BALUSTRADE, STEP & TRUSS

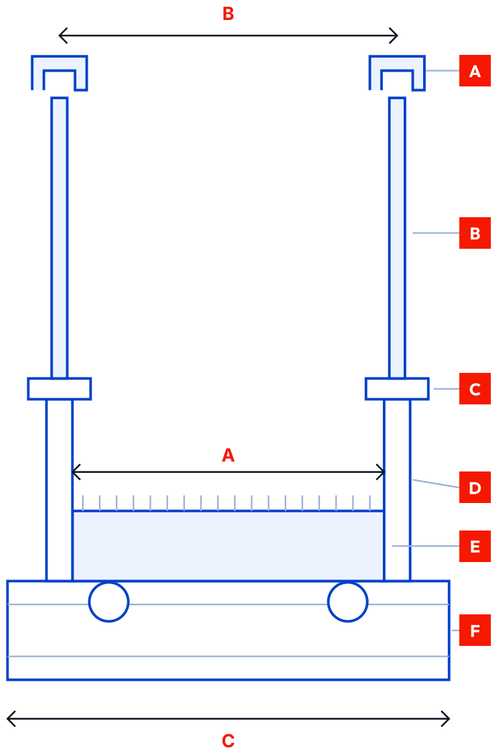

- A Handrail
- B Balustrade glass
- C Deck cover
- D Skirt panel
- E Step, cleated
- F Truss box section

PART	STANDARD CONFIGURATION	OPTIONAL CONFIGURATION
Balustrade	Transparent glass	**Inclined stainless steel**
Landing board	Stainless steel series	**Aluminium series**
Step	Stainless steel series	**Aluminium series**
Pallets	Stainless steel series	**Aluminium series**
Handrail colour	Black	**Brown** **Red** **Green** **Blue**
Traction machine	Worm gear drive	**Worm helical gear drive**


NOTE — step and pallet width, handrail and balustrade type are selected per project. Aluminium series and inclined stainless steel balustrade are available as options across the whole duty range.


YOUR TRAFFIC SAFETY

COMPREHENSIVE SAFETY GUARANTEE

From children to the elderly, a broad set of safety features helps every passenger get on and off safely.


Numbers 1–8 mark where each feature sits on the unit.

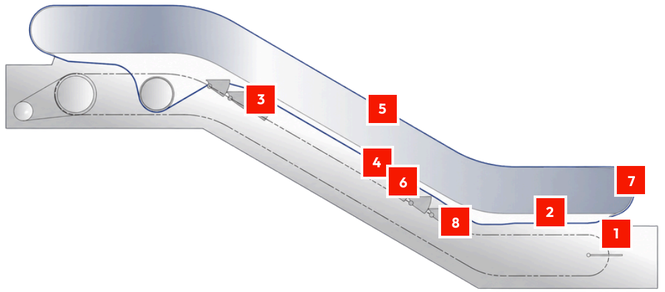

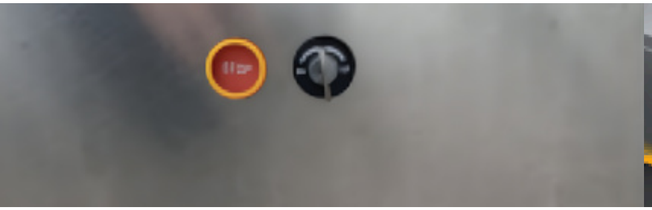


1 Emergency Stop Button

Stops the escalator immediately and prevents a more severe incident.

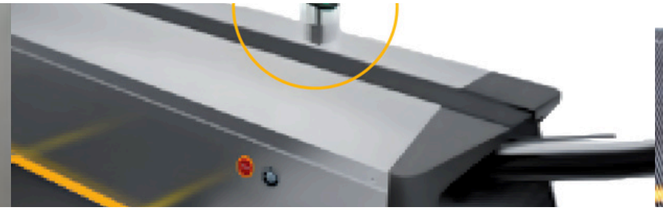


2 Direction Indicator Light

Running direction and restriction signs at the handrail entry guide passengers.

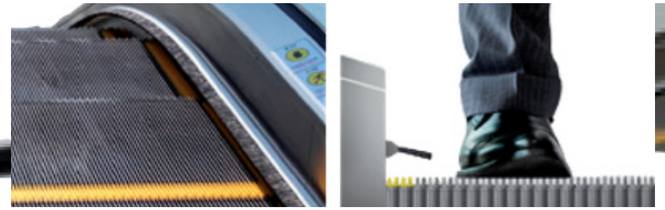

3 Skirt Panel Brush

Prevents clothing being caught between skirt panel and step edge.

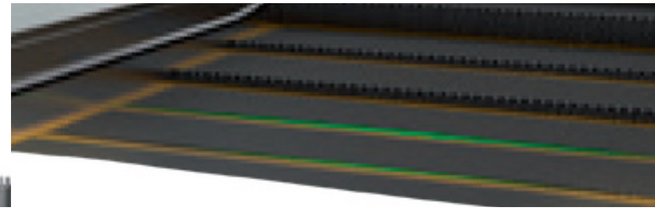


4 Step Boundary Lights

Green fluorescence at the step edges helps passengers read step level.



5 Handrail Lighting

Set into the handrail support: soft light adds beauty to a running escalator.

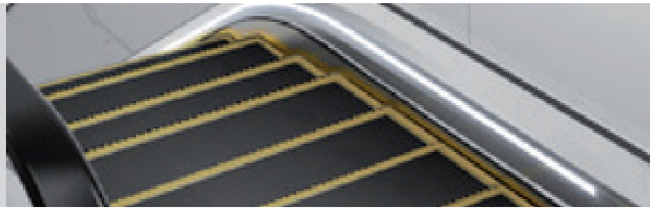


6 Skirt Panel Lights

Elegant lighting highlights the escalator and creates a safer, calmer ride.



7 Newel

The newel frame angle is 20°, reducing the risk of children or items being caught.

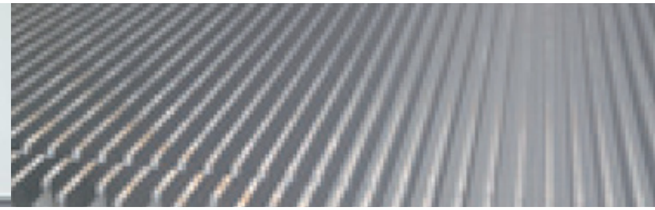

8 Anti-slip Step

Grooved steps improve anti-slip performance and visibility for greater safety.

PROTECTION · STANDARD & OPTIONAL

SAFETY & DETECTION DEVICES

Standard devices

10 FITTED

01 Skirt brush & guard
02 Comb plate guard
03 Handrail entry & exit guard
04 Emergency stop button
05 Speed / overspeed monitor
06 Step sag detector
07 Step chain break & elongation detector
08 Driving chain safety device
09 Missing step detector
10 Handrail anti-static device


Optional devices

8 AVAILABLE

01 Automatic lubrication
02 Water level detection
03 Truss & comb plate heating
04 Auxiliary brake — standard above 6 m rise
05 Running indicator
06 Stop-on-empty energy mode
07 Skirt deflector device
08 Anti-reverse protection

Every standard device is proven at the factory and again at commissioning. Trips and fault states are reported through the **RS485 / BAS link**, so building maintenance sees the cause, not just the stop.

WHERE THE STANDARD DEVICES SIT · ELEVATION

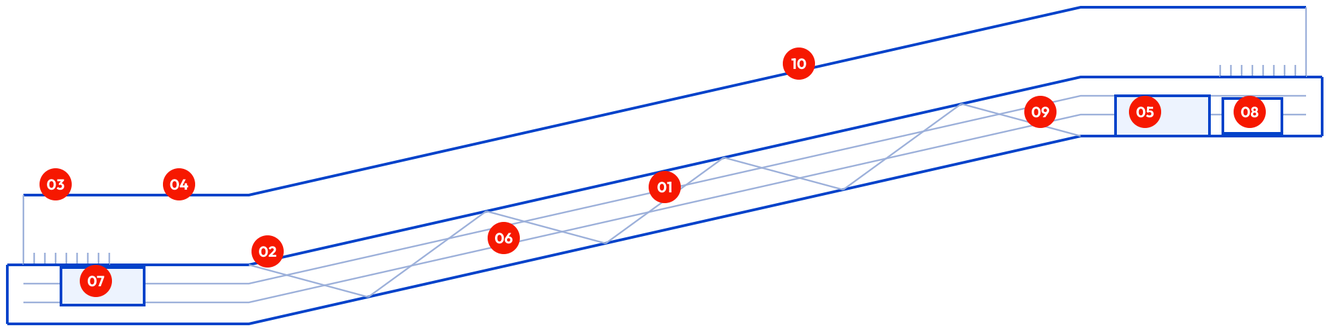

Standard devices · indicative positions



TRUSS · STEP ASSEMBLY

Part Two

PLANNING & CIVIL

Where the unit sits in the building, and the openings it needs.

1400
Exterior truss width, millimetres

1460
Minimum well width, millimetres


30°
Standard inclination across the range

10 **Logical positioning, by traffic**

11 **Construction parameters**

12 **Contact**

WELL OPENING · PLAN

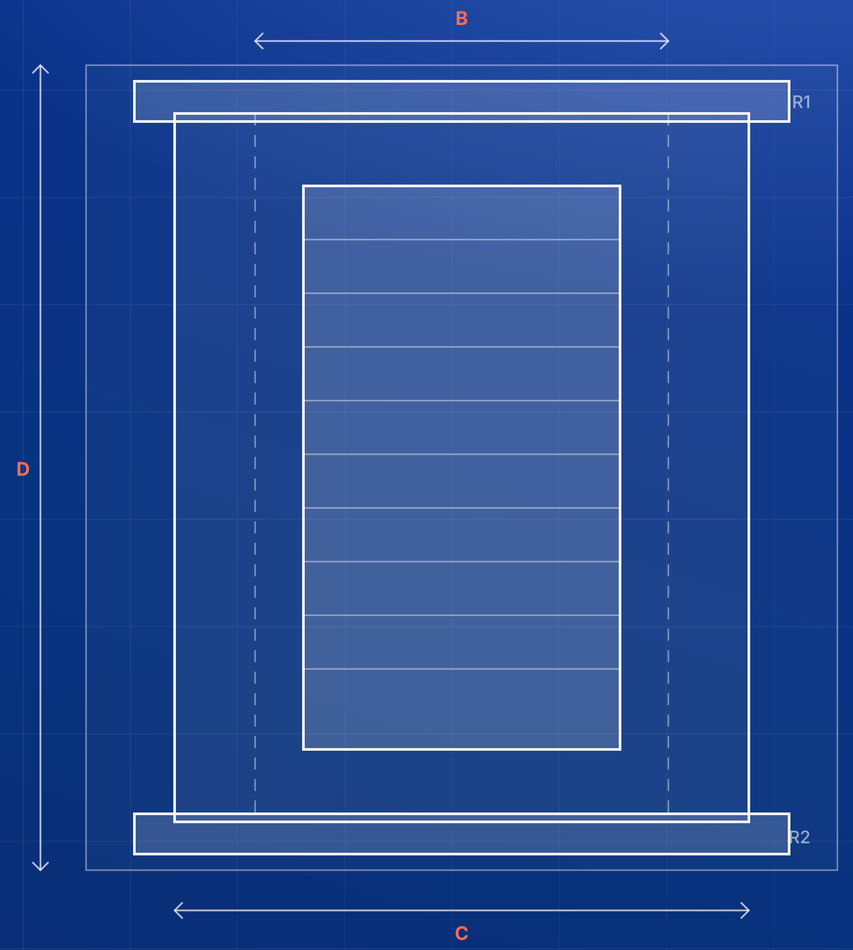

B HANDRAIL CENTRES · C TRUSS WIDTH · D CLEAR WELL LENGTH

PLANNING GUIDE

LOGICAL POSITIONING, BY TRAFFIC

Arrangement follows the building — traffic volume, flow direction and footprint. **Five layouts** cover most cases, from a single run linking two levels to crisscross banks that move crowds through several floors at once.

ONE-WAY

Single unit

Links two levels. Best where traffic runs mainly one way; reversible by time of day.





ONE-WAY

Continuous

Stacked runs, same direction, no detour. Links three sales levels; needs more space.






ONE-WAY

Interrupted

Offset runs force a short walk between levels, leading shoppers past displays.

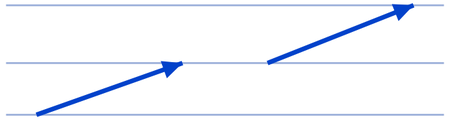



TWO-WAY

Parallel

Up and down side by side. For heavy two-way flow; economical with three or more units.






TWO-WAY

Crisscross

Compact X-banks for large stores and transit; minimises travel time between levels.

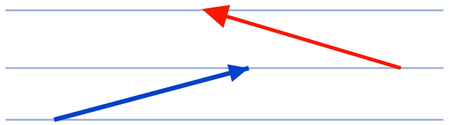





LAYOUT PLAN · CIVIL

CONSTRUCTION PARAMETERS


ESCALATOR ELEVATION & CIVIL ENVELOPE

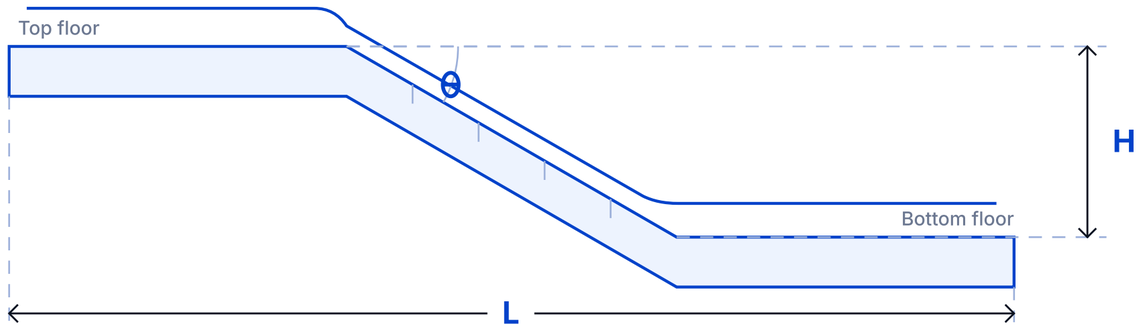

CROSS-SECTION · WIDTHS

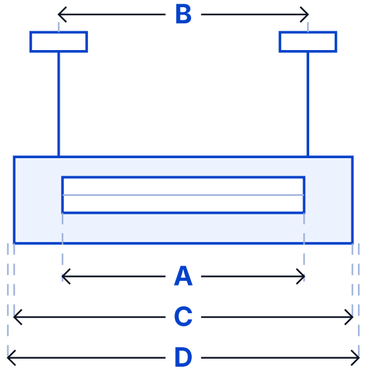

PLAN · LANDING & SUPPORTS

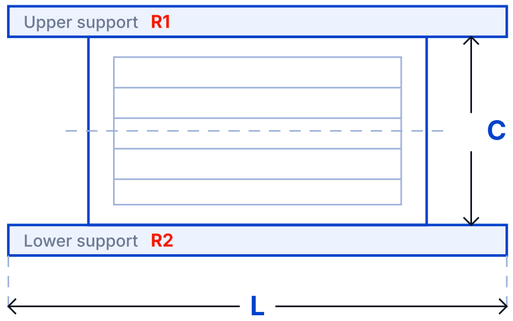

DIMENSION KEY

A	Step / pallet width	600 · 800 · 1000
B	Handrail centre distance	1038
C	Exterior truss width	1400
D	Minimum well width	1460
H	Rise, floor to floor	per project
L	Overall length / support span	per project
θ	Inclination angle	30° · 35°
P	Pit depth, lower landing	1100
R	Support reactions, upper & lower	R1 · R2

All dimensions in millimetres. 30° is standard across the range; 35° is available on the HD-B commercial platform. Moving walks run at 10° / 12°.

Figures are indicative. Final civil openings, support reactions and pit depths are issued per project with the approved shop drawings.

GET IN TOUCH

CONTACT US

COMPANY

ALTIGO SDN. BHD.

REG. 562238-H

WEBSITE

WWW.AKKALLIANCE.COM

EMAIL

ALTIGOELEVATOR@GMAIL.COM

PHONE

+604-283 7005 / +604-283 6772

ADDRESS

NO. 54-3-3, WISMA SRI MATA,
JALAN VAN PRAAGH, 11600 PENANG, MALAYSIA

MANUFACTURER

HANGZHOU OPTIMAX TECH CO., LTD.

1ST NO. 1181, BIN'AN ROAD, HANGZHOU CITY, ZHEJIANG PROVINCE, P.R. CHINA

2ND NO. 2329, SCIENCE AND TECHNOLOGY AVENUE, QINGSHAN LAKE SCIENCE AND TECHNOLOGY ZONE, LIN'AN DISTRICT, HANGZHOU CITY, ZHEJIANG PROVINCE, P.R. CHINA