


DECKING PRODUCT SUBMITTAL


078FD-FY50-20-G40

PRODUCT	GRADE	GAUGE	COATING
7/8" Form Deck	Grade 50	20 ga	G40

PRODUCT VIEW

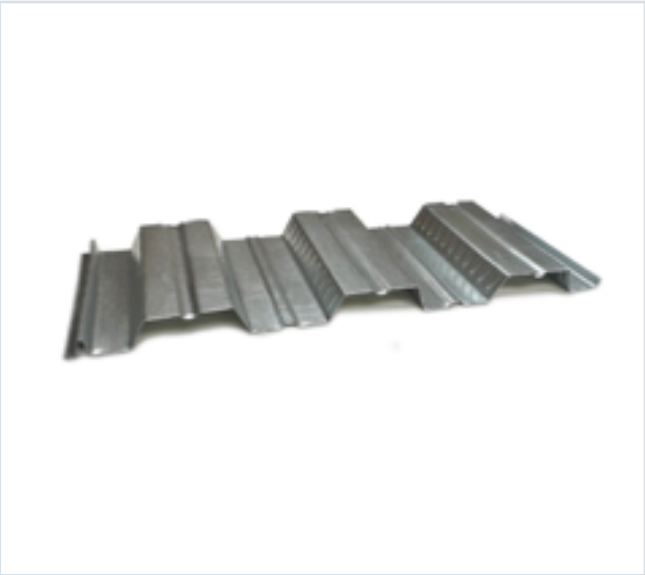

PROFILE DRAWING

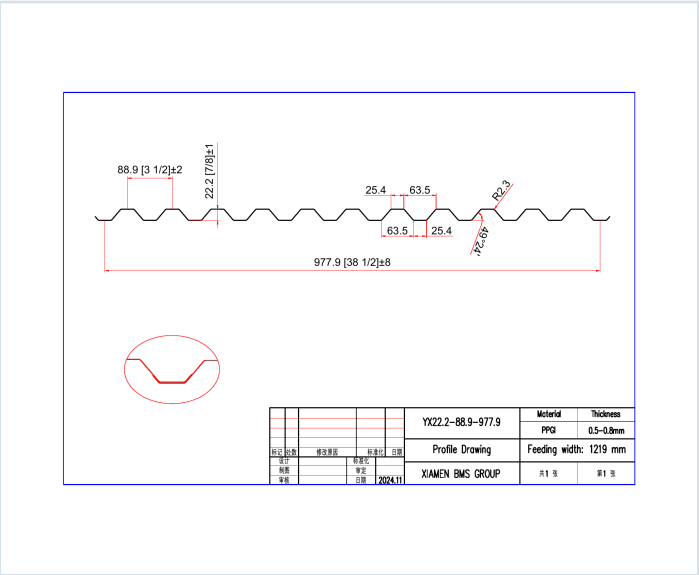

SECTION PROPERTIES · 20 GAUGE

Thickness (in.)	Weight (psf)	Fy (ksi)	S+ (in ³ /ft)	S- (in ³ /ft)	M+ (in-lb/ft)	M- (in-lb/ft)	I+ (in ⁴ /ft)	I- (in ⁴ /ft)
0.0358	1.8	60	0.152	0.152	5446	5443	0.077	0.077

SOURCE AND USE

1. Source: Refined Metal Steel Catalog 2025, published pages 69
2. ASD section values above are the exact published row for this grade and gauge.
3. Coating selection does not change the published structural performance values.
4. Verify project-specific loading, fastening, span, concrete, and code requirements with the design professional.

PUBLISHED PERFORMANCE DATA

078FD-FY50-20-G40 · 20 GAUGE


OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 69

7/8" FORM DECK

GRADE 50 STEEL

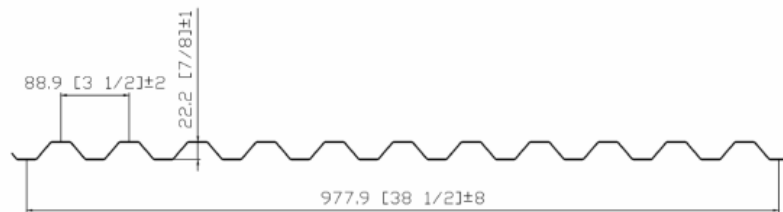

Section Properties

Gage	Design Thickness (inches)	Weight (psf)	F _y (ksi)	S _x + (inch ³) per foot	S _e - (inch ³) per foot	ASD (Ω = 1.67)		I _x + (inch ⁴) per ft.	I _y - (inch ⁴) per ft.
						M / Ω inch-lbs per ft	M / Ω inch-lbs per ft		
26	0.0179	0.9	60	0.061	0.064	2184	2314	0.035	0.035
24	0.0239	1.2	60	0.090	0.095	3218	3416	0.048	0.048
22	0.0295	1.5	60	0.118	0.124	4248	4449	0.061	0.061
20	0.0358	1.8	60	0.152	0.152	5446	5443	0.077	0.077

Note

All section properties and ASD flexural strengths are calculated in accordance with ANSI/SDI RD-2017, AISI S100-2012 and AISI S100-2016

Shear and Web Crippling

Gage	V _u /Ω (lbs/ft)	Web Crippling (R _n /Ω), lbs/ft One Flange Loading End Bearing			Web Crippling (R _n /Ω), lbs/ft One Flange Loading Interior Bearing		
		1-1/2"	2"	3"	1-1/2"	2"	3"
26	1691	458	507	590	559	611	700
24	3005	779	860	994	1006	1096	1246
22	3715	1146	1259	1450	1531	1660	1878
20	4508	1631	1787	2049	2240	2421	2726

Allowable Uniform Downward Loads, ASD (PSF)

Span	Gage	2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"
Single	26	364	233	162	119	91	72	58	48	40	34	30
	24	536	343	238	175	134	106	86	71	60	51	44
	22	708	453	315	231	177	140	113	94	79	67	58
	20	908	581	403	296	227	179	145	120	101	86	74
Double	26	386	247	171	126	96	76	62	51	43	37	31
	24	569	364	253	186	142	112	91	75	63	54	46
	22	742	475	330	242	185	146	119	98	82	70	61
	20	907	581	403	296	227	179	145	120	101	86	74
Triple	26	482	309	214	157	121	95	77	64	54	46	39
	24	712	455	316	232	178	141	114	94	79	67	58
	22	927	593	412	303	232	183	148	123	103	88	76
	20	1134	726	504	370	283	224	181	150	126	107	93