


DECKING PRODUCT SUBMITTAL


078SD-FY50-22-G60

PRODUCT	GRADE	GAUGE	COATING
7/8" S Deck	Grade 50	22 ga	G60

PRODUCT VIEW

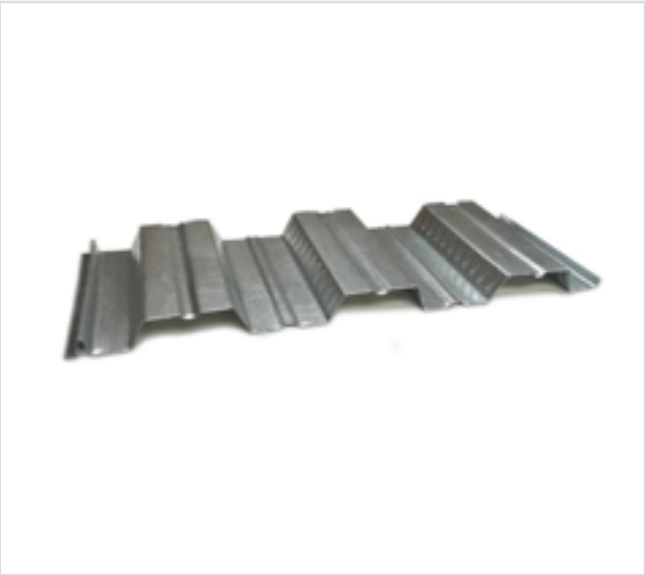

PROFILE DRAWING

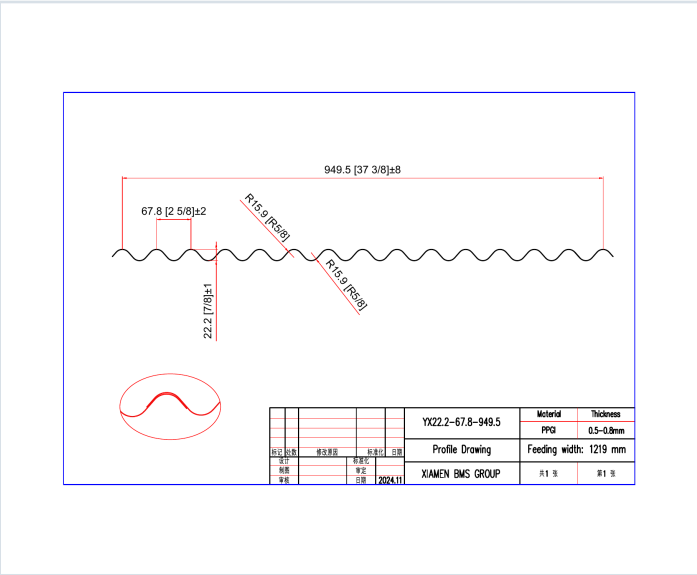

SECTION PROPERTIES · 22 GAUGE

Thickness (in.)	Weight (psf)	Fy (ksi)	S+ (in ³ /ft)	S- (in ³ /ft)	M+ (in-lb/ft)	M- (in-lb/ft)	I+ (in ⁴ /ft)	I- (in ⁴ /ft)
0.0295	1.4	60	0.084	0.084	3024	3024	0.024	0.024

SOURCE AND USE

1. Source: Refined Metal Steel Catalog 2025, published pages 67, 68
2. ASD section values above are the exact published row for this grade and gauge.
3. Coating selection does not change the published structural performance values.
4. Verify project-specific loading, fastening, span, concrete, and code requirements with the design professional.

PUBLISHED PERFORMANCE DATA


078SD-FY50-22-G60 · 22 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 67

GRADE 50 STEEL



Section Properties

Gage	Design Thickness (inches)	Weight (psf)	F _y (ksi)	S _x (in ³) per foot	S _y (in ³) per foot	M _x / I _x (in ⁴) per foot	M _y / I _y (in ⁴) per foot	L _c (inches) per ft.	L _c (inches) per ft.
28	0.0149	0.7	60	0.034	0.036	1239	1304	0.012	0.012
26	0.0179	0.8	60	0.041	0.042	1389	1485	0.015	0.015
24	0.0239	1.2	60	0.060	0.068	2348	2433	0.021	0.021
22	0.0295	1.4	60	0.084	0.094	3024	3024	0.024	0.024

Note: All section properties and ASD flexural strengths are calculated in accordance with AISI/S100-2017, AISI S100-2012 and AISI S100-2016.

Shear and Web Crippling

Gage	Web Crippling (R ₁), kN/ft One Flange Loading End Bearing	Web Crippling (R ₂), kN/ft One Flange Loading Interior Bearing	Web Crippling (R ₃), kN/ft One Flange Loading Interior Bearing
28	298	670	744
26	286	594	654
24	355	870	1032
22	4384	2291	259

Note: All section properties and ASD flexural strengths are calculated in accordance with AISI/S100-2017, AISI S100-2012 and AISI S100-2016.

Table 1 Allowable wind pressures for panels over spaced supports

Assembly No.	PANEL	SUPPORT ¹	FASTENING PATTERN ²	SPAC (inches)	ALLOWABLE NEGATIVE PRESSURE (psf)	ALLOWABLE POSITIVE PRESSURE (psf)
1	HC-18 (24-gauge steel, 18" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long pan-head screws with 1/4" diameter washer at panel fastening leg at all supports.	60	47	36
2	HC-18 (22-gauge steel, 18" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long pan-head screws with 1/4" diameter washer at panel fastening leg at all supports.	60	62	36

STEEL CATALOG PAGE 68

Assembly No.	PANEL	SUPPORT ¹	FASTENING PATTERN ²	SPAC (inches)	ALLOWABLE NEGATIVE PRESSURE (psf)	ALLOWABLE POSITIVE PRESSURE (psf)
6	HS-12 (24-gauge steel, 12" width) or HS-8 (24-gauge steel, 8" width)	Steel Spaced Supports	Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports.	60	44	20
7	HS-12 (22-gauge steel, 12" width) or HS-8 (22-gauge steel, 8" width)	Steel Spaced Supports	Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports.	60	72	20

10	HL-16 (24-gauge steel, 16" width)	Steel Spaced Supports	Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports.	60	65	90
11	HL-16 (22-gauge steel, 16" width)	Steel Spaced Supports	Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports.	60	62	125

14	FW-12 with grooves (24-gauge steel, 12" width) or FW-1025 with grooves (24-gauge steel, 10.25" width)	Steel Spaced Supports	Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports. Sidelap fasteners are 1/4" x 1/4" long HWH screw with EPDM washer @ 24" o.c. along panel length.	60	45	50
15	FW-12 with grooves and seam lock feature (24-gauge steel, 12" width) or FW-1025 with grooves and seam lock feature (24-gauge steel, 10.25" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long HWH screws with 1/4" diameter washer at panel fastening leg at all supports.	60	31	50
16	FW-12 with grooves (22-gauge steel, 12" width) or FW-1025 with grooves (22-gauge steel, 10.25" width)	Steel Spaced Supports	Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports. Sidelap fasteners are 1/4" x 1/4" long screw @ 24" o.c. along panel length.	60	70	70