


DECKING PRODUCT SUBMITTAL


078SD-FY50-26-G40

PRODUCT	GRADE	GAUGE	COATING
7/8" S Deck	Grade 50	26 ga	G40

PRODUCT VIEW

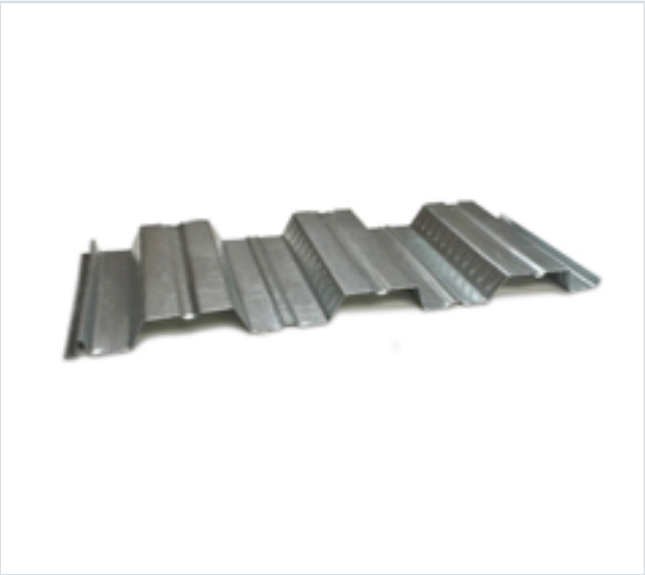

PROFILE DRAWING

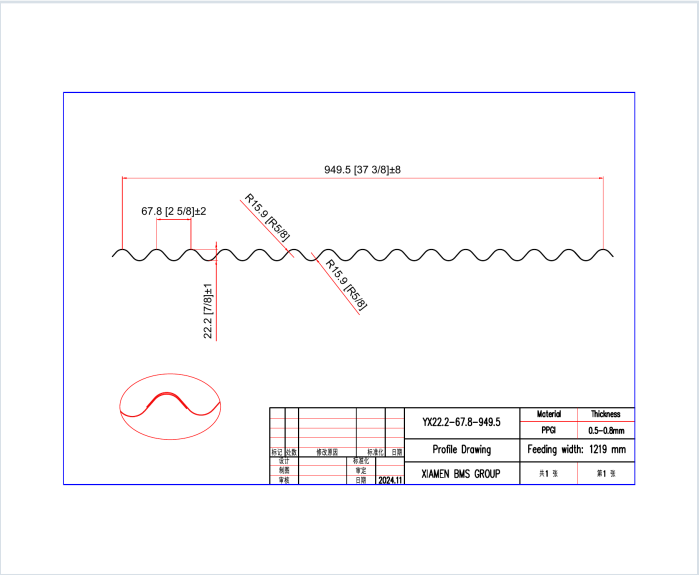

SECTION PROPERTIES · 26 GAUGE

Thickness (in.)	Weight (psf)	Fy (ksi)	S+ (in ³ /ft)	S- (in ³ /ft)	M+ (in-lb/ft)	M- (in-lb/ft)	I+ (in ⁴ /ft)	I- (in ⁴ /ft)
0.0179	0.9	60	0.045	0.047	1599	1683	0.015	0.015

SOURCE AND USE

1. Source: Refined Metal Steel Catalog 2025, published pages 67, 68
2. ASD section values above are the exact published row for this grade and gauge.
3. Coating selection does not change the published structural performance values.
4. Verify project-specific loading, fastening, span, concrete, and code requirements with the design professional.

PUBLISHED PERFORMANCE DATA


078SD-FY50-26-G40 · 26 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 67

GRADE 50 STEEL



Section Properties

Gage	Design Thickness (inches)	Weight (psf)	F _y (ksi)	S _x (in ³) per foot	S _y (in ³) per foot	M _x / I _x (in ⁴) per foot	M _y / I _y (in ⁴) per foot	I _x (in ⁴) per ft.	I _y (in ⁴) per ft.
26	0.0149	0.7	60	0.034	0.036	1239	1304	0.012	0.012
24	0.0179	0.8	60	0.041	0.042	1399	1483	0.015	0.015
22	0.0209	1.0	60	0.048	0.050	1599	1683	0.018	0.018

Note: All section properties and ASD flexural strengths are calculated in accordance with AISI/S100-2017, AISI S100-2017 and AISI S100-2016.

Shear and Web Crippling

Gage	S _x (in ³)	Web Crippling (R13.1) - One Flange Loading			Web Crippling (R13.1) - One Flange Loading		
		1-1/2"	2"	3"	1-1/2"	2"	3"
26	298	670	744	869	721	799	909
24	355	810	904	1059	869	969	1119
22	439	999	1109	1299	1059	1169	1319

Note: All section properties and ASD flexural strengths are calculated in accordance with AISI/S100-2017, AISI S100-2017 and AISI S100-2016.

Table 1 Allowable wind pressures for panels over spaced supports

Assembly No.	PANEL	SUPPORT	FASTENING PATTERN	SPAC (in)	ALLOWABLE NEGATIVE PRESSURE (psf)	ALLOWABLE POSITIVE PRESSURE (psf)
1	HS-12 (24-gauge steel, 12" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long pan-head screws at panel fastening leg at all supports	60	47	36
2	HS-12 (22-gauge steel, 12" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long pan-head screws at panel fastening leg at all supports	60	62	36

STEEL CATALOG PAGE 68

Assembly No.	PANEL	SUPPORT	FASTENING PATTERN	SPAC (in)	ALLOWABLE NEGATIVE PRESSURE (psf)	ALLOWABLE POSITIVE PRESSURE (psf)
6	HS-12 (24-gauge steel, 12" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long pan-head screws at panel fastening leg at all supports	60	44	20
7	HS-12 (22-gauge steel, 12" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long pan-head screws at panel fastening leg at all supports	60	72	20

10	HS-12 (24-gauge steel, 12" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long pan-head screws at panel fastening leg at all supports	60	55	90
11	HS-12 (22-gauge steel, 12" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long pan-head screws at panel fastening leg at all supports	60	62	125

14	HS-12 (24-gauge steel, 12" width) or HS-12 (22-gauge steel, 12" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long pan-head screws at panel fastening leg at all supports	60	45	80
15	HS-12 (24-gauge steel, 12" width) or HS-12 (22-gauge steel, 12" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long pan-head screws at panel fastening leg at all supports	60	31	80
16	HS-12 (24-gauge steel, 12" width) or HS-12 (22-gauge steel, 12" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long pan-head screws at panel fastening leg at all supports	60	70	70