


DECKING PRODUCT SUBMITTAL


078SD-FY50-28-G60

PRODUCT	GRADE	GAUGE	COATING
7/8" S Deck	Grade 50	28 ga	G60

PRODUCT VIEW

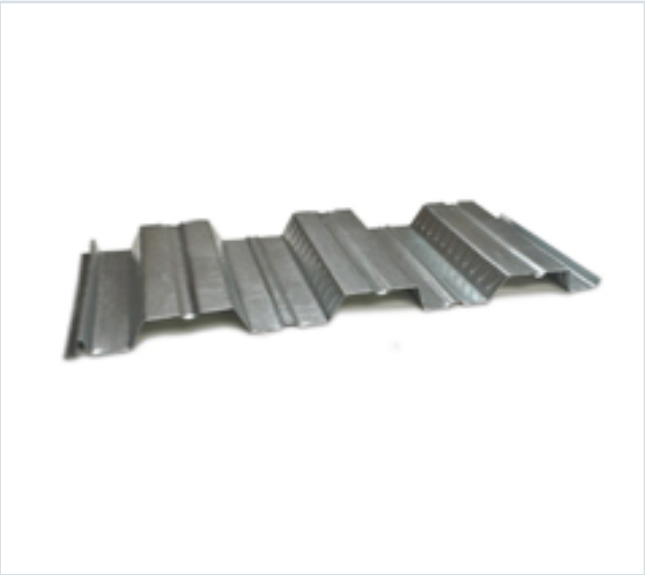

PROFILE DRAWING

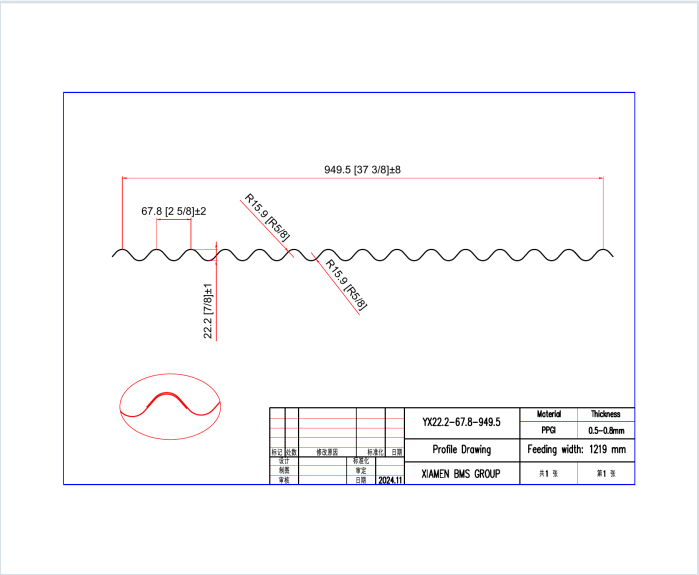

SECTION PROPERTIES · 28 GAUGE

Thickness (in.)	Weight (psf)	Fy (ksi)	S+ (in ³ /ft)	S- (in ³ /ft)	M+ (in-lb/ft)	M- (in-lb/ft)	I+ (in ⁴ /ft)	I- (in ⁴ /ft)
0.0149	0.7	60	0.034	0.036	1239	1304	0.012	0.012

SOURCE AND USE

1. Source: Refined Metal Steel Catalog 2025, published pages 67, 68
2. ASD section values above are the exact published row for this grade and gauge.
3. Coating selection does not change the published structural performance values.
4. Verify project-specific loading, fastening, span, concrete, and code requirements with the design professional.

PUBLISHED PERFORMANCE DATA


078SD-FY50-28-G60 · 28 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 67

GRADE 50 STEEL



Section Properties

Gage	Design Thickness (inches)	Weight (psf)	F _y (ksi)	S _x (in ³) per foot	S _y (in ³) per foot	M _x / I _x (in ⁴ /ft ⁴)	M _y / I _y (in ⁴ /ft ⁴)	L _c (inches) per ft.	L _c (inches) per ft.
28	0.078	67	60	0.034	0.036	1239	1304	0.02	0.02
26	0.079	68	60	0.043	0.047	1399	1485	0.02	0.02
24	0.0239	12	60	0.060	0.068	2348	2433	0.021	0.021
22	0.0295	14	60	0.084	0.094	3024	3024	0.024	0.024

Note: All section properties and ASD flexural strengths are calculated in accordance with AISI/S100-2017, AISI S100-2017 and AISI S100-2016.

Shear and Web Crippling

Gage	S _x (in ³)	Web Crippling (R ₁), kN/ft One Flange Loading End Bearing			Web Crippling (R ₂), kN/ft One Flange Loading Interior Bearing		
		1-1/2"	2"	3"	1-1/2"	2"	3"
28	298	670	744	869	721	799	909
26	286	594	654	769	667	747	854
24	355	1070	1232	1400	1000	1157	1324
22	4384	2291	259	2900	2890	3195	3546

Note: All section properties and ASD flexural strengths are calculated in accordance with AISI/S100-2017, AISI S100-2017 and AISI S100-2016.

Table 1 Allowable wind pressures for panels over spaced supports

Assembly No.	PANEL	SUPPORT ¹	FASTENING PATTERN ²	SPAC (inches)	ALLOWABLE NEGATIVE PRESSURE (psf)	ALLOWABLE POSITIVE PRESSURE (psf)
1	HC-18 (24-gauge steel, 18" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long pan-head screws with 1/4" diameter washer at panel fastening leg at all supports.	60	47	36
2	HC-18 (22-gauge steel, 18" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long pan-head screws with 1/4" diameter washer at panel fastening leg at all supports.	60	62	36

STEEL CATALOG PAGE 68

Assembly No.	PANEL	SUPPORT ¹	FASTENING PATTERN ²	SPAC (inches)	ALLOWABLE NEGATIVE PRESSURE (psf)	ALLOWABLE POSITIVE PRESSURE (psf)
6	HS-12 (24-gauge steel, 12" width) or HS-8 (24-gauge steel, 8" width)	Steel Spaced Supports	Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports.	60	44	20
7	HS-12 (22-gauge steel, 12" width) or HS-8 (22-gauge steel, 8" width)	Steel Spaced Supports	Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports.	60	72	20

10	HL-16 (24-gauge steel, 16" width)	Steel Spaced Supports	Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports.	60	65	90
11	HL-16 (22-gauge steel, 16" width)	Steel Spaced Supports	Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports.	60	62	125

14	FW-12 with grooves (24-gauge steel, 12" width) or FW-1025 with grooves (24-gauge steel, 10.25" width)	Steel Spaced Supports	Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports. Slidap fasteners are 1/4" x 1/4" long HWH screw with EPDM washer @ 24" o.c. along panel length.	60	45	50
15	FW-12 with grooves and beam lock feature (24-gauge steel, 12" width) or FW-1025 with grooves and beam lock feature (24-gauge steel, 10.25" width)	Steel Spaced Supports	Two (2) #12-14 x 1 1/2" long HWH screws with 1/4" diameter washer at panel fastening leg at all supports.	60	31	50
16	FW-12 with grooves (22-gauge steel, 12" width) or FW-1025 with grooves (22-gauge steel, 10.25" width)	Steel Spaced Supports	Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports. Slidap fasteners are 1/4" x 1/4" long screw @ 24" o.c. along panel length.	60	70	70