


DECKING PRODUCT SUBMITTAL


078SD-FY50-28-G90

|             |          |       |         |
|-------------|----------|-------|---------|
| PRODUCT     | GRADE    | GAUGE | COATING |
| 7/8" S Deck | Grade 50 | 28 ga | G90     |

PRODUCT VIEW

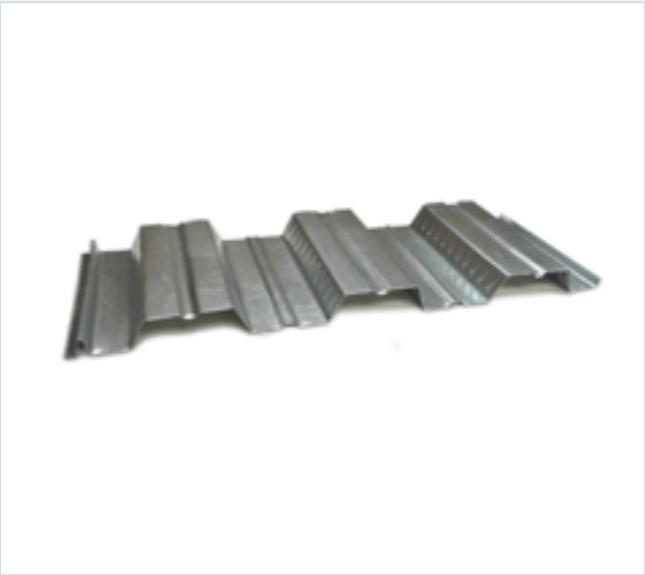

PROFILE DRAWING

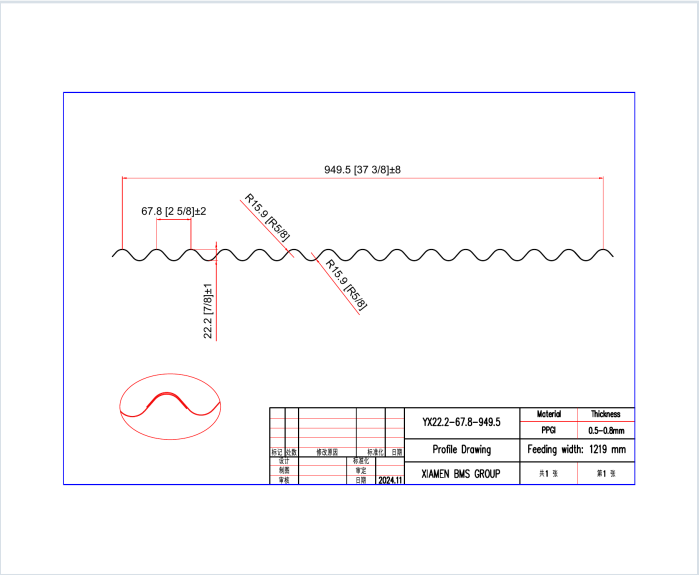

SECTION PROPERTIES · 28 GAUGE

| Thickness<br>(in.) | Weight<br>(psf) | Fy<br>(ksi) | S+<br>(in <sup>3</sup> /ft) | S-<br>(in <sup>3</sup> /ft) | M+<br>(in-lb/ft) | M-<br>(in-lb/ft) | I+<br>(in <sup>4</sup> /ft) | I-<br>(in <sup>4</sup> /ft) |
|--------------------|-----------------|-------------|-----------------------------|-----------------------------|------------------|------------------|-----------------------------|-----------------------------|
| 0.0149             | 0.7             | 60          | 0.034                       | 0.036                       | 1239             | 1304             | 0.012                       | 0.012                       |

SOURCE AND USE

1. Source: Refined Metal Steel Catalog 2025, published pages 67, 68
2. ASD section values above are the exact published row for this grade and gauge.
3. Coating selection does not change the published structural performance values.
4. Verify project-specific loading, fastening, span, concrete, and code requirements with the design professional.

# PUBLISHED PERFORMANCE DATA


078SD-FY50-28-G90 · 28 GAUGE

## OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

### STEEL CATALOG PAGE 67

#### GRADE 50 STEEL



#### Section Properties

| Gage | Design Thickness (inches) | Weight (psf) | F <sub>y</sub> (ksi) | S <sub>x</sub> (in <sup>3</sup> ) per foot | S <sub>y</sub> (in <sup>3</sup> ) per foot | M <sub>x</sub> / I <sub>x</sub> (in <sup>4</sup> ) per foot | M <sub>y</sub> / I <sub>y</sub> (in <sup>4</sup> ) per foot | L <sub>r</sub> (inches) per ft. | L <sub>y</sub> (inches) per ft. |
|------|---------------------------|--------------|----------------------|--------------------------------------------|--------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------|---------------------------------|---------------------------------|
| 28   | 0.078                     | 67           | 60                   | 0.034                                      | 0.036                                      | 1239                                                        | 1304                                                        | 0.012                           | 0.012                           |
| 26   | 0.079                     | 68           | 60                   | 0.043                                      | 0.047                                      | 1399                                                        | 1485                                                        | 0.015                           | 0.015                           |
| 24   | 0.083                     | 72           | 60                   | 0.060                                      | 0.066                                      | 2348                                                        | 2433                                                        | 0.021                           | 0.021                           |
| 22   | 0.085                     | 74           | 60                   | 0.084                                      | 0.091                                      | 3024                                                        | 3024                                                        | 0.024                           | 0.024                           |

Note: All section properties and ASD flexural strengths are calculated in accordance with AISI/S100-2017, AISI S100-2017 and AISI S100-2016.

#### Shear and Web Crippling

| Gage | S <sub>x</sub> (in <sup>3</sup> ) | Web Crippling (R <sub>1</sub> ), kN One Flange Loading End Bearing |      |      | Web Crippling (R <sub>2</sub> ), kN One Flange Loading Interior Bearing |      |      |
|------|-----------------------------------|--------------------------------------------------------------------|------|------|-------------------------------------------------------------------------|------|------|
|      |                                   | 1-1/2"                                                             | 2"   | 3"   | 1-1/2"                                                                  | 2"   | 3"   |
| 28   | 298                               | 670                                                                | 744  | 869  | 721                                                                     | 799  | 909  |
| 26   | 298                               | 694                                                                | 764  | 889  | 745                                                                     | 823  | 933  |
| 24   | 355                               | 870                                                                | 952  | 1092 | 900                                                                     | 987  | 1124 |
| 22   | 439                               | 1071                                                               | 1164 | 1324 | 1090                                                                    | 1187 | 1354 |

Note: All section properties and ASD flexural strengths are calculated in accordance with AISI/S100-2017, AISI S100-2017 and AISI S100-2016.

Table 1 Allowable wind pressures for panels over spaced supports

| Assembly No. | PANEL                             | SUPPORT <sup>1</sup>  | FASTENING PATTERN <sup>2</sup>                                                                                 | SPAC (inches) | ALLOWABLE NEGATIVE PRESSURE (psf) | ALLOWABLE POSITIVE PRESSURE (psf) |
|--------------|-----------------------------------|-----------------------|----------------------------------------------------------------------------------------------------------------|---------------|-----------------------------------|-----------------------------------|
| 1            | HC-18 (24-gauge steel, 18" width) | Steel Spaced Supports | Two (2) #12-14 x 1 1/2" long pan-head screws with 1/4" diameter washer at panel fastening leg at all supports. | 60            | 47                                | 36                                |
| 2            | HC-18 (22-gauge steel, 18" width) | Steel Spaced Supports | Two (2) #12-14 x 1 1/2" long pan-head screws with 1/4" diameter washer at panel fastening leg at all supports. | 60            | 62                                | 36                                |

### STEEL CATALOG PAGE 68

| Assembly No. | PANEL                                                                | SUPPORT <sup>1</sup>  | FASTENING PATTERN <sup>2</sup>                                                   | SPAC (inches) | ALLOWABLE NEGATIVE PRESSURE (psf) | ALLOWABLE POSITIVE PRESSURE (psf) |
|--------------|----------------------------------------------------------------------|-----------------------|----------------------------------------------------------------------------------|---------------|-----------------------------------|-----------------------------------|
| 6            | HS-12 (24-gauge steel, 12" width) or HS-8 (24-gauge steel, 8" width) | Steel Spaced Supports | Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports. | 60            | 44                                | 20                                |
| 7            | HS-12 (22-gauge steel, 12" width) or HS-8 (22-gauge steel, 8" width) | Steel Spaced Supports | Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports. | 60            | 72                                | 20                                |

|    |                                   |                       |                                                                                  |    |    |     |
|----|-----------------------------------|-----------------------|----------------------------------------------------------------------------------|----|----|-----|
| 10 | HL-16 (24-gauge steel, 16" width) | Steel Spaced Supports | Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports. | 60 | 66 | 90  |
| 11 | HL-16 (22-gauge steel, 16" width) | Steel Spaced Supports | Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports. | 60 | 62 | 125 |

|    |                                                                                                                                                   |                       |                                                                                                                                                                                   |    |    |    |
|----|---------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----|----|
| 14 | FW-12 with grooves (24-gauge steel, 12" width) or FW-1025 with grooves (24-gauge steel, 10.25" width)                                             | Steel Spaced Supports | Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports. Sidelap fasteners are 1/4" x 1/4" long HWH screw with EPDM washer @ 24" o.c. along panel length. | 60 | 45 | 50 |
| 15 | FW-12 with grooves and seam lock feature (24-gauge steel, 12" width) or FW-1025 with grooves and seam lock feature (24-gauge steel, 10.25" width) | Steel Spaced Supports | Two (2) #12-14 x 1 1/2" long HWH screws with 1/4" diameter washer at panel fastening leg at all supports.                                                                         | 60 | 31 | 50 |
| 16 | FW-12 with grooves (22-gauge steel, 12" width) or FW-1025 with grooves (22-gauge steel, 10.25" width)                                             | Steel Spaced Supports | Two (2) #10-16 x 1" long pan-head screws at panel fastening leg at all supports. Sidelap fasteners are 1/4" x 1/4" long screw @ 24" o.c. along panel length.                      | 60 | 70 | 70 |