


DECKING PRODUCT SUBMITTAL


1316FD-FY50-16-G40

PRODUCT	GRADE	GAUGE	COATING
1 5/16" Form Deck	Grade 50	16 ga	G40

PRODUCT VIEW

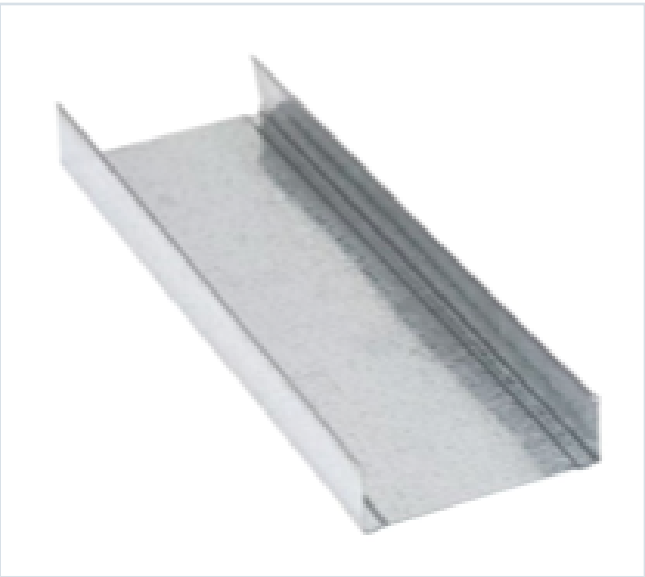

PROFILE DRAWING

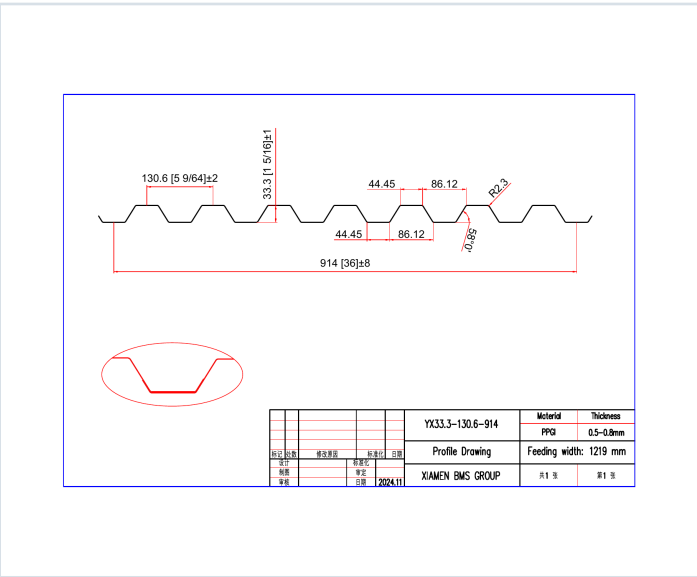

SECTION PROPERTIES · 16 GAUGE

Thickness (in.)	Weight (psf)	Fy (ksi)	S+ (in ³ /ft)	S- (in ³ /ft)	M+ (in-lb/ft)	M- (in-lb/ft)	I+ (in ⁴ /ft)	I- (in ⁴ /ft)
0.0598	3.0	50	0.390	0.378	11667	11327	0.363	0.341

SOURCE AND USE

- Source: Refined Metal Steel Catalog 2025, published pages 70, 71
- ASD section values above are the exact published row for this grade and gauge.
- Coating selection does not change the published structural performance values.
- Verify project-specific loading, fastening, span, concrete, and code requirements with the design professional.

PUBLISHED PERFORMANCE DATA


1316FD-FY50-16-G40 · 16 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 70

GRADE 50 STEEL



Section Properties

Gage	Design Thickness (inches)	Weight (lb/ft)	E, ksi	S _x (in ³ /ft)	S _y (in ³ /ft)	ASD (0 + 1.6S _x) (in ³ /ft)	ASD (0 + 1.6S _y) (in ³ /ft)	I _x (in ⁴ /ft)	I _y (in ⁴ /ft)
22	0.0096	16	50	0.179	0.170	0.308	0.308	0.107	0.144
20	0.0108	20	50	0.222	0.216	0.368	0.368	0.130	0.182
18	0.0124	24	50	0.266	0.256	0.432	0.432	0.156	0.212
16	0.0144	32	50	0.350	0.338	0.584	0.584	0.206	0.277

Note: All section properties and ASD flexural strengths are calculated in accordance with AISI/S430-2017, AISI S430-2017 and AISI S430-2018.

Shear and Web Crippling

Gage	V _u (lb/ft)	Web Crippling (R _u) (lb/ft) One Flange Loading	Web Crippling (R _u) (lb/ft) Two Flange Loading	Web Crippling (R _u) (lb/ft) One Flange Loading	Web Crippling (R _u) (lb/ft) Two Flange Loading
22	2424	803	880	1015	1096
20	3033	1015	1103	1265	1353
18	3642	1226	1323	1535	1633
16	4251	1437	1543	1805	1913

Note: All section properties and ASD flexural strengths are calculated in accordance with AISI/S430-2017, AISI S430-2017 and AISI S430-2018.

Allowable Uniform Downward Loads, ASD (PSF)

Span Single	Gage	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
22	1/3	108	98	88	78	68	58	48	38	28
20	1/3	136	124	112	100	88	76	64	52	40
18	1/3	164	150	136	122	108	94	80	66	52
16	1/3	192	176	160	144	128	112	96	80	64
Double	22	136	124	112	100	88	76	64	52	40
20	172	160	144	128	112	96	80	64	52	40
18	208	192	176	160	144	128	112	96	80	64
16	244	224	208	192	176	160	144	128	112	96
Triple	22	170	154	138	122	106	90	74	58	42
20	216	196	176	156	136	116	96	76	56	36
18	264	240	216	192	168	144	120	96	72	48
16	312	288	264	240	216	192	168	144	120	96

Note: 1. All section properties and ASD (0 + 1.6S_x) uniform loads are calculated in accordance with AISI/S430-2017, AISI S430-2017 and AISI S430-2018.
2. Loads shown in tables are uniformly distributed superimposed loads in psf. Span length assumes center-to-center spacing of supports. Tabulated loads shall not be increased by assuming clear span dimensions.
3. Bending Moment (k-in) used for design shall be determined as Single and Two Span M_u = 8 M_u Three Span or More M_u = 10 M_u
4. Web crippling and shear have not been accounted for in these tables. Required bearing should be determined based on specific span condition.

STEEL CATALOG PAGE 71

Span Single	Gage	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
22	1/3	108	98	88	78	68	58	48	38	28
20	1/3	136	124	112	100	88	76	64	52	40
18	1/3	164	150	136	122	108	94	80	66	52
16	1/3	192	176	160	144	128	112	96	80	64
Double	22	136	124	112	100	88	76	64	52	40
20	172	160	144	128	112	96	80	64	52	40
18	208	192	176	160	144	128	112	96	80	64
16	244	224	208	192	176	160	144	128	112	96
Triple	22	170	154	138	122	106	90	74	58	42
20	216	196	176	156	136	116	96	76	56	36
18	264	240	216	192	168	144	120	96	72	48
16	312	288	264	240	216	192	168	144	120	96

Note: For loads that cause L/120 Deflection, multiply by 2.0. For loads that cause L/180 Deflection, multiply by 1.5. For loads that cause L/360 Deflection, multiply by 0.67.

Construction Span Table – 20 psf Construction Load

Total Slab Depth	Deck Type	Maximum Unshored Clear Span	1 span	2 span	3 span
150 (1200) 16 PSF	15x16x20 ga	8'-0"	7'-9"	7'-11"	7'-11"
150 (1200) 16 PSF	15x16x18 ga	7'-9"	7'-8"	7'-10"	7'-10"
150 (1200) 16 PSF	15x16x16 ga	7'-8"	7'-7"	7'-9"	7'-9"
400 (1200) 42 PSF	15x16x22 ga	6'-4"	6'-3"	6'-5"	6'-5"
400 (1200) 42 PSF	15x16x20 ga	7'-4"	7'-3"	7'-5"	7'-5"
400 (1200) 42 PSF	15x16x18 ga	6'-3"	6'-2"	6'-4"	6'-4"
400 (1200) 42 PSF	15x16x16 ga	6'-2"	6'-1"	6'-3"	6'-3"
450 (1200) 48 PSF	15x16x22 ga	6'-0"	5'-9"	6'-1"	6'-1"
450 (1200) 48 PSF	15x16x20 ga	7'-0"	6'-9"	7'-1"	7'-1"
450 (1200) 48 PSF	15x16x18 ga	6'-0"	5'-9"	6'-1"	6'-1"
450 (1200) 48 PSF	15x16x16 ga	5'-10"	5'-9"	6'-0"	6'-0"
500 (1200) 54 PSF	15x16x22 ga	5'-10"	5'-9"	6'-0"	6'-0"
500 (1200) 54 PSF	15x16x20 ga	6'-8"	6'-7"	6'-9"	6'-9"
500 (1200) 54 PSF	15x16x18 ga	5'-8"	5'-7"	5'-9"	5'-9"
500 (1200) 54 PSF	15x16x16 ga	5'-6"	5'-5"	5'-7"	5'-7"
600 (1200) 66 PSF	15x16x22 ga	5'-5"	5'-4"	5'-6"	5'-6"
600 (1200) 66 PSF	15x16x20 ga	6'-5"	6'-4"	6'-6"	6'-6"
600 (1200) 66 PSF	15x16x18 ga	5'-5"	5'-4"	5'-6"	5'-6"
600 (1200) 66 PSF	15x16x16 ga	5'-4"	5'-3"	5'-5"	5'-5"

Note: Web crippling and shear have not been accounted for in these tables. Required bearing should be determined based on specific span condition.