


DECKING PRODUCT SUBMITTAL


1316FD-FY50-20-G40

PRODUCT	GRADE	GAUGE	COATING
1 5/16" Form Deck	Grade 50	20 ga	G40

PRODUCT VIEW

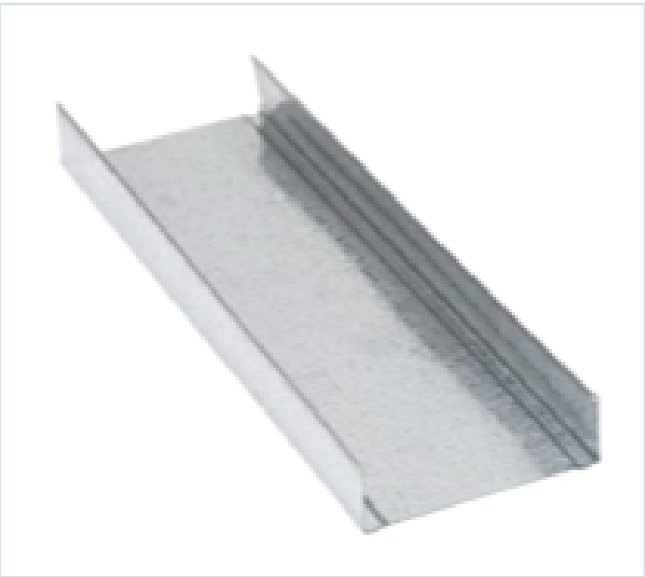

PROFILE DRAWING

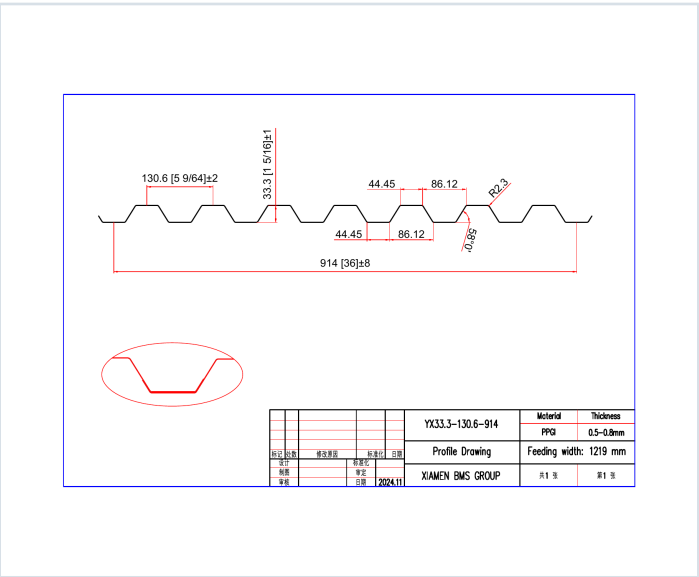

SECTION PROPERTIES · 20 GAUGE

Thickness (in.)	Weight (psf)	Fy (ksi)	S+ (in ³ /ft)	S- (in ³ /ft)	M+ (in-lb/ft)	M- (in-lb/ft)	I+ (in ⁴ /ft)	I- (in ⁴ /ft)
0.0358	2.0	50	0.222	0.216	6661	6457	0.210	0.182

SOURCE AND USE

1. Source: Refined Metal Steel Catalog 2025, published pages 70, 71
2. ASD section values above are the exact published row for this grade and gauge.
3. Coating selection does not change the published structural performance values.
4. Verify project-specific loading, fastening, span, concrete, and code requirements with the design professional.

PUBLISHED PERFORMANCE DATA


1316FD-FY50-20-G40 · 20 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 70

GRADE 50 STEEL



Section Properties

Gage	Design Thickness (inches)	Weight (lb/ft)	E (ksi)	S_x (in ³ /ft)	S_y (in ³ /ft)	ASD ($\phi = 1.67$) M_x / ϕ (in ³ -kips/ft)	M_y / ϕ (in ³ -kips/ft)	I_x (in ⁴ /ft)	I_y (in ⁴ /ft)
22	0.0096	16	30	0.179	0.070	6308	608	0.107	0.144
20	0.0098	20	30	0.222	0.216	6681	6407	0.210	0.382
18	0.0099	26	30	0.300	0.294	6981	6902	0.290	0.297
16	0.0098	32	30	0.390	0.378	10667	10327	0.363	0.341

Note: All section properties and ASD flexural strengths are calculated in accordance with AISI/S430-2017, AISI S430-2017 and AISI S430-2018.

Shear and Web Crippling

Gage	V_u/ϕ (lb/ft)	Web Crippling (R_u), lb/ft One Flange Loading End Bearing			Web Crippling (R_u), lb/ft One Flange Loading Interior Bearing		
		1-1/2"	2"	3"	1-1/2"	2"	3"
22	2424	803	880	1015	1096	1189	1345
20	3053	1043	1253	1436	1605	1726	1953
18	5032	1894	2087	2377	2773	2983	3354
16	6299	2591	3383	3806	4240	4604	5172

Note: All section properties and ASD flexural strengths are calculated in accordance with AISI/S430-2017, AISI S430-2017 and AISI S430-2018.

Allowable Uniform Downward Loads, ASD (PSF)

Span	Gage	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"	12'-6"
Single	22	543	588	633	678	723	768	813	858	903	948
	20	178	187	195	204	212	221	229	238	246	255
	18	248	255	262	269	276	283	290	297	304	311
	16	311	327	343	359	375	391	407	423	439	455
Double	22	158	167	175	184	192	201	209	218	226	235
	20	172	180	188	196	204	212	220	228	236	244
	18	235	243	251	259	267	275	283	291	299	307
	16	302	310	318	326	334	342	350	358	366	374
Triple	22	170	178	186	194	202	210	218	226	234	242
	20	275	283	291	299	307	315	323	331	339	347
	18	284	292	300	308	316	324	332	340	348	356
	16	378	386	394	402	410	418	426	434	442	450

- Notes:
- All section properties and ASD ($\phi = 1.67$) uniform loads are calculated in accordance with AISI/S430-2017, AISI S430-2017 and AISI S430-2018.
 - Loads shown in tables are uniformly distributed superimposed loads in psf. Span length assumes center-to-center spacing of supports. Tabulated loads shall not be increased by assuming clear span dimensions.
 - Bending Moment (inches used for design) should be Single and Two Span M^* 8 Three Span or More M^* 10
 - Web crippling and shear have not been accounted for in these tables. Required bearing should be determined based on specific span condition.

STEEL CATALOG PAGE 71

Span	Single	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"	12'-6"
Single	22	68	73	78	83	88	93	98	103	108	113
	20	86	91	96	101	106	111	116	121	126	131
	18	106	111	116	121	126	131	136	141	146	151
	16	125	130	135	140	145	150	155	160	165	170
Double	22	94	100	106	112	118	124	130	136	142	148
	20	107	113	119	125	131	137	143	149	155	161
	18	120	126	132	138	144	150	156	162	168	174
	16	133	139	145	151	157	163	169	175	181	187
Triple	22	129	135	141	147	153	159	165	171	177	183
	20	142	148	154	160	166	172	178	184	190	196
	18	155	161	167	173	179	185	191	197	203	209
	16	168	174	180	186	192	198	204	210	216	222

Note: For loads that cause $L/120$ Deflection, multiply by 2.0. For loads that cause $L/180$ Deflection, multiply by 1.5. For loads that cause $L/360$ Deflection, multiply by 0.67.

Construction Span Table – 20 psf Construction Load

Normal Weight Concrete (145 pcf)						Lightweight Concrete (115 pcf)					
Total Slab Depth	Deck Type	Maximum Unshored Clear Span	1 span	2 span	3 span	Total Slab Depth	Deck Type	Maximum Unshored Clear Span	1 span	2 span	3 span
15'-0" (2x10) 42 PSF	15x6x22 ga	8'-0"	7'-9"	7'-8"	7'-7"	15'-0" (2x10) 27 PSF	15x6x22 ga	8'-0"	7'-9"	7'-8"	7'-7"
	15x6x18 ga	7'-9"	7'-8"	7'-7"	7'-6"		15x6x18 ga	7'-9"	7'-8"	7'-7"	7'-6"
	15x6x16 ga	7'-8"	7'-7"	7'-6"	7'-5"		15x6x16 ga	7'-8"	7'-7"	7'-6"	7'-5"
	15x6x14 ga	7'-7"	7'-6"	7'-5"	7'-4"		15x6x14 ga	7'-7"	7'-6"	7'-5"	7'-4"
4'-0" (2x6) 42 PSF	15x6x22 ga	6'-4"	6'-3"	6'-2"	6'-1"	4'-0" (2x6) 27 PSF	15x6x22 ga	6'-4"	6'-3"	6'-2"	6'-1"
	15x6x18 ga	6'-3"	6'-2"	6'-1"	6'-0"		15x6x18 ga	6'-3"	6'-2"	6'-1"	6'-0"
	15x6x16 ga	6'-2"	6'-1"	6'-0"	5'-11"		15x6x16 ga	6'-2"	6'-1"	6'-0"	5'-11"
	15x6x14 ga	6'-1"	6'-0"	5'-11"	5'-10"		15x6x14 ga	6'-1"	6'-0"	5'-11"	5'-10"
4'-0" (3x10) 48 PSF	15x6x22 ga	6'-0"	5'-9"	5'-8"	5'-7"	4'-0" (3x10) 27 PSF	15x6x22 ga	6'-0"	5'-9"	5'-8"	5'-7"
	15x6x18 ga	5'-9"	5'-8"	5'-7"	5'-6"		15x6x18 ga	5'-9"	5'-8"	5'-7"	5'-6"
	15x6x16 ga	5'-8"	5'-7"	5'-6"	5'-5"		15x6x16 ga	5'-8"	5'-7"	5'-6"	5'-5"
	15x6x14 ga	5'-7"	5'-6"	5'-5"	5'-4"		15x6x14 ga	5'-7"	5'-6"	5'-5"	5'-4"
5'-0" (3x5) 54 PSF	15x6x22 ga	5'-10"	5'-9"	5'-8"	5'-7"	5'-0" (3x5) 27 PSF	15x6x22 ga	5'-10"	5'-9"	5'-8"	5'-7"
	15x6x18 ga	5'-9"	5'-8"	5'-7"	5'-6"		15x6x18 ga	5'-9"	5'-8"	5'-7"	5'-6"
	15x6x16 ga	5'-8"	5'-7"	5'-6"	5'-5"		15x6x16 ga	5'-8"	5'-7"	5'-6"	5'-5"
	15x6x14 ga	5'-7"	5'-6"	5'-5"	5'-4"		15x6x14 ga	5'-7"	5'-6"	5'-5"	5'-4"
6'-0" (4x10) 60 PSF	15x6x22 ga	5'-8"	5'-7"	5'-6"	5'-5"	6'-0" (4x10) 27 PSF	15x6x22 ga	5'-8"	5'-7"	5'-6"	5'-5"
	15x6x18 ga	5'-7"	5'-6"	5'-5"	5'-4"		15x6x18 ga	5'-7"	5'-6"	5'-5"	5'-4"
	15x6x16 ga	5'-6"	5'-5"	5'-4"	5'-3"		15x6x16 ga	5'-6"	5'-5"	5'-4"	5'-3"
	15x6x14 ga	5'-5"	5'-4"	5'-3"	5'-2"		15x6x14 ga	5'-5"	5'-4"	5'-3"	5'-2"

Note: Web crippling and shear have not been accounted for in these tables. Required bearing should be determined based on specific span condition.