


DECKING PRODUCT SUBMITTAL


15CD-FY40-16-G90

PRODUCT	GRADE	GAUGE	COATING
1.5" Composite Deck	Grade 40	16 ga	G90

PRODUCT VIEW

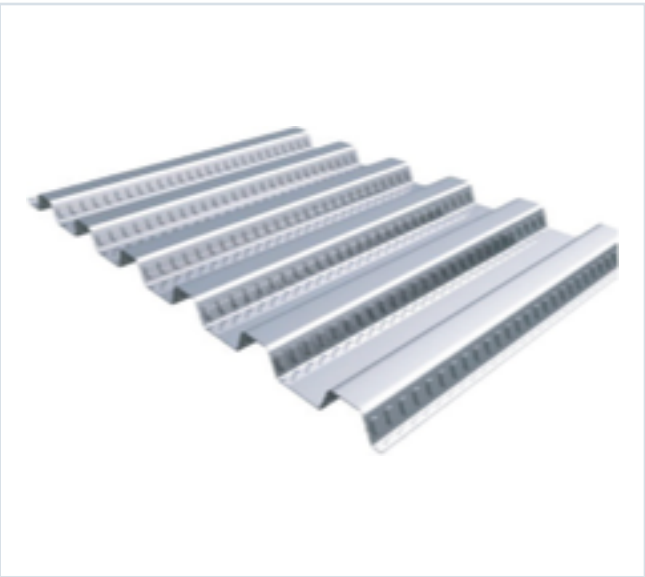

PROFILE DRAWING

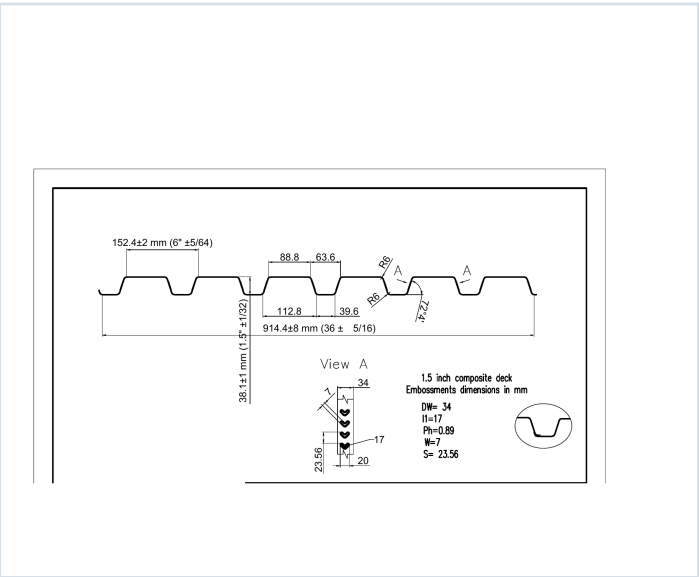

SECTION PROPERTIES · 16 GAUGE

Thickness (in.)	Weight (psf)	Fy (ksi)	S+ (in ³ /ft)	S- (in ³ /ft)	M+ (in-lb/ft)	M- (in-lb/ft)	I+ (in ⁴ /ft)	I- (in ⁴ /ft)
0.0598	3.0	40	0.383	0.390	9166	9333	0.350	0.363

SOURCE AND USE

1. Source: Refined Metal Steel Catalog 2025, published pages 41, 42, 43, 44
2. ASD section values above are the exact published row for this grade and gauge.
3. Coating selection does not change the published structural performance values.
4. Verify project-specific loading, fastening, span, concrete, and code requirements with the design professional.

PUBLISHED PERFORMANCE DATA


15CD-FY40-16-G90 · 16 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 41

GRADE 40 STEEL

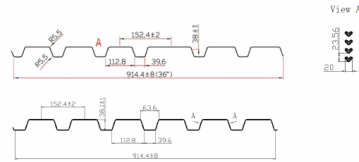

Section Properties

Gage	Depth (inches)	Weight lb/ft	C in ⁴	S _x (in ³) per foot	S _y (in ³) per foot	ASD (σ = 155) M / S _x in ³ -ft per ft	U _x (in ³) per ft	U _y (in ³) per ft
22	0.0096	16	40	0.173	0.094	433	443	0.147
20	0.0098	20	40	0.219	0.231	524	533	0.197
18	0.0074	24	40	0.299	0.332	756	747	0.263
16	0.0098	30	40	0.383	0.390	966	933	0.350

Note: All section properties and ASD flexural strengths are calculated in accordance with ANSI/S3D RD-2017, AISI S100-2017 and AISI S100-2016.

Shear and Web Crippling

Gage	V _u / S _x (ksi/ft)	Web Crippling (R _w), ksi/ft One Flange Loading	Web Crippling (R _w), ksi/ft Interior Bearing
22	1929	640	704
20	3042	860	1002
18	4025	1030	1202
16	4975	1240	1447

Note: All section properties and ASD flexural strengths are calculated in accordance with ANSI/S3D RD-2017, AISI S100-2017 and AISI S100-2016.

Allowable Uniform Downward Loads, ASD (PSF)

Span	Gage	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"
Single	22	110	98	77	65	56	49	43	38	34	31	28
	20	140	116	97	83	71	62	55	48	43	39	35
	18	158	132	102	87	75	65	57	50	45	41	37
	16	244	202	170	145	125	109	95	85	75	68	63
Double	22	168	147	117	100	87	75	65	57	50	45	41
	20	248	202	170	145	125	109	95	85	75	68	63
	18	304	248	202	170	145	125	109	95	85	75	68
	16	399	304	248	202	170	145	125	109	95	85	75
Triples	22	147	122	102	87	75	65	57	50	45	41	37
	20	244	192	158	132	116	102	87	75	65	57	50
	18	249	206	173	147	127	111	97	86	77	69	62
	16	381	297	236	194	159	130	112	100	90	80	72

Note: 1. All section properties and ASD (σ = 155) uniform loads are calculated in accordance with ANSI/S3D RD-2017, AISI S100-2017 and AISI S100-2016.
2. Loads shown in table are uniformly distributed superimposed loads in psf. Span length assumes center-to-center spacing of supports. Tabulated loads shall not be increased by assuming clear span conditions.
3. Bending Moment formula used for fixed-end stress limitations are: Single and Two Span: $M = \frac{wL^2}{8}$; Three Span or More: $M = \frac{wL^2}{16}$
4. Web-crippling and clear have not been accounted for in these tables. Required bearing should be determined based on specific span conditions.

STEEL CATALOG PAGE 42

Span	Gage	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"
Single	22	77	58	45	35	28	23	19	16	13	11	10
	20	98	74	57	45	36	29	24	20	17	14	12
	18	109	80	60	45	36	30	24	20	17	14	12
	16	134	100	74	57	45	36	30	24	20	17	14
Double	22	168	147	117	100	87	75	65	57	50	45	41
	20	248	202	170	145	125	109	95	85	75	68	63
	18	304	248	202	170	145	125	109	95	85	75	68
	16	399	304	248	202	170	145	125	109	95	85	75
Triples	22	147	122	102	87	75	65	57	50	45	41	37
	20	244	192	158	132	116	102	87	75	65	57	50
	18	249	206	173	147	127	111	97	86	77	69	62
	16	381	297	236	194	159	130	112	100	90	80	72

Note: For loads that cause L/120 Deflection, multiply by 2.0. For loads that cause L/180 Deflection, multiply by 1.5. For loads that cause L/360 Deflection, multiply by 0.67.

Construction Span Table – 20 psf Construction Load

Total Slab Depth	Normal Weight Concrete (145 pcf)				Total Slab Depth	Lightweight Concrete (115 pcf)			
	Deck Type	Maximum Unshored Clear Span	1 span	2 spans		Deck Type	Maximum Unshored Clear Span	1 span	2 spans
350 (14-250) 31 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"	350 (14-250) 31 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"
	15x10x18 ga	6'-0"	7'-10"	7'-10"		15x10x18 ga	6'-0"	7'-10"	7'-10"
	15x10x16 ga	6'-0"	7'-10"	7'-10"		15x10x16 ga	6'-0"	7'-10"	7'-10"
	15x10x14 ga	6'-0"	7'-10"	7'-10"		15x10x14 ga	6'-0"	7'-10"	7'-10"
400 (14-250) 37 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"	400 (14-250) 37 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"
	15x10x18 ga	6'-0"	7'-10"	7'-10"		15x10x18 ga	6'-0"	7'-10"	7'-10"
	15x10x16 ga	6'-0"	7'-10"	7'-10"		15x10x16 ga	6'-0"	7'-10"	7'-10"
	15x10x14 ga	6'-0"	7'-10"	7'-10"		15x10x14 ga	6'-0"	7'-10"	7'-10"
450 (14-300) 43 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"	450 (14-300) 43 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"
	15x10x18 ga	6'-0"	7'-10"	7'-10"		15x10x18 ga	6'-0"	7'-10"	7'-10"
	15x10x16 ga	6'-0"	7'-10"	7'-10"		15x10x16 ga	6'-0"	7'-10"	7'-10"
	15x10x14 ga	6'-0"	7'-10"	7'-10"		15x10x14 ga	6'-0"	7'-10"	7'-10"
500 (14-400) 49 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"	500 (14-400) 49 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"
	15x10x18 ga	6'-0"	7'-10"	7'-10"		15x10x18 ga	6'-0"	7'-10"	7'-10"
	15x10x16 ga	6'-0"	7'-10"	7'-10"		15x10x16 ga	6'-0"	7'-10"	7'-10"
	15x10x14 ga	6'-0"	7'-10"	7'-10"		15x10x14 ga	6'-0"	7'-10"	7'-10"
550 (14-450) 55 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"	550 (14-450) 55 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"
	15x10x18 ga	6'-0"	7'-10"	7'-10"		15x10x18 ga	6'-0"	7'-10"	7'-10"
	15x10x16 ga	6'-0"	7'-10"	7'-10"		15x10x16 ga	6'-0"	7'-10"	7'-10"
	15x10x14 ga	6'-0"	7'-10"	7'-10"		15x10x14 ga	6'-0"	7'-10"	7'-10"
600 (14-500) 61 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"	600 (14-500) 61 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"
	15x10x18 ga	6'-0"	7'-10"	7'-10"		15x10x18 ga	6'-0"	7'-10"	7'-10"
	15x10x16 ga	6'-0"	7'-10"	7'-10"		15x10x16 ga	6'-0"	7'-10"	7'-10"
	15x10x14 ga	6'-0"	7'-10"	7'-10"		15x10x14 ga	6'-0"	7'-10"	7'-10"

Note: Web-crippling and clear have not been accounted for in these tables. Required bearing should be determined based on specific span conditions.

PUBLISHED PERFORMANCE DATA

15CD-FY40-16-G90 · 16 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 43

22 ga Normalweight Concrete (145 pcf, $f'c = 3,000$ psi)

Slab Thickness (inches)	Weight (psf)	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"
3.5	31	400	354	295	249	212	182	158
4	37	400	400	372	334	298	231	200
4.5	43	400	400	400	383	326	281	244
5	49	400	400	400	400	387	331	290
5.5	55	400	400	400	400	400	387	338
6	61	400	400	400	400	400	400	383

Slab Thickness (inches)	8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
3.5	138	121	107	95	84	75	67	60
4	175	154	135	120	107	96	86	77
4.5	215	188	166	147	131	118	106	95
5	254	225	197	173	156	142	128	115
5.5	294	259	229	204	180	163	148	132
6	335	296	262	233	208	186	168	151

20/18/16 ga Normalweight Concrete (145 pcf, $f'c = 3,000$ psi)

Slab Thickness (inches)	Weight (psf)	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"
3.5	31	400	400	359	313	259	223	194
4	37	400	400	400	383	328	283	248
4.5	43	400	400	400	400	400	345	310
5	49	400	400	400	400	400	400	357
5.5	55	400	400	400	400	400	400	400
6	61	400	400	400	400	400	400	400

Slab Thickness (inches)	8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
3.5	170	150	132	118	105	94	85	76
4	215	190	168	150	134	120	108	98
4.5	263	232	206	183	164	147	133	120
5	313	278	245	218	195	176	158	143
5.5	364	321	285	254	227	204	184	167
6	400	387	326	290	260	234	211	191

Note
In case of the profile of the embossments, there is no gain in strength for the composite deck-slab when the deck gets thicker than 20 gauge. However, the construction spans do get longer for 18 and 16 gauge deck.

STEEL CATALOG PAGE 44

Slab Thickness (inches)	Weight (psf)	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"
3.5	23	400	341	285	241	206	178	154
4	28	400	400	361	308	261	225	196
4.5	33	400	400	400	372	319	275	239
5	37	400	400	400	400	379	327	285
5.5	42	400	400	400	400	400	380	332
6	46	400	400	400	400	400	400	379

Slab Thickness (inches)	8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
3.5	135	119	106	94	84	75	68	61
4	172	150	136	120	107	96	87	78
4.5	210	185	164	146	131	118	106	96
5	250	221	196	175	157	141	127	115
5.5	291	257	228	204	182	164	148	134
6	333	294	261	233	209	188	170	154

20/18/16 ga Lightweight Concrete (115 pcf, $f'c = 3,000$ psi)

Slab Thickness (inches)	Weight (psf)	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"
3.5	23	400	400	344	291	249	216	188
4	28	400	400	400	378	321	274	238
4.5	33	400	400	400	400	388	335	292
5	37	400	400	400	400	400	400	349
5.5	42	400	400	400	400	400	400	400
6	46	400	400	400	400	400	400	400

Slab Thickness (inches)	8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
3.5	165	145	129	115	104	93	84	76
4	203	180	160	142	125	110	100	91
4.5	242	217	202	180	162	146	132	119
5	284	251	241	218	194	174	158	145
5.5	327	291	281	251	226	203	184	167
6	400	382	322	288	259	235	211	192

Note
In case of the profile of the embossments, there is no gain in strength for the composite deck-slab when the deck gets thicker than 20 gauge. However, the construction spans do get longer for 18 and 16 gauge deck.