





DECKING PRODUCT SUBMITTAL

PRODUCT	GRADE	GAUGE	COATING
1.5" Composite Deck	Grade 40	18 ga	G60

PRODUCT VIEW

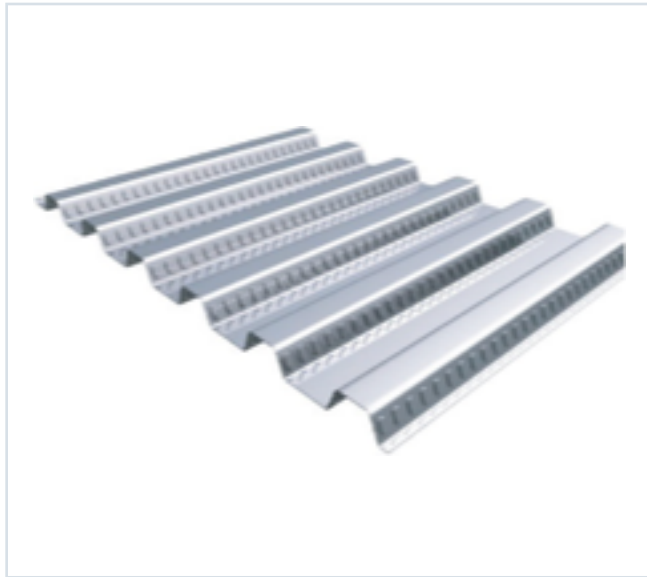

PROFILE DRAWING

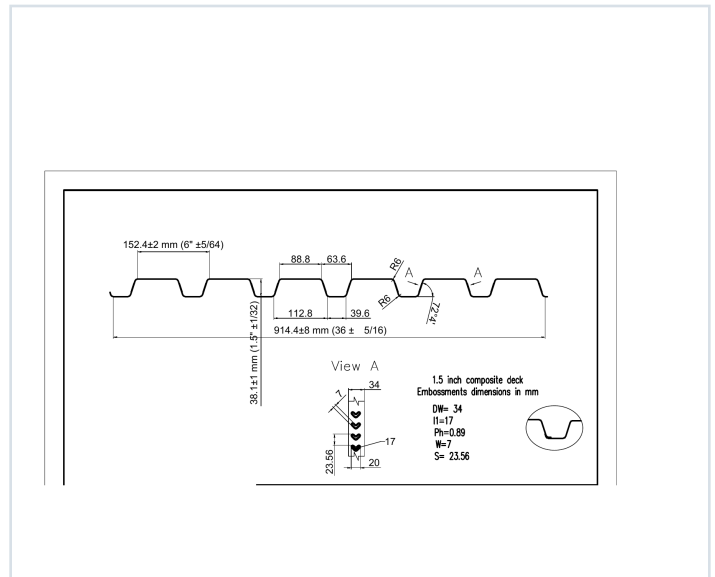

SECTION PROPERTIES · 18 GAUGE

Thickness (in.)	Weight (psf)	Fy (ksi)	S+ (in³/ft)	S- (in³/ft)	M+ (in-lb/ft)	M- (in-lb/ft)	I+ (in■/ft)	I- (in■/ft)
0.0474	2.6	40	0.299	0.312	7154	7473	0.263	0.290

SOURCE AND USE

1. Source: Refined Metal Steel Catalog 2025, published pages 41, 42, 43, 44
2. ASD section values above are the exact published row for this grade and gauge.
3. Coating selection does not change the published structural performance values.
4. Verify project-specific loading, fastening, span, concrete, and code requirements with the design professional.

PUBLISHED PERFORMANCE DATA


15CD-FY40-18-G60 · 18 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 41

GRADE 40 STEEL

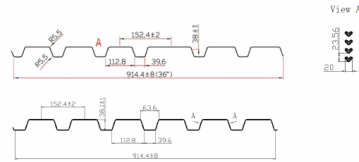

Section Properties

Gage	Depth (inches)	Weight lb/ft	E ksi	S _x (in ³) per foot	S _y (in ³) per foot	ASD (d = 1/8") M _t / d (in ² -lb per ft)	U _t (in ²) per ft.	U _y (in ²) per ft.
22	0.0096	16	40	0.173	0.094	433	443	0.147
20	0.0098	20	40	0.219	0.231	524	533	0.192
18	0.0074	24	40	0.299	0.332	756	747	0.263
16	0.0098	30	40	0.383	0.390	966	933	0.350

Note: All section properties and ASD flexural strengths are calculated in accordance with ANSI/S3D RD-2017, ANSI S308-2017 and ANSI S308-2016.

Shear and Web Crippling

Gage	V _u /Q (lb/ft)	Web Crippling (R _u), lb/ft One Flange Loading End Bearing	Web Crippling (R _u), lb/ft One Flange Loading Interior Bearing
22	1939	640	850
20	3042	865	1002
18	4025	1030	1192
16	4995	1245	1447

Note: All section properties and ASD flexural strengths are calculated in accordance with ANSI/S3D RD-2017, ANSI S308-2017 and ANSI S308-2016.

Allowable Uniform Downward Loads, ASD (PSF)

Span	Gage	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"
Single	22	110	98	77	65	56	49	43	38	34	31	28
	20	140	116	97	83	71	62	55	48	43	39	35
	18	158	132	102	86	75	65	57	49	44	40	36
	16	244	202	170	145	125	109	95	85	75	68	63
Double	22	168	147	112	95	82	70	62	54	48	44	39
	20	248	202	170	145	125	109	95	85	75	68	63
	18	304	248	202	170	145	125	109	95	85	75	68
	16	399	324	268	222	192	167	147	127	111	97	86
Triple	22	147	122	102	87	75	65	57	51	45	41	37
	20	184	152	128	109	94	82	72	64	57	51	46
	18	249	206	173	147	127	111	97	86	77	69	62
	16	331	287	236	194	169	147	127	111	97	86	78

Note: 1. All section properties and ASD (d = 1/8") uniform loads are calculated in accordance with ANSI/S3D RD-2017, ANSI S308-2017 and ANSI S308-2016.
2. Loads shown in table are uniformly distributed superimposed loads in psf. Span length assumes center-to-center spacing of supports. Tabulated loads shall not be increased by assuming clear span conditions.
3. Bending Moment formula used for fixed-end stress limitations are: Single and Two Span: $M = \frac{wL^2}{8}$; Three Span or More: $M = \frac{wL^2}{16}$
4. Web crippling and clear have not been accounted for in these tables. Required bearing should be determined based on specific span conditions.

STEEL CATALOG PAGE 42

Span	Gage	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"
Single	22	77	58	45	35	28	23	19	16	13	11	10
	20	98	74	57	45	36	29	24	20	17	14	12
	18	109	80	61	50	41	34	28	24	20	17	14
	16	164	138	106	84	67	54	45	37	31	27	23
Double	22	168	147	112	95	82	70	62	54	48	44	39
	20	236	197	167	140	120	104	90	78	68	60	54
	18	313	250	203	167	141	121	105	91	79	69	62
	16	443	353	284	231	193	161	138	119	103	89	78
Triple	22	140	109	84	66	53	43	35	30	25	21	18
	20	185	139	107	84	67	55	45	38	32	27	23
	18	240	186	140	109	86	70	58	49	41	35	30
	16	346	280	200	158	126	103	85	71	59	51	43

Note: For loads that cause L/120 Deflection, multiply by 2.0. For loads that cause L/180 Deflection, multiply by 1.5. For loads that cause L/360 Deflection, multiply by 0.67.

Construction Span Table – 20 psf Construction Load

Total Slab Depth	Normal Weight Concrete (145 pcf)				Total Slab Depth	Lightweight Concrete (115 pcf)			
	Deck Type	Maximum Unshored Clear Span	1 span	2 span		Deck Type	Maximum Unshored Clear Span	1 span	2 span
350 (h=200) 31 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"	350 (h=200) 31 PSF	15x10x22 ga	6'-0"	8'-0"	8'-0"
	15x10x18 ga	6'-0"	7'-0"	7'-0"		15x10x18 ga	7'-0"	8'-0"	8'-0"
	15x10x16 ga	6'-0"	7'-0"	7'-0"		15x10x16 ga	7'-0"	8'-0"	8'-0"
	15x10x14 ga	6'-0"	7'-0"	7'-0"		15x10x14 ga	7'-0"	8'-0"	8'-0"
400 (h=250) 43 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"	400 (h=250) 43 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"
	15x10x18 ga	6'-0"	7'-0"	7'-0"		15x10x18 ga	6'-0"	7'-0"	7'-0"
	15x10x16 ga	6'-0"	7'-0"	7'-0"		15x10x16 ga	6'-0"	7'-0"	7'-0"
	15x10x14 ga	6'-0"	7'-0"	7'-0"		15x10x14 ga	6'-0"	7'-0"	7'-0"
450 (h=300) 49 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"	450 (h=300) 49 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"
	15x10x18 ga	6'-0"	7'-0"	7'-0"		15x10x18 ga	6'-0"	7'-0"	7'-0"
	15x10x16 ga	6'-0"	7'-0"	7'-0"		15x10x16 ga	6'-0"	7'-0"	7'-0"
	15x10x14 ga	6'-0"	7'-0"	7'-0"		15x10x14 ga	6'-0"	7'-0"	7'-0"
500 (h=350) 55 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"	500 (h=350) 55 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"
	15x10x18 ga	6'-0"	7'-0"	7'-0"		15x10x18 ga	6'-0"	7'-0"	7'-0"
	15x10x16 ga	6'-0"	7'-0"	7'-0"		15x10x16 ga	6'-0"	7'-0"	7'-0"
	15x10x14 ga	6'-0"	7'-0"	7'-0"		15x10x14 ga	6'-0"	7'-0"	7'-0"
600 (h=450) 61 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"	600 (h=450) 61 PSF	15x10x22 ga	5'-4"	8'-0"	8'-0"
	15x10x18 ga	6'-0"	7'-0"	7'-0"		15x10x18 ga	6'-0"	7'-0"	7'-0"
	15x10x16 ga	6'-0"	7'-0"	7'-0"		15x10x16 ga	6'-0"	7'-0"	7'-0"
	15x10x14 ga	6'-0"	7'-0"	7'-0"		15x10x14 ga	6'-0"	7'-0"	7'-0"

Note: Web crippling and clear have not been accounted for in these tables. Required bearing should be determined based on specific span conditions.

PUBLISHED PERFORMANCE DATA

15CD-FY40-18-G60 · 18 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 43

22 ga Normalweight Concrete (145 pcf, $f'c = 3,000$ psi)									
Slab Thickness (inches)	Weight (psf)	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	
3.5	31	400	354	295	249	212	182	158	
4	37	400	400	372	334	298	231	200	
4.5	43	400	400	400	383	326	281	244	
5	49	400	400	400	400	387	331	290	
5.5	55	400	400	400	400	400	387	338	
6	61	400	400	400	400	400	400	383	
Slab Thickness (inches)		8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
3.5	138	121	107	95	84	75	67	60	
4	175	154	135	120	107	96	86	77	
4.5	215	188	166	147	131	118	106	95	
5	254	225	197	175	156	142	128	115	
5.5	294	259	229	204	180	163	148	132	
6	335	296	262	233	208	186	168	151	

20/18/16 ga Normalweight Concrete (145 pcf, $f'c = 3,000$ psi)									
Slab Thickness (inches)	Weight (psf)	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	
3.5	31	400	400	359	313	259	223	194	
4	37	400	400	400	383	328	283	248	
4.5	43	400	400	400	400	400	345	300	
5	49	400	400	400	400	400	400	357	
5.5	55	400	400	400	400	400	400	400	
6	61	400	400	400	400	400	400	400	
Slab Thickness (inches)		8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
3.5	170	150	132	118	105	94	85	76	
4	215	190	168	150	134	120	108	98	
4.5	263	232	206	183	164	147	133	120	
5	313	276	245	218	195	176	158	143	
5.5	364	321	285	254	227	204	184	167	
6	400	387	346	290	260	234	211	191	

Note
In case of the profile of the embossments, there is no gain in strength for the composite deck-slab when the deck gets thicker than 20 gauge. However, the construction spans do get longer for 18 and 16 gauge deck.

STEEL CATALOG PAGE 44

20/18/16 ga Normalweight Concrete (145 pcf, $f'c = 3,000$ psi)									
Slab Thickness (inches)	Weight (psf)	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	
3.5	23	400	341	285	241	206	178	154	
4	28	400	400	361	308	261	225	196	
4.5	33	400	400	400	372	319	275	239	
5	37	400	400	400	400	379	327	285	
5.5	42	400	400	400	400	400	380	332	
6	46	400	400	400	400	400	400	379	
Slab Thickness (inches)		8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
3.5	135	119	106	94	84	75	68	61	
4	172	148	134	120	107	96	87	78	
4.5	210	185	164	148	131	118	106	96	
5	250	221	196	175	157	141	127	115	
5.5	289	257	228	204	182	164	148	134	
6	333	294	261	233	209	188	170	154	

20/18/16 ga Lightweight Concrete (115 pcf, $f'c = 3,000$ psi)									
Slab Thickness (inches)	Weight (psf)	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	
3.5	23	400	400	344	291	249	216	188	
4	28	400	400	400	378	321	274	238	
4.5	33	400	400	400	400	388	335	292	
5	37	400	400	400	400	400	400	349	
5.5	42	400	400	400	400	400	400	400	
6	46	400	400	400	400	400	400	400	
Slab Thickness (inches)		8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
3.5	140	125	110	95	84	75	68	61	
4	175	150	135	120	107	96	87	78	
4.5	210	185	165	145	130	118	106	96	
5	245	215	190	165	145	128	115	105	
5.5	280	250	220	195	170	150	135	125	
6	315	285	255	230	205	180	160	145	

Note
In case of the profile of the embossments, there is no gain in strength for the composite deck-slab when the deck gets thicker than 20 gauge. However, the construction spans do get longer for 18 and 16 gauge deck.