


DECKING PRODUCT SUBMITTAL


15CD-FY40-20-G60

PRODUCT	GRADE	GAUGE	COATING
1.5" Composite Deck	Grade 40	20 ga	G60

PRODUCT VIEW

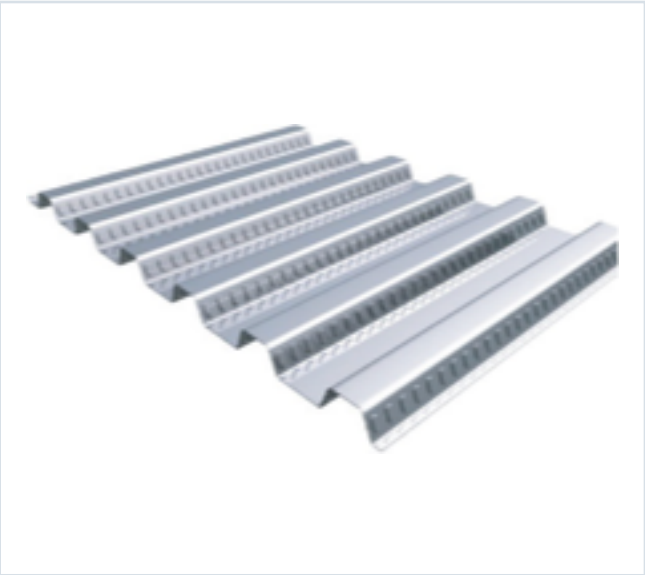

PROFILE DRAWING

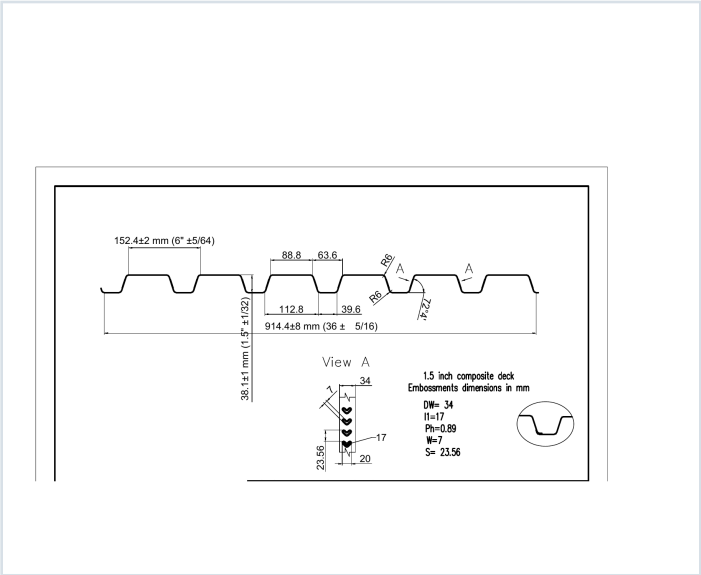

SECTION PROPERTIES · 20 GAUGE

Thickness (in.)	Weight (psf)	Fy (ksi)	S+ (in ³ /ft)	S- (in ³ /ft)	M+ (in-lb/ft)	M- (in-lb/ft)	I+ (in ⁴ /ft)	I- (in ⁴ /ft)
0.0358	2.0	40	0.219	0.231	5246	5533	0.187	0.216

SOURCE AND USE

- Source: Refined Metal Steel Catalog 2025, published pages 41, 42, 43, 44
- ASD section values above are the exact published row for this grade and gauge.
- Coating selection does not change the published structural performance values.
- Verify project-specific loading, fastening, span, concrete, and code requirements with the design professional.

PUBLISHED PERFORMANCE DATA


15CD-FY40-20-G60 · 20 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 41

GRADE 40 STEEL

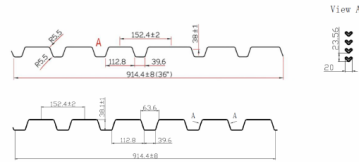

Section Properties

Gage	Depth (inches)	Weight lb/ft	E ksi	S _x (in ³) per foot	S _y (in ³) per foot	ASD (d = 1/8") M _t / d (in ³ -ft) per foot	U _x (in ²) per ft.	U _y (in ²) per ft.
22	0.0096	16	40	0.173	0.094	433	443	0.147
20	0.0098	20	40	0.219	0.231	524	533	0.197
18	0.0074	24	40	0.299	0.332	756	747	0.263
16	0.0098	30	40	0.383	0.390	966	933	0.350

Note: All section properties and ASD flexural strengths are calculated in accordance with ANSI/AISC 360-10, AISC 360-10C and AISC 360-10E.

Shear and Web Crippling

Gage	V _u / d (ksi/ft)	Web Crippling (R _w), ksi/ft One Flange Loading	Web Crippling (R _w), ksi/ft Interior Bearing
22	1939	640	850
20	3042	1002	1369
18	4025	1338	1802
16	4995	1745	2347

Note: All section properties and ASD flexural strengths are calculated in accordance with ANSI/AISC 360-10, AISC 360-10C and AISC 360-10E.

Allowable Uniform Downward Loads, ASD (PSF)

Span	Gage	5'-0"	6'-0"	8'-0"	10'-0"	12'-0"	14'-0"	16'-0"	18'-0"	20'-0"	22'-0"	24'-0"	26'-0"	28'-0"	30'-0"
Single	22	110	98	77	65	56	49	43	38	34	31	28			
	20	140	126	97	83	71	62	55	48	43	39	35			
	18	158	158	132	113	97	85	75	66	59	53	48			
	16	244	232	170	145	125	109	95	85	75	68	63			
Double	22	168	147	112	95	82	70	62	54	48	43	39			
	20	248	222	170	145	125	109	95	85	75	68	63			
	18	268	242	188	162	142	122	107	95	85	77	71			
	16	348	322	242	202	172	147	127	113	100	90	82			
Triple	22	147	122	92	77	65	57	51	45	41	37				
	20	184	162	122	102	86	75	66	58	52	47				
	18	248	222	170	145	125	109	95	85	75	68				
	16	311	287	216	184	159	138	122	108	96	86				

Note: 1. All section properties and ASD (d = 1/8") uniform loads are calculated in accordance with ANSI/AISC 360-10, AISC 360-10C and AISC 360-10E.
2. Loads shown in table are uniformly distributed superimposed loads in psf. Span length assumes center-to-center spacing of supports. Tabulated loads shall not be increased by assuming clear span conditions.
3. Bending Moment formula used for fixed-end stress limitations are: Single and Two Span: $M = \frac{wL^2}{8}$; Three Span or More: $M = \frac{wL^2}{16}$
4. Web crippling and clear have not been accounted for in these tables. Required bearing should be determined based on specific span conditions.

STEEL CATALOG PAGE 42

Span	Gage	5'-0"	6'-0"	8'-0"	10'-0"	12'-0"	14'-0"	16'-0"	18'-0"	20'-0"	22'-0"	24'-0"	26'-0"	28'-0"	30'-0"
Single	22	77	68	48	38	28	23	19	16	13	11	10			
	20	98	84	57	46	36	29	24	20	17	14	12			
	18	109	94	63	50	41	34	28	24	20	17				
	16	164	138	96	76	62	52	43	37	31	27	23			
Double	22	168	147	112	95	82	70	62	54	48	43	39			
	20	248	222	170	145	125	109	95	85	75	68	63			
	18	268	242	188	162	142	122	107	95	85	77	71			
	16	348	322	242	202	172	147	127	113	100	90	82			
Triple	22	147	122	92	77	65	57	51	45	41	37				
	20	184	162	122	102	86	75	66	58	52	47				
	18	248	222	170	145	125	109	95	85	75	68				
	16	311	287	216	184	159	138	122	108	96	86				

Note: For loads that cause L/120 Deflection, multiply by 1.5. For loads that cause L/180 Deflection, multiply by 1.5. For loads that cause L/360 Deflection, multiply by 1.667.

Construction Span Table – 20 psf Construction Load

Total Slab Depth	Normal Weight Concrete (145 pcf)				Lightweight Concrete (115 pcf)			
	Deck Type	Maximum Unshored Clear Span	Span	Span	Deck Type	Maximum Unshored Clear Span	Span	Span
350 (h=250) 31 PSF	15x10x22 ga	5'-4"	6'-0"	6'-0"	15x10x22 ga	5'-4"	6'-0"	6'-0"
	15x10x18 ga	6'-0"	7'-0"	7'-0"	15x10x18 ga	6'-0"	7'-0"	7'-0"
	15x10x16 ga	6'-0"	7'-0"	7'-0"	15x10x16 ga	6'-0"	7'-0"	7'-0"
	15x10x14 ga	6'-0"	7'-0"	7'-0"	15x10x14 ga	6'-0"	7'-0"	7'-0"
400 (h=250) 37 PSF	15x10x22 ga	5'-4"	6'-0"	6'-0"	15x10x22 ga	5'-4"	6'-0"	6'-0"
	15x10x18 ga	6'-0"	7'-0"	7'-0"	15x10x18 ga	6'-0"	7'-0"	7'-0"
	15x10x16 ga	6'-0"	7'-0"	7'-0"	15x10x16 ga	6'-0"	7'-0"	7'-0"
	15x10x14 ga	6'-0"	7'-0"	7'-0"	15x10x14 ga	6'-0"	7'-0"	7'-0"
450 (h=300) 43 PSF	15x10x22 ga	5'-4"	6'-0"	6'-0"	15x10x22 ga	5'-4"	6'-0"	6'-0"
	15x10x18 ga	6'-0"	7'-0"	7'-0"	15x10x18 ga	6'-0"	7'-0"	7'-0"
	15x10x16 ga	6'-0"	7'-0"	7'-0"	15x10x16 ga	6'-0"	7'-0"	7'-0"
	15x10x14 ga	6'-0"	7'-0"	7'-0"	15x10x14 ga	6'-0"	7'-0"	7'-0"
500 (h=350) 49 PSF	15x10x22 ga	5'-4"	6'-0"	6'-0"	15x10x22 ga	5'-4"	6'-0"	6'-0"
	15x10x18 ga	6'-0"	7'-0"	7'-0"	15x10x18 ga	6'-0"	7'-0"	7'-0"
	15x10x16 ga	6'-0"	7'-0"	7'-0"	15x10x16 ga	6'-0"	7'-0"	7'-0"
	15x10x14 ga	6'-0"	7'-0"	7'-0"	15x10x14 ga	6'-0"	7'-0"	7'-0"
550 (h=400) 55 PSF	15x10x22 ga	5'-4"	6'-0"	6'-0"	15x10x22 ga	5'-4"	6'-0"	6'-0"
	15x10x18 ga	6'-0"	7'-0"	7'-0"	15x10x18 ga	6'-0"	7'-0"	7'-0"
	15x10x16 ga	6'-0"	7'-0"	7'-0"	15x10x16 ga	6'-0"	7'-0"	7'-0"
	15x10x14 ga	6'-0"	7'-0"	7'-0"	15x10x14 ga	6'-0"	7'-0"	7'-0"
600 (h=450) 61 PSF	15x10x22 ga	5'-4"	6'-0"	6'-0"	15x10x22 ga	5'-4"	6'-0"	6'-0"
	15x10x18 ga	6'-0"	7'-0"	7'-0"	15x10x18 ga	6'-0"	7'-0"	7'-0"
	15x10x16 ga	6'-0"	7'-0"	7'-0"	15x10x16 ga	6'-0"	7'-0"	7'-0"
	15x10x14 ga	6'-0"	7'-0"	7'-0"	15x10x14 ga	6'-0"	7'-0"	7'-0"

Note: Web crippling and clear have not been accounted for in these tables. Required bearing should be determined based on specific span conditions.

PUBLISHED PERFORMANCE DATA

15CD-FY40-20-G60 · 20 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 43

22 ga Normalweight Concrete (145 pcf, $f'c = 3,000$ psi)									
Slab Thickness (inches)	Weight (psf)	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	
3.5	31	400	354	295	249	212	182	158	
4	37	400	400	372	334	298	231	200	
4.5	43	400	400	400	383	326	281	244	
5	49	400	400	400	400	387	331	290	
5.5	55	400	400	400	400	400	387	338	
6	61	400	400	400	400	400	400	383	
Slab Thickness (inches)		8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
3.5	138	121	107	95	84	75	67	60	
4	175	154	135	120	107	96	86	77	
4.5	215	188	166	147	131	118	106	95	
5	254	225	197	175	156	142	128	115	
5.5	294	259	229	204	180	163	148	132	
6	335	296	262	233	208	186	168	151	

20/18/16 ga Normalweight Concrete (145 pcf, $f'c = 3,000$ psi)									
Slab Thickness (inches)	Weight (psf)	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	
3.5	31	400	400	359	313	259	223	194	
4	37	400	400	400	383	328	283	248	
4.5	43	400	400	400	400	400	345	310	
5	49	400	400	400	400	400	400	357	
5.5	55	400	400	400	400	400	400	400	
6	61	400	400	400	400	400	400	400	
Slab Thickness (inches)		8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
3.5	170	150	132	118	105	94	85	76	
4	215	190	168	150	134	120	108	98	
4.5	263	232	206	183	164	147	133	120	
5	313	276	245	218	195	176	158	143	
5.5	364	321	285	254	227	204	184	167	
6	400	387	346	290	260	234	211	191	

Note
In case of the profile of the embossments, there is no gain in strength for the composite deck-slab when the deck gets thicker than 20 gauge. However, the construction spans do get longer for 18 and 16 gauge deck.

STEEL CATALOG PAGE 44

20/18/16 ga Normalweight Concrete (145 pcf, $f'c = 3,000$ psi)									
Slab Thickness (inches)	Weight (psf)	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	
3.5	23	400	341	285	241	206	178	154	
4	28	400	400	361	308	261	225	196	
4.5	33	400	400	400	372	319	275	239	
5	37	400	400	400	400	379	327	285	
5.5	42	400	400	400	400	400	380	332	
6	46	400	400	400	400	400	400	379	
Slab Thickness (inches)		8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
3.5	135	119	106	94	84	75	68	61	
4	172	148	136	120	107	96	87	78	
4.5	210	185	164	148	131	118	106	96	
5	250	221	196	175	157	141	127	115	
5.5	289	257	228	204	182	164	148	134	
6	333	294	261	233	209	188	170	154	

20/18/16 ga Lightweight Concrete (115 pcf, $f'c = 3,000$ psi)									
Slab Thickness (inches)	Weight (psf)	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	
3.5	23	400	400	344	291	249	216	188	
4	28	400	400	400	378	321	274	238	
4.5	33	400	400	400	400	388	335	292	
5	37	400	400	400	400	400	400	349	
5.5	42	400	400	400	400	400	400	400	
6	46	400	400	400	400	400	400	400	
Slab Thickness (inches)		8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"
3.5	90	142	129	115	104	93	84	76	
4	201	185	165	147	132	118	107	97	
4.5	257	227	202	180	162	146	132	119	
5	306	271	241	216	194	174	158	143	
5.5	357	316	281	251	226	203	184	167	
6	400	362	322	288	259	235	211	192	

Note
In case of the profile of the embossments, there is no gain in strength for the composite deck-slab when the deck gets thicker than 20 gauge. However, the construction spans do get longer for 18 and 16 gauge deck.