





DECKING PRODUCT SUBMITTAL

PRODUCT	GRADE	GAUGE	COATING
1.5" Composite Deck	Grade 50	16 ga	G40

PRODUCT VIEW

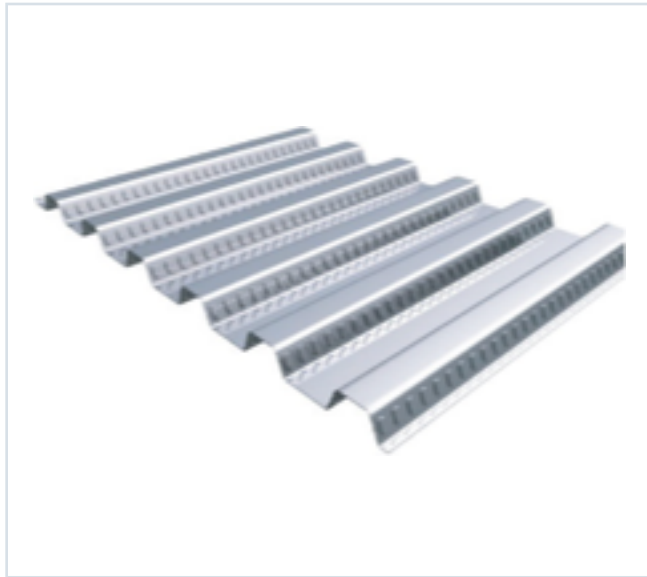

PROFILE DRAWING

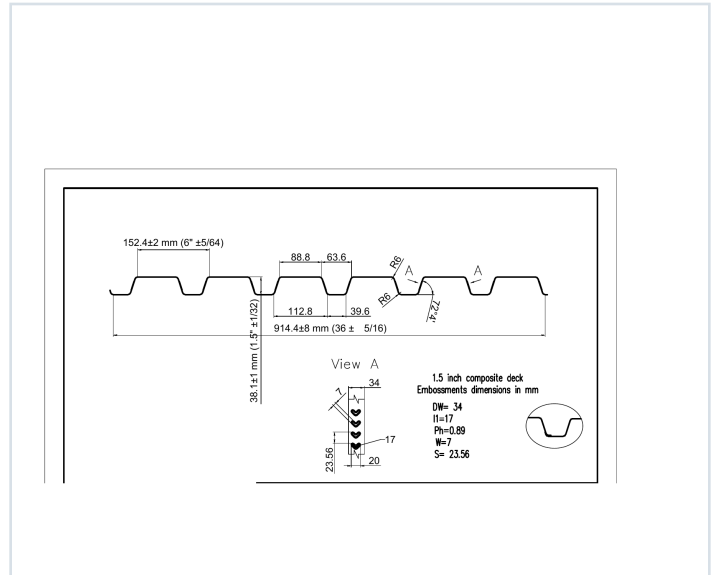

SECTION PROPERTIES · 16 GAUGE

Thickness (in.)	Weight (psf)	Fy (ksi)	S+ (in³/ft)	S- (in³/ft)	M+ (in-lb/ft)	M- (in-lb/ft)	I+ (in⁴/ft)	I- (in⁴/ft)
0.0598	3.0	50	0.378	0.390	11327	11667	0.341	0.363

SOURCE AND USE

1. Source: Refined Metal Steel Catalog 2025, published pages 45, 46, 47, 48
2. ASD section values above are the exact published row for this grade and gauge.
3. Coating selection does not change the published structural performance values.
4. Verify project-specific loading, fastening, span, concrete, and code requirements with the design professional.



Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

[illegible]

Note
Web crippling and shear have not been accounted for in these tables. Required bearing should be determined based on specific span conditions.

PUBLISHED PERFORMANCE DATA

15CD-FY50-16-G40 · 16 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 47

LSC Deck - Wide Flange Up				SINV Deck - Wide Flange Down			
50 ksi				50 ksi			
Live Load	20	psf	with concrete	Live Load	20	psf	with concrete
DL	160	psf		DL	160	psf	
Deck Weight	2	psf		Deck Weight	2	psf	
Live Load	50	psf	without concrete	Live Load	50	psf	without concrete
Total Slab Thickness	Deck Gauge	Maximum Cantilever (inches) NWC	Maximum Cantilever (inches) LWC	Total Slab Thickness	Deck Gauge	Maximum Cantilever (inches) NWC	Maximum Cantilever (inches) LWC
3.5	22	36	36	3.5	22	25	25
3.5	20	31	31	3.5	20	30	30
3.5	18	40	40	3.5	18	38	38
3.5	16	47	47	3.5	16	46	46
4	22	36	36	4	22	25	25
4	20	31	31	4	20	30	30
4	18	40	40	4	18	38	38
4	16	47	47	4	16	46	46
4.5	22	26	26	4.5	22	25	25
4.5	20	31	31	4.5	20	30	30
4.5	18	40	40	4.5	18	38	38
4.5	16	47	47	4.5	16	46	46
5	22	36	36	5	22	25	25
5	20	31	31	5	20	30	30
5	18	40	40	5	18	38	38
5	16	47	47	5	16	46	46
5.5	22	26	26	5.5	22	25	25
5.5	20	31	31	5.5	20	30	30
5.5	18	40	40	5.5	18	38	38
5.5	16	47	47	5.5	16	46	46
6	22	26	26	6	22	25	25
6	20	31	31	6	20	30	30
6	18	40	40	6	18	38	38
6	16	47	47	6	16	46	46

Assumes that backspan is greater than the cantilever spans.
Applicable to single, double, triple spans or greater.
Controlled by concentrated load = 30 psf
Controlled by concrete weight = 20 psf
Controlled by Deflection

STEEL CATALOG PAGE 48

22 ga Normalweight Concrete (145 pcf, F'c = 3,000 psi)									
Slab Thickness (inches)	Weight (psf)	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"
3.5	31	400	400	372	334	289	252	210	170
4	37	400	400	400	397	340	298	258	218
4.5	43	400	400	400	400	400	397	331	281
5	49	400	400	400	400	400	400	369	319
5.5	55	400	400	400	400	400	400	400	400
6	61	400	400	400	400	400	400	400	400

Slab Thickness (inches)	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"
3.5	277	156	135	121	110	96	85	80
4	224	197	175	156	139	125	113	102
4.5	273	241	213	190	170	153	138	126
5	323	286	253	226	200	182	164	148
5.5	375	331	294	262	235	211	191	173
6	400	378	336	300	269	242	218	197

20/18/16 ga Normalweight Concrete (145 pcf, F'c = 3,000 psi)									
Slab Thickness (inches)	Weight (psf)	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"
3.5	31	400	400	400	390	337	285	246	207
4	37	400	400	400	400	400	398	332	282
4.5	43	400	400	400	400	400	400	381	331
5	49	400	400	400	400	400	400	400	400
5.5	55	400	400	400	400	400	400	400	400
6	61	400	400	400	400	400	400	400	400

Slab Thickness (inches)	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"
3.5	236	181	170	151	136	122	110	100
4	274	242	215	192	172	155	140	127
4.5	335	296	263	235	215	190	172	156
5	398	362	315	280	251	226	203	186
5.5	400	400	364	325	292	263	238	216
6	400	400	400	372	334	301	272	247

Note
Due to the profile of the embossments, there is no gain in strength for the composite deck-slab when the deck gets thicker than 20 gage. However, the construction square do get longer for 18 and 16 gage deck.