





DECKING PRODUCT SUBMITTAL

PRODUCT	GRADE	GAUGE	COATING
1.5" Composite Deck	Grade 50	20 ga	G40

PRODUCT VIEW

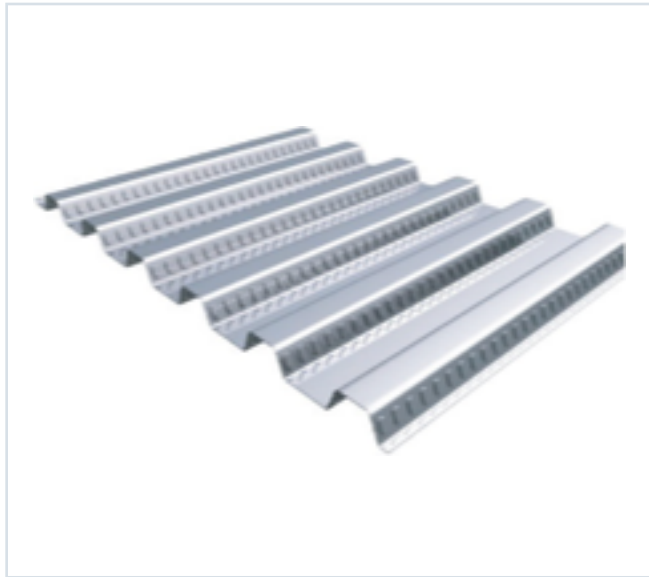

PROFILE DRAWING

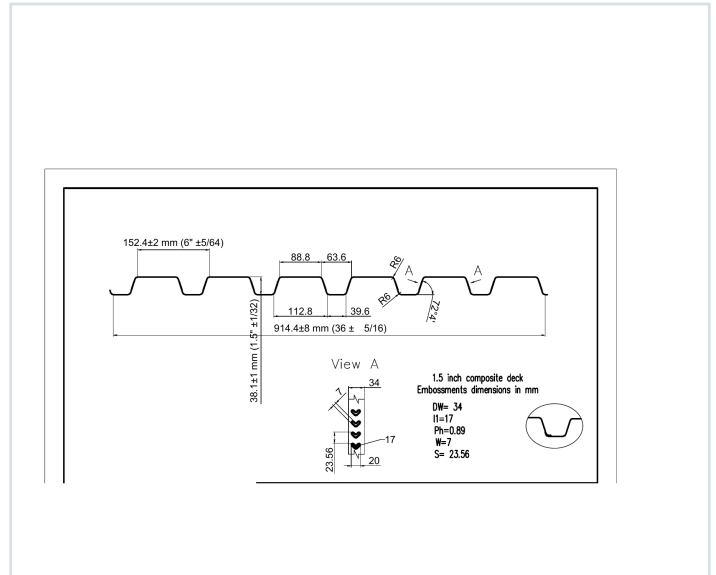

SECTION PROPERTIES · 20 GAUGE

Thickness (in.)	Weight (psf)	Fy (ksi)	S+ (in³/ft)	S- (in³/ft)	M+ (in-lb/ft)	M- (in-lb/ft)	I+ (in■/ft)	I- (in■/ft)
0.0358	2.0	50	0.216	0.222	6457	6661	0.182	0.210

SOURCE AND USE

1. Source: Refined Metal Steel Catalog 2025, published pages 45, 46, 47, 48
2. ASD section values above are the exact published row for this grade and gauge.
3. Coating selection does not change the published structural performance values.
4. Verify project-specific loading, fastening, span, concrete, and code requirements with the design professional.

PUBLISHED PERFORMANCE


15CD-FY50-20-G40 · 20 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 45

GRADE 50 STEEL



Section Properties

Gage	Design Thickness (inches)	Weight (pcf)	F _y ksi	S _x (in ³)	S _y (in ³)	ASD (S _x + 147)	I _x (in ⁴)	I _y (in ⁴)
22	0.0295	16	50	0.170	0.222	501	558	0.144
20	0.0368	20	50	0.246	0.330	697	766	0.182
18	0.0474	26	50	0.294	0.390	880	978	0.237
16	0.0598	33	50	0.378	0.507	1087	1199	0.303

Note: All section properties and ASD/bearing strengths are calculated in accordance with AISI/S10-2017, AISI S100-2012 and AISI S100-2018.

Shear and Web Crippling

Gage	V _u /Q (ksi/in)	Web Crippling (R _n /Q), lbs/in	Web Crippling (R _n /Q), lbs/in
22	2424	103	1015
20	3803	163	1536
18	5052	194	2077
16	6279	235	2505

Note: All section properties and ASD/bearing strengths are calculated in accordance with AISI/S10-2017, AISI S100-2012 and AISI S100-2018.

Allowable Uniform Downward Loads, ASD (PSF)

Span	Gage	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"
Single	22	158	12	94	80	69	60	53	47	42	38	34
Double	22	172	142	100	82	71	62	55	49	44	40	36
Triple	22	179	135	94	82	71	62	55	49	44	40	36

STEEL CATALOG PAGE 46

Span	Gage	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"
Single	22	16	12	44	35	29	22	18	15	13	11	9
Double	22	133	107	106	63	67	64	48	37	31	27	23
Triple	22	143	107	63	65	52	42	35	29	25	21	18

Note: For loads that cause L/120 Deflection, multiply by 2.0. For loads that cause L/180 Deflection, multiply by 1.5. For loads that cause L/360 Deflection, multiply by 0.667.

Construction Span Table - 20 psf Construction Load

Normal Weight Concrete (145 pcf)					Lightweight Concrete (115 pcf)				
Total Slab Depth	Deck Type	Maximum Unstayed Clear Span	1span	2span	Total Slab Depth	Deck Type	Maximum Unstayed Clear Span	1span	2span
3.50 (8'-0") 31 PSF	15x16x2 ga	7'-8"	8'-10"	9'-10"	3.50 (8'-0") 31 PSF	15x16x2 ga	8'-0"	10'-2"	10'-4"
4.00 (10'-0") 37 PSF	15x16x2 ga	9'-5"	10'-9"	11'-1"	4.00 (10'-0") 37 PSF	15x16x2 ga	10'-0"	12'-0"	12'-2"
4.50 (11'-0") 43 PSF	15x16x2 ga	10'-10"	12'-2"	12'-6"	4.50 (11'-0") 43 PSF	15x16x2 ga	11'-0"	13'-0"	13'-2"
5.00 (12'-0") 49 PSF	15x16x2 ga	12'-3"	13'-7"	14'-1"	5.00 (12'-0") 49 PSF	15x16x2 ga	12'-0"	14'-0"	14'-2"
5.50 (13'-0") 55 PSF	15x16x2 ga	13'-8"	15'-2"	15'-6"	5.50 (13'-0") 55 PSF	15x16x2 ga	13'-0"	15'-0"	15'-2"
6.00 (14'-0") 61 PSF	15x16x2 ga	15'-3"	16'-7"	17'-1"	6.00 (14'-0") 61 PSF	15x16x2 ga	14'-0"	16'-0"	16'-2"
6.50 (15'-0") 67 PSF	15x16x2 ga	16'-8"	18'-2"	18'-6"	6.50 (15'-0") 67 PSF	15x16x2 ga	15'-0"	17'-0"	17'-2"
7.00 (16'-0") 73 PSF	15x16x2 ga	18'-3"	19'-7"	20'-1"	7.00 (16'-0") 73 PSF	15x16x2 ga	16'-0"	18'-0"	18'-2"
7.50 (17'-0") 79 PSF	15x16x2 ga	19'-8"	21'-2"	21'-6"	7.50 (17'-0") 79 PSF	15x16x2 ga	17'-0"	19'-0"	19'-2"
8.00 (18'-0") 85 PSF	15x16x2 ga	21'-3"	22'-7"	23'-1"	8.00 (18'-0") 85 PSF	15x16x2 ga	18'-0"	20'-0"	20'-2"
8.50 (19'-0") 91 PSF	15x16x2 ga	22'-8"	24'-2"	24'-6"	8.50 (19'-0") 91 PSF	15x16x2 ga	19'-0"	21'-0"	21'-2"
9.00 (20'-0") 97 PSF	15x16x2 ga	24'-3"	25'-7"	26'-1"	9.00 (20'-0") 97 PSF	15x16x2 ga	20'-0"	22'-0"	22'-2"
9.50 (21'-0") 103 PSF	15x16x2 ga	25'-8"	27'-2"	27'-6"	9.50 (21'-0") 103 PSF	15x16x2 ga	21'-0"	23'-0"	23'-2"
10.00 (22'-0") 109 PSF	15x16x2 ga	27'-3"	28'-7"	29'-1"	10.00 (22'-0") 109 PSF	15x16x2 ga	22'-0"	24'-0"	24'-2"
10.50 (23'-0") 115 PSF	15x16x2 ga	28'-8"	30'-2"	30'-6"	10.50 (23'-0") 115 PSF	15x16x2 ga	23'-0"	25'-0"	25'-2"
11.00 (24'-0") 121 PSF	15x16x2 ga	30'-3"	31'-7"	32'-1"	11.00 (24'-0") 121 PSF	15x16x2 ga	24'-0"	26'-0"	26'-2"
11.50 (25'-0") 127 PSF	15x16x2 ga	31'-8"	33'-2"	33'-6"	11.50 (25'-0") 127 PSF	15x16x2 ga	25'-0"	27'-0"	27'-2"
12.00 (26'-0") 133 PSF	15x16x2 ga	33'-3"	34'-7"	35'-1"	12.00 (26'-0") 133 PSF	15x16x2 ga	26'-0"	28'-0"	28'-2"
12.50 (27'-0") 139 PSF	15x16x2 ga	34'-8"	36'-2"	36'-6"	12.50 (27'-0") 139 PSF	15x16x2 ga	27'-0"	29'-0"	29'-2"
13.00 (28'-0") 145 PSF	15x16x2 ga	36'-3"	37'-7"	38'-1"	13.00 (28'-0") 145 PSF	15x16x2 ga	28'-0"	30'-0"	30'-2"
13.50 (29'-0") 151 PSF	15x16x2 ga	37'-8"	39'-2"	39'-6"	13.50 (29'-0") 151 PSF	15x16x2 ga	29'-0"	31'-0"	31'-2"
14.00 (30'-0") 157 PSF	15x16x2 ga	39'-3"	40'-7"	41'-1"	14.00 (30'-0") 157 PSF	15x16x2 ga	30'-0"	32'-0"	32'-2"
14.50 (31'-0") 163 PSF	15x16x2 ga	40'-8"	42'-2"	42'-6"	14.50 (31'-0") 163 PSF	15x16x2 ga	31'-0"	33'-0"	33'-2"
15.00 (32'-0") 169 PSF	15x16x2 ga	42'-3"	43'-7"	44'-1"	15.00 (32'-0") 169 PSF	15x16x2 ga	32'-0"	34'-0"	34'-2"
15.50 (33'-0") 175 PSF	15x16x2 ga	43'-8"	45'-2"	45'-6"	15.50 (33'-0") 175 PSF	15x16x2 ga	33'-0"	35'-0"	35'-2"
16.00 (34'-0") 181 PSF	15x16x2 ga	45'-3"	46'-7"	47'-1"	16.00 (34'-0") 181 PSF	15x16x2 ga	34'-0"	36'-0"	36'-2"
16.50 (35'-0") 187 PSF	15x16x2 ga	46'-8"	48'-2"	48'-6"	16.50 (35'-0") 187 PSF	15x16x2 ga	35'-0"	37'-0"	37'-2"
17.00 (36'-0") 193 PSF	15x16x2 ga	48'-3"	49'-7"	50'-1"	17.00 (36'-0") 193 PSF	15x16x2 ga	36'-0"	38'-0"	38'-2"
17.50 (37'-0") 199 PSF	15x16x2 ga	49'-8"	51'-2"	51'-6"	17.50 (37'-0") 199 PSF	15x16x2 ga	37'-0"	39'-0"	39'-2"
18.00 (38'-0") 205 PSF	15x16x2 ga	51'-3"	52'-7"	53'-1"	18.00 (38'-0") 205 PSF	15x16x2 ga	38'-0"	40'-0"	40'-2"
18.50 (39'-0") 211 PSF	15x16x2 ga	52'-8"	54'-2"	54'-6"	18.50 (39'-0") 211 PSF	15x16x2 ga	39'-0"	41'-0"	41'-2"
19.00 (40'-0") 217 PSF	15x16x2 ga	54'-3"	55'-7"	56'-1"	19.00 (40'-0") 217 PSF	15x16x2 ga	40'-0"	42'-0"	42'-2"
19.50 (41'-0") 223 PSF	15x16x2 ga	55'-8"	57'-2"	57'-6"	19.50 (41'-0") 223 PSF	15x16x2 ga	41'-0"	43'-0"	43'-2"
20.00 (42'-0") 229 PSF	15x16x2 ga	57'-3"	58'-7"	59'-1"	20.00 (42'-0") 229 PSF	15x16x2 ga	42'-0"	44'-0"	44'-2"
20.50 (43'-0") 235 PSF	15x16x2 ga	58'-8"	60'-2"	60'-6"	20.50 (43'-0") 235 PSF	15x16x2 ga	43'-0"	45'-0"	45'-2"
21.00 (44'-0") 241 PSF	15x16x2 ga	60'-3"	61'-7"	62'-1"	21.00 (44'-0") 241 PSF	15x16x2 ga	44'-0"	46'-0"	46'-2"
21.50 (45'-0") 247 PSF	15x16x2 ga	61'-8"	63'-2"	63'-6"	21.50 (45'-0") 247 PSF	15x16x2 ga	45'-0"	47'-0"	47'-2"
22.00 (46'-0") 253 PSF	15x16x2 ga	63'-3"	64'-7"	65'-1"	22.00 (46'-0") 253 PSF	15x16x2 ga	46'-0"	48'-0"	48'-2"
22.50 (47'-0") 259 PSF	15x16x2 ga	64'-8"	66'-2"	66'-6"	22.50 (47'-0") 259 PSF	15x16x2 ga	47'-0"	49'-0"	49'-2"
23.00 (48'-0") 265 PSF	15x16x2 ga	66'-3"	67'-7"	68'-1"	23.00 (48'-0") 265 PSF	15x16x2 ga	48'-0"	50'-0"	50'-2"
23.50 (49'-0") 271 PSF	15x16x2 ga	67'-8"	69'-2"	69'-6"	23.50 (49'-0") 271 PSF	15x16x2 ga	49'-0"	51'-0"	51'-2"
24.00 (50'-0") 277 PSF	15x16x2 ga	69'-3"	70'-7"	71'-1"	24.00 (50'-0") 277 PSF	15x16x2 ga	50'-0"	52'-0"	52'-2"
24.50 (51'-0") 283 PSF	15x16x2 ga	70'-8"	72'-2"	72'-6"	24.50 (51'-0") 283 PSF	15x16x2 ga	51'-0"	53'-0"	53'-2"
25.00 (52'-0") 289 PSF	15x16x2 ga	72'-3"	73'-7"	74'-1"	25.00 (52'-0") 289 PSF	15x16x2 ga	52'-0"	54'-0"	54'-2"
25.50 (53'-0") 295 PSF	15x16x2 ga	73'-8"	75'-2"	75'-6"	25.50 (53'-0") 295 PSF	15x16x2 ga	53'-0"	55'-0"	55'-2"
26.00 (54'-0") 301 PSF	15x16x2 ga	75'-3"	76'-7"	77'-1"	26.00 (54'-0") 301 PSF	15x16x2 ga	54'-0"	56'-0"	56'-2"
26.50 (55'-0") 307 PSF	15x16x2 ga	76'-8"	78'-2"	78'-6"	26.50 (55'-0") 307 PSF	15x16x2 ga	55'-0"	57'-0"	57'-2"
27.00 (56'-0") 313 PSF	15x16x2 ga	78'-3"	79'-7"	80'-1"	27.00 (56'-0") 313 PSF	15x16x2 ga	56'-0"	58'-0"	58'-2"
27.50 (57'-0") 319 PSF	15x16x2 ga	79'-8"	81'-2"	81'-6"	27.50 (57'-0") 319 PSF	15x16x2 ga	57'-0"	59'-0"	59'-2"
28.00 (58'-0") 325 PSF	15x16x2 ga	81'-3"	82'-7"	83'-1"	28.00 (58'-0") 325 PSF	15x16x2 ga	58'-0"	60'-0"	60'-2"
28.50 (59'-0") 331 PSF	15x16x2 ga	82'-8"	84'-2"	84'-6"	28.50 (59'-0") 331 PSF	15x16x2 ga	59'-0"	61'-0"	61'-2"
29.00 (60'-0") 337 PSF	15x16x2 ga	84'-3"	85'-7"	86'-1"	29.00 (60'-0") 337 PSF	15x16x2 ga	60'-0"	62'-0"	62'-2"
29.50 (61'-0") 343 PSF	15x16x2 ga	85'-8"	87'-2"	87'-6"	29.50 (61'-0") 343 PSF	15x16x2 ga	61'-0"	63'-0"	63'-2"
30.00 (62'-0") 349 PSF	15x16x2 ga	87'-3"	88'-7"	89'-1"	30.00 (62'-0") 349 PSF	15x16x2 ga	62'-0"	64'-0"	64'-2"
30.50 (63'-0") 355 PSF	15x16x2 ga	88'-8"	90'-2"	90'-6"	30.50 (63'-0") 355 PSF	15x16x2 ga	63'-0"	65'-0"	65'-2"
31.00 (64'-0") 361 PSF	15x16x2 ga	90'-3"	91'-7"	92'-1"	31.00 (64'-0") 361 PSF	15x16x2 ga	64'-0"	66'-0"	66'-2"
31.50 (65'-0") 367 PSF	15x16x2 ga	91'-8"	93'-2"	93'-6"	31.50 (65'-0") 367 PSF	15x16x2 ga	65'-0"	67'-0"	67'-2"
32.00 (66'-0") 373 PSF	15x16x2 ga	93'-3"	94'-7"	95'-1"	32.00 (66'-0") 373 PSF	15x16x2 ga	66'-0"	68'-0"	68'-2"
32.50 (67'-0") 379 PSF	15x16x2 ga	94'-8"	96'-2"	96'-6"	32.50 (67'-0") 379 PSF	15x16x2 ga	67'-0"	69'-0"	69'-2"
33.00 (68'-0") 385 PSF	15x16x2 ga	96'-3"	97'-7"	98'-1"	33.00 (68'-0") 385 PSF	15x16x2 ga	68'-0"	70'-0"	70'-2"
33.50 (69'-0") 391 PSF	15x16x2 ga	97'-8"	99'-2"	99'-6"	33.50 (69'-0") 391 PSF	15x16x2 ga	69'-0"	71'-0"	71'-2"
34.00 (70'-0") 397 PSF	15x16x2 ga	99'-3"	100'-7"	101'-1"	34.00 (70'-0") 397 PSF	15x16x2 ga	70'-0"	72'-0"	72'-2"
34.50 (71'-0") 403 PSF	15x16x2 ga	100'-8"	102'-2"	102'-6"	34.50 (71'-0") 403 PSF	15x16x2 ga	71'-0"	73'-0"	73'-2"
35.00 (72'-0") 409 PSF	15x16x2 ga	102'-3"	103'-7"	104'-1"	35.00 (72'-0") 409 PSF	15x16x2 ga	72'-0"	74'-0"	74'-2"
35.50 (73'-0") 415 PSF	15x16x2 ga	103'-8"	105'-2"	105'-6"	35.50 (73'-0") 415 PSF	15x16x2 ga	73'-0"	75'-0"	75'-2"
36.00 (74'-0") 421 PSF	15x16x2 ga	105'-3"	106'-7"	107'-1"	36.00 (74'-0") 421 PSF	15x16x2 ga	74'-0"	76'-0"	76'-2"
36.50 (75'-0") 427 PSF	15x16x2 ga	106'-8"	108'-2"	108'-6"	36.50 (75'-0") 427 PSF	15x16x2 ga	75'-0"	77'-0"	77'-2"
37.00 (76'-0") 433 PSF	15x16x2 ga	108'-3"	109'-7"	110'-1"	37.00 (76'-0") 433 PSF	15x16x2 ga	76'-0"	78'-0"	78'-2"
37.50 (77'-0") 439 PSF	15x16x2 ga	109'-8"	111'-2"	111'-6"	37.50 (77'-0") 439 PSF	15x16x2 ga	77'-0"	79'-0"	79'-2"
38.00 (78'-0") 445 PSF	15x16x2 ga	111'-3"	112'-7"	113'-1"	38.00 (78'-0") 445 PSF	15x16x2 ga	78'-0"	80'-0"	80'-2"
38.50 (79'-0") 451 PSF	15x16x2 ga	112'-8"	114'-2"	114'-6"	38.50 (79'-0") 451 PSF	15x16x2 ga	79'-0"	81'-0"	81'-2"
39.00 (80'-0") 457 PSF	15x16x2 ga	114'-3"	115'-7"	116'-1"	39.00 (80'-0") 457 PSF	15x16x2 ga	80'-0"	82'-0"	82'-2"
39.50 (81'-0") 463 PSF	15x16x2 ga	115'-8"	117'-2"	117'-6"	39.50 (81'-0") 463 PSF	15x16x2 ga	81'-0"	83'-0"	83'-2"
40.00 (82'-0") 469 PSF	15x16x2 ga	117'-3"	118'-7"	119'-1"	40.00 (82'-0") 469 PSF	15x16x2 ga	82'-0"	84'-0"	84'-2"
40.50 (83'-0") 475 PSF	15x16x2 ga	118'-8"	120'-2"	120'-6"	40.50 (83'-0") 475 PSF	15x16x2 ga	83'-0"	85'-0"	85'-2"
41.00 (84'-0") 481 PSF	15x16x2 ga	120'-3"	121'-7"	122'-1"	41.00 (84'-0") 481 PSF	15x16x2 ga	84'-0"	86'-0"	86'-2"
41.50 (85'-0") 487 PSF	15x16x2 ga	121'-8"	123'-2"	123'-6"	41.50 (85'-0") 487 PSF	15x16x2 ga	85'-0"	87'-0"	87'-2"
42.00 (86'-0") 493 PSF	15x16x2 ga	123'-3"	124'-7"	125'-1"	42.00 (86'-0") 493 PSF	15x16x2 ga	86'-0"	88'-0"	88'-2"
42.50 (87'-0") 499 PSF	15x16x2 ga	124'-8"	126'-2"	126'-6"	42.50 (87'-0") 499 PSF	15x16x2 ga	87'-0"	89'-0"	89'-2"
43.00 (88'-0") 505 PSF	15x16x2 ga	126'-3"	127'-7"	128'-1"	43.00 (88'-0") 505 PSF	15x16x2 ga	88'-0"	90'-0"	90'-2"
43.50 (89'-0") 511 PSF	15x16x2 ga	127'-8"	129'-2"	129'-6"	43.50 (89'-0") 511 PSF	15x16x2 ga	89'-0"	91'-0"	91'-2"
44.00 (90'-0") 517 PSF	15x16x2 ga	129'-3"	130'-7"	131'-1"	44.00 (90'-0") 517 PSF	15x16x2 ga	90'-0"	92'-0"	92'-2"
44.50 (91'-0") 523 PSF	15x16x2 ga	130'-8"	132'-2"	132'-6"	44.50 (91'-0") 523 PSF	15x16x2 ga	91'-0"	93'-0"	93'-2"
45.00 (92'-0") 529 PSF	15x16x2 ga	132'-3"	133'-7"	134'-1"	45.00 (92'-0") 529 PSF	15x16x2 ga	92'-0"	94'-0"	94'-2"
45.50 (93'-0") 535 PSF	15x16x2 ga	133'-8"	135'-2"	135'-6"	45.50 (93'-0") 535 PSF	15x16x2 ga	93'-0"	95'-0"	95'-2"
46.00 (94'-0") 541 PSF	15x16x2 ga	135'-3"	136'-7"	137'-1"	46.00 (94'-0") 541 PSF	15x16x2 ga	94'-0"	96'-0"	96'-2"
46.50 (95'-0") 547 PSF	15x16x2 ga	136'-8"	138'-2"	138'-6"	46.50 (95'-0") 547 PSF	15x16x2 ga	95'-0"	97'-0"	97'-2"
47.00 (96'-0") 553 PSF	15x16x2 ga	138'-3"	139'-7"	140'-1"	47.00 (96'-0") 553 PSF	15x16x2 ga	96'-0"	98'-0"	98'-2"
47.50 (97'-0") 559 PSF	15x16x2 ga	139'-8"	141'-2"	141'-6"	47.50 (97'-0") 559 PSF	15x16x2 ga	97'-0"	99'-0"	99'-2"
48.00 (98'-0") 565 PSF	15x16x2 ga	141'-3"	142'-7"	143'-1"	48.00 (98'-0") 565 PSF	15x16x2 ga	98'-0"	100'-0"	100'-2"
48.50 (99'-0") 571 PSF	15x16x2 ga	142'-8"	144'-2"	144'-6"	48.50 (99'-0") 571 PSF	15x16x2 ga	99'-0"	101'-0"	101'-2"
49.00 (100'-0") 577 PSF	15x16x2 ga	144'-3"	145'-7"	146'-1"	49.00 (100'-0") 577 PSF	15x16x2 ga	100'-0"	102'-0"	102'-2"
49.50 (101'-0") 583 PSF	15x16x2 ga	145'-8"	147'-2"	147'-6"	49.50 (101'-0") 583 PSF	15x16x2 ga	101'-0"	103'-0"	103'-2"
50.00 (102'-0") 589 PSF	15x16x2 ga	147'-3"	148'-7"	149'-1"	50.00 (102'-0") 589 PSF	15x16x2 ga	102'-0"	104'-0"	104'-2"
50.50 (103'-0") 595 PSF	15x16x2 ga	148'-8"	150'-2"	150'-6"	50.50 (103'-0") 595 PSF	15x16x2 ga	103'-0"	105'-0"	105'-2"
51.00 (104'-0") 601 PSF	15								

PUBLISHED PERFORMANCE DATA

15CD-FY50-20-G40 · 20 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 47

LSC Deck - Wide Flange Up				ISNV Deck - Wide Flange Down			
50 ksi				50 ksi			
Live Load	20	psf	with concrete	Live Load	20	psf	with concrete
DL	160	psf		DL	160	psf	
Deck Weight	2	psf		Deck Weight	2	psf	
Live Load	50	psf	without concrete	Live Load	50	psf	without concrete
Total Slab Thickness	Deck Gauge	Maximum Cantilever (inches) NWC	Maximum Cantilever (inches) LWC	Total Slab Thickness	Deck Gauge	Maximum Cantilever (inches) NWC	Maximum Cantilever (inches) LWC
3.5	22	36	36	3.5	22	25	25
3.5	20	31	31	3.5	20	30	30
3.5	18	40	40	3.5	18	38	38
3.5	16	47	47	3.5	16	46	46
4	22	36	36	4	22	25	25
4	20	31	31	4	20	30	30
4	18	40	40	4	18	38	38
4	16	47	47	4	16	46	46
4.5	22	36	36	4.5	22	25	25
4.5	20	31	31	4.5	20	30	30
4.5	18	40	40	4.5	18	38	38
4.5	16	47	47	4.5	16	46	46
5	22	36	36	5	22	25	25
5	20	31	31	5	20	30	30
5	18	40	40	5	18	38	38
5	16	47	47	5	16	46	46
5.5	22	36	36	5.5	22	25	25
5.5	20	31	31	5.5	20	30	30
5.5	18	40	40	5.5	18	38	38
5.5	16	47	47	5.5	16	46	46
6	22	36	36	6	22	25	25
6	20	31	31	6	20	30	30
6	18	40	40	6	18	38	38
6	16	47	47	6	16	46	46

— Assumes that backspan is greater than the cantilever spans.
— Applicable to single, double, triple spans or greater.
— Controlled by concentrated load = 30 psf.
— Controlled by concrete weight = 30 psf.
— Controlled by Deflection.

STEEL CATALOG PAGE 48

22 ga Normalweight Concrete (145 pcf, F'c = 3,000 psi)									
Slab Thickness (inches)	Weight (psf)	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"
3.5	31	400	400	372	334	289	252	210	170
4	37	400	400	400	397	340	298	258	218
4.5	43	400	400	400	400	400	397	331	281
5	49	400	400	400	400	400	400	369	319
5.5	55	400	400	400	400	400	400	400	400
6	61	400	400	400	400	400	400	400	400

Slab Thickness (inches)	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"
3.5	177	156	135	121	110	96	85	80
4	224	197	175	156	139	125	113	102
4.5	273	241	213	190	170	153	138	126
5	323	286	253	226	200	182	164	149
5.5	375	331	294	262	235	211	191	173
6	400	378	336	300	269	242	218	197

20/18/16 ga Normalweight Concrete (145 pcf, F'c = 3,000 psi)									
Slab Thickness (inches)	Weight (psf)	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"
3.5	31	400	400	400	400	400	400	400	400
4	37	400	400	400	400	400	400	400	400
4.5	43	400	400	400	400	400	400	400	400
5	49	400	400	400	400	400	400	400	400
5.5	55	400	400	400	400	400	400	400	400
6	61	400	400	400	400	400	400	400	400

Slab Thickness (inches)	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"
3.5	236	181	170	151	136	122	110	100
4	274	242	215	192	172	155	140	127
4.5	315	276	253	226	201	182	164	149
5	368	321	313	280	251	226	203	186
5.5	400	400	364	335	292	263	238	216
6	400	400	400	372	334	301	272	247

Note
Due to the profile of the embossments, there is no gain in strength for the composite deck-slab when the deck gets thicker than 20 gauge. However, the construction square do get longer for 18 and 16 gauge deck.