


DECKING PRODUCT SUBMITTAL


2CD-FY50-22-G60

PRODUCT	GRADE	GAUGE	COATING
2" Composite Deck	Grade 50	22 ga	G60

PRODUCT VIEW

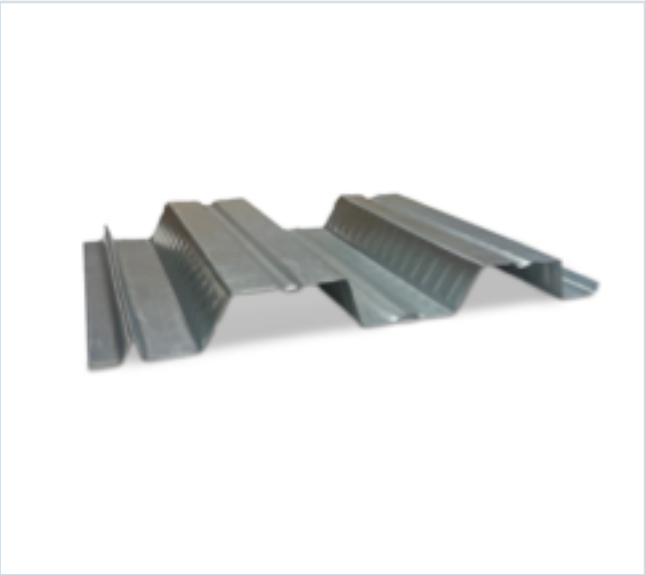

PROFILE DRAWING

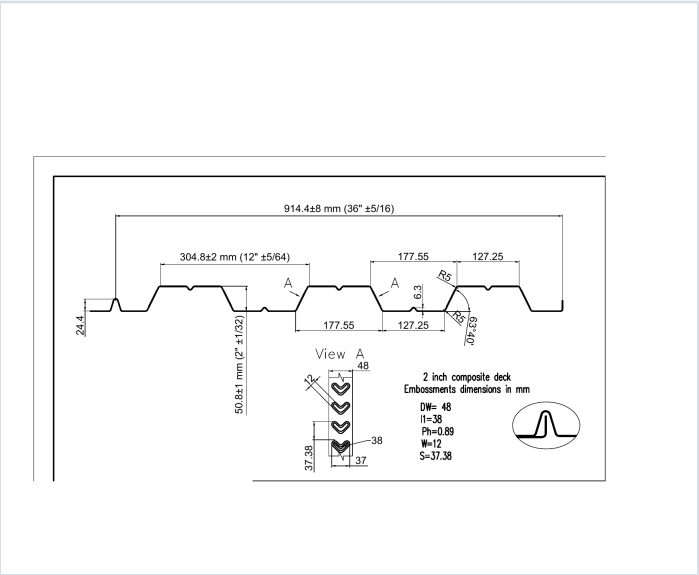

SECTION PROPERTIES · 22 GAUGE

Thickness (in.)	Weight (psf)	Fy (ksi)	S+ (in ³ /ft)	S- (in ³ /ft)	M+ (in-lb/ft)	M- (in-lb/ft)	I+ (in ⁴ /ft)	I- (in ⁴ /ft)
0.0295	1.6	50	0.247	0.254	7407	7595	0.311	0.290

SOURCE AND USE

1. Source: Refined Metal Steel Catalog 2025, published pages 54, 55, 56, 57, 58, 59, 60, 61
2. ASD section values above are the exact published row for this grade and gauge.
3. Coating selection does not change the published structural performance values.
4. Verify project-specific loading, fastening, span, concrete, and code requirements with the design professional.

PUBLISHED PERFORMANCE DATA


2CD-FY50-22-G60 · 22 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 54

GRADE 50 STEEL



Section Properties

Gage	Design Thickness (inches)	Weight (pcf)	E ksi	S _x (inch ³ per foot)	S _y (inch ³ per foot)	ASD (E _x + 16E _y)		I _x (inch ⁴ per ft.	I _y (inch ⁴ per ft.
						M _x / ft. per ft.	M _y / ft. per ft.		
22	0.0295	16	50	0.247	0.254	7407	7595	0.381	0.290
20	0.0358	19	50	0.329	0.336	9860	10000	0.393	0.373
18	0.0474	2.5	50	0.493	0.500	14760	14960	0.548	0.530
16	0.0598	3.2	50	0.645	0.644	19321	19271	0.703	0.683

Note: All section properties and ASD flexural strengths are calculated in accordance with ANSI/AISC 360-10T, AISC 360-10T and AISC 360-10T.

Shear and Web Crippling

Gage	V _u (kips)	Web Crippling (R _v /3), kips		Web Crippling (R _v /3), kips	
		End Bearing	Interior Bearing	End Bearing	Interior Bearing
22	388	434	476	529	627
20	278	290	297	749	904
18	365	886	1123	1259	1532
16	460	1507	1707	1875	2307

Note: All section properties and ASD flexural strengths are calculated in accordance with ANSI/AISC 360-10T, AISC 360-10T and AISC 360-10T.

STEEL CATALOG PAGE 55

Span	Gage	6'	7'	8'	9'	10'	11'	12'	13'	14'	15'	16'
Single	22	137	133	77	61	49	41	34	29	25	22	19
	20	181	134	103	81	66	54	44	39	34	29	26
	18	273	203	154	121	99	81	68	58	50	44	38
	16	358	263	203	159	129	106	89	76	66	57	50
Double	22	131	113	79	63	51	42	35	30	26	23	20
	20	196	137	105	83	67	55	47	40	34	30	26
	18	277	204	156	123	100	82	69	59	51	44	39
	16	357	262	203	159	129	106	89	76	66	57	50
Triple	22	176	129	99	78	63	52	44	37	32	28	25
	20	223	171	137	108	84	69	58	50	43	37	33
	18	346	254	195	154	125	103	87	74	64	55	49
	16	446	338	251	198	161	133	112	95	82	71	63

Note: 1. All section properties and ASD (E_x + 16E_y) uniform loads are calculated in accordance with ANSI/AISC 360-10T, AISC 360-10T and AISC 360-10T.
2. Loads shown in tables are uniformly distributed superimposed loads in psf. Span lengths include center-to-center spacing of supports. Tabulated loads shall not be increased by assuming clear span dimensions.
3. Bending Moment formula used for flexural stress limitations are: Single and Two Span: $M = \frac{wL^2}{8}$; Three Span: $M = \frac{wL^2}{10}$.

Web crippling and shear have not been accounted for in these tables. Required bearing should be determined based on specific span conditions.

Uniform Superimposed Service Load that Causes L/240 Deflection (PSF)

Span	Gage	6'	7'	8'	9'	10'	11'	12'	13'	14'	15'	16'
Single	22	13	13	7	5	4	3	2	1	1	1	1
	20	13	13	7	5	4	3	2	1	1	1	1
	18	13	13	7	5	4	3	2	1	1	1	1
	16	13	13	7	5	4	3	2	1	1	1	1
Double	22	212	134	90	63	46	34	27	21	17	14	11
	20	212	134	90	63	46	34	27	21	17	14	11
	18	309	244	164	115	84	63	48	38	31	25	20
	16	397	303	216	150	110	82	63	50	40	32	27
Triple	22	206	135	75	49	35	27	21	16	13	11	9
	20	214	136	90	63	46	35	27	21	17	14	11
	18	304	191	128	90	66	49	38	30	24	19	16
	16	397	262	168	118	86	64	50	39	31	25	21

Note: For loads that cause L/120 Deflection, multiply by 2.0. For loads that cause L/180 Deflection, multiply by 1.5. For loads that cause L/360 Deflection, multiply by 0.667.

PUBLISHED PERFORMANCE DATA

2CD-FY50-22-G60 · 22 GAUGE

OFFICIAL STEEL CATALOG EXCERPTS

Selected product row is reproduced on Page 1; excerpts retain published table context and notes.

STEEL CATALOG PAGE 56

Normal Weight Concrete (145 pcf)				Lightweight Concrete (115 pcf)			
Maximum Unshored Clear Span				Maximum Unshored Clear Span			
400 (#200) 39 PSF	2x12x22 ga	7'-8"	9'-1"	9'-3"	2x12x22 ga	8'-6"	9'-9"
	2x12x20 ga	9'-3"	10'-6"	10'-10"	2x12x20 ga	10'-0"	11'-3"
	2x12x18 ga	10'-5"	12'-9"	12'-5"	2x12x18 ga	11'-2"	13'-9"
	2x12x16 ga	11'-4"	14'-2"	13'-4"	2x12x16 ga	12'-0"	14'-8"
450 (#250) 45 PSF	2x12x22 ga	7'-7"	8'-8"	8'-10"	2x12x22 ga	8'-3"	9'-5"
	2x12x20 ga	8'-10"	10'-0"	10'-4"	2x12x20 ga	9'-7"	10'-10"
	2x12x18 ga	9'-11"	12'-2"	12'-0"	2x12x18 ga	10'-9"	13'-3"
	2x12x16 ga	10'-11"	13'-8"	12'-10"	2x12x16 ga	11'-8"	14'-6"
500 (#300) 51 PSF	2x12x22 ga	7'-3"	8'-4"	8'-6"	2x12x22 ga	7'-8"	9'-1"
	2x12x20 ga	8'-6"	9'-7"	9'-11"	2x12x20 ga	9'-3"	10'-6"
	2x12x18 ga	9'-7"	11'-8"	11'-8"	2x12x18 ga	10'-5"	12'-9"
	2x12x16 ga	10'-6"	13'-3"	12'-6"	2x12x16 ga	11'-4"	14'-2"
550 (#350) 57 PSF	2x12x22 ga	6'-11"	8'-0"	8'-2"	2x12x22 ga	7'-7"	8'-9"
	2x12x20 ga	8'-3"	9'-3"	9'-6"	2x12x20 ga	8'-11"	10'-1"
	2x12x18 ga	9'-3"	11'-3"	11'-4"	2x12x18 ga	10'-0"	12'-4"
	2x12x16 ga	10'-1"	12'-9"	12'-2"	2x12x16 ga	11'-0"	13'-11"
600 (#400) 63 PSF	2x12x22 ga	6'-9"	7'-9"	7'-10"	2x12x22 ga	7'-5"	8'-6"
	2x12x20 ga	7'-8"	8'-11"	9'-2"	2x12x20 ga	8'-8"	9'-9"
	2x12x18 ga	8'-11"	10'-10"	11'-0"	2x12x18 ga	9'-9"	11'-10"
	2x12x16 ga	9'-9"	12'-4"	11'-10"	2x12x16 ga	10'-8"	13'-6"
650 (#450) 69 PSF	2x12x22 ga	6'-8"	7'-6"	7'-7"	2x12x22 ga	7'-2"	8'-3"
	2x12x20 ga	7'-9"	8'-7"	8'-10"	2x12x20 ga	8'-5"	9'-5"
	2x12x18 ga	8'-8"	10'-6"	10'-9"	2x12x18 ga	9'-5"	11'-6"
	2x12x16 ga	9'-6"	11'-8"	11'-7"	2x12x16 ga	10'-4"	12'-4"

Note
With crippling and clear span not shown accounted for in these tables. Required bearing should be determined based on specific span conditions.

STEEL CATALOG PAGE 61

Slab Thickness (Inches)	Weight (pcf)	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"
4	31	400	400	375	330	290	260	230
4.5	35	400	400	400	400	395	397	384
5	39	400	400	400	400	400	370	337
5.5	44	400	400	400	400	400	400	393
6	48	400	400	400	400	400	400	400
6.5	53	400	400	400	400	400	400	400

Slab Thickness (Inches)	10'-6"	11'-0"	11'-6"	12'-0"	12'-6"	13'-0"	13'-6"	14'-0"
4	290	280	272	257	243	230	220	210
4.5	296	298	290	280	276	260	247	238
5	304	295	290	277	268	255	240	230
5.5	304	300	291	285	272	255	240	230
6	307	307	304	304	298	285	270	260
6.5	307	307	304	304	304	298	285	270

16 ga Lightweight Concrete (115 pcf, F_c = 3,000 psi)

Slab Thickness (Inches)	Weight (pcf)	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"
4	31	400	400	400	400	392	323	290
4.5	35	400	400	400	400	400	390	360
5	39	400	400	400	400	400	400	400
5.5	44	400	400	400	400	400	400	400
6	48	400	400	400	400	400	400	400
6.5	53	400	400	400	400	400	400	400

Slab Thickness (Inches)	10'-6"	11'-0"	11'-6"	12'-0"	12'-6"	13'-0"	13'-6"	14'-0"
4	260	256	250	236	220	204	190	180
4.5	267	267	261	246	230	214	200	190
5	277	277	271	256	240	224	210	200
5.5	284	284	278	263	246	230	216	206
6	290	290	284	269	252	236	222	212
6.5	290	290	284	269	252	236	222	212