AF35

PROFILE
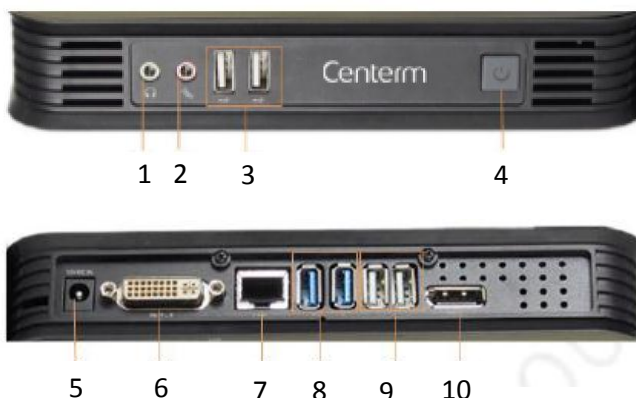
Compact and versatile, Centerm AF35 offers you PC-like experiences with wide support of Citrix ICA/HDX, VMware PCoIP and Microsoft RDP.

FEATURES

➢ Adopting AMD G-series FT3 SOC APU

➢ Support Full HD 1080P

➢ Support DirectX 11.1 3D acceleration, UVD 4.2 hardware decoding

➢ Support 3G/4G module with RS232 COM Port

➢ Support fiber optic Ethernet or POE Ethernet

➢ Wireless Supported with MINI-PCIE design

➢ Low Power Consumption

➢ Fan-less Cooling

Connectivity

1. Line-out
2. Mic-in
3. USB2.0 Ports
4. Power Button
5. DC 12V Input
6. DVI-I Port
7. RJ-45
8. USB 3.0 Ports
9. USB 2.0 Ports
10. DP port

SPECIFICATION

SYSTEM

Processor	AMD Quad-core 1.5 GHz
Available Operating System	Linux Ubuntu, Windows XP/7/8/10
VDI/HSD Support	Citrix Receiver HDX/ICA, VMware view PCOIP, RDP/ RemoteFX, SPICE

MEMORY

RAM (DDR3)	1 GB (Max up to 8GB)
Storage (SSD)	8 GB (Max up to 128GB)

DISPLAY

Port	DVI-I x 1 DP++ x 1
Resolution	VGA / DVI-D mode: Up to 1920x1200 DP++ mode: Up to 2560x1600

Network

LAN	x1 (10/100/1000 Base-T Fast Ethernet, RJ-45)
WLAN 3G	- (Optional) Built-in USB 802.11 b /g /n wireless module - (Optional) GSM 850/1900 WCDMA 850/1900

I/O PERIPHERAL INTERFACE

USB Ports	x 6 (USB 3.0 x 2, USB 2.0 x 4)
RJ-45	x 1

AUDIO

Ports	front : Line-out x 1, Mic-in x 1 (1/8-inch mini, full 16-bit stereo)

DIMENSION

Device	196mm x 144mm x 35mm
Net Weight	0.8kg

Power

Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 12V/3A DC
Power Consumption	Running: 9w, Max: 15w, Standby: <3w

Installation

Mounting	Horizontal Feet
	VESA Mounting supported

ENVIRONMENT

Cooling	Fan-less Convection
Temperature	Operation: 0℃~50℃; Storage: -20℃ ~ 70℃
Relative Humidity	5% to 95% non-condensing