C92 (Quad Core)

PROFILE

Powered by Intel Quad-core CPU, Centerm C92 is designed to support CPU-intensive and graphic demanding applications delivering smooth and outstanding performance in the standalone and virtual desktop environment.
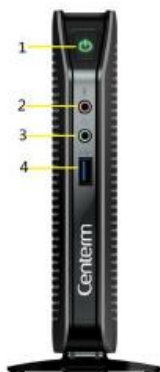
FEATURES

➢ **Powerful SoC performance**
New generation Intel quad-core CPU drives up to superior digital media performance and rich HD entertainment.

➢ **Low TCO Solution**
Low price, low power consumption and centralized management greatly reduces TCO.

➢ **Dual display supported**

➢ **Multiple VDI protocol supported**
Widely supports Citrix ICA/HDX, VMware PCoIP and Microsoft RDP.

➢ **Environment friendly**
Low CO2 emission, low heat emission, noise-free and space saving.

Connectivity

1. Power Button
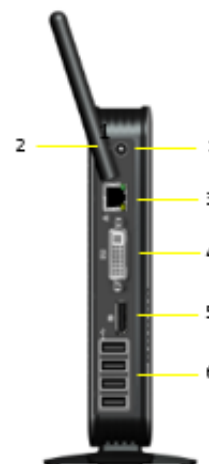
2. Mic-in

3. Line-out

4. DVI-I Port

Front Side

1. DC 12v input

2. USB 2.0 Port

3. RJ-45

4. DVI-I Port

5. DP Port

6. USB 2.0 Ports

Rear Side（without wifi）

1. DC 12v input

2. Wifi Antena

3. RJ-45

4. DVI-I Port

5. DP Port

6. USB 2.0 Ports

Rear Side（with wifi）

SPECIFICATION

SYSTEM

Processor	Intel Quad-Core 2.0GHz
Available Operating System	WES7 / WES8 / COS ①
VDI/HSD Support	Citrix Receiver / VMware view / Microsoft RDP 8 Compatible
Management	CCCM

MEMORY

RAM (DDR3)	2GB (Max up to 8GB)
Storage (SSD)	8GB (up to 128GB SSD)

DISPLAY

Port	DVI-I x 1 (DVI-to-VGA adapter included) , DP x 1
Resolution	DVI-D Up to 1920x1200 @ 60Hz, VGA / DP Up to 2560x1600 @ 60Hz
Color Depth	Up to 32bits true color
Dual Display	Supported

Network

LAN	x1 (10/100/1000 Base-T Fast Ethernet, RJ-45)
WLAN	- optional WIFI (has only 4 USB2.0 ports at the rear in such a case)

I/O PERIPHERAL INTERFACE

USB 2.0	Rear: 5 x USB 2.0 (No Wifi), 4 x USB 2.0 (With Wifi)
	Front: 1 x USB 3.0

AUDIO

Ports	Front: Line-out x 1 , Mic-in x 1, (1/8-inch mini jack)

DIMENSION

Device (H x W x D)	131mm x 31.5mm x 167mm
Packaging	488mm x 256mm x 108mm
Net Weight	0.55 kg

Power

Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 12V/3A DC
Power Consumption	< 10w

Mounting

VESA Bracket	VESA Mounting Kit
Kensington Lock	Built-in Kensington security slot

ENVIRONMENT

Cooling	Fan-less Convection
Operation Temperature	0℃ to 40℃
Relative Humidity	30% to 90% non-condensing

①: Centerm Operating System (Linux) .

Centerm Information Co. , Ltd (China)

Add: 2F,#22 Star-net Science Plaza,Juyuanzhou,#618 Jinshan Road, Fuzhou, Fujian, China 350002
Tel: +86-591-28053888 ext 8757

Centerm Information APAC (Singapore)

Add: 18 Kaki Bukit Road 3,Entrepreneur Business Centre, # 04-12, Singapore 415978
Tel: +65 9015 1946

Website: www.centerm.com   E-mail: ctsales@centerm.com