

# AF30

## PROFILE


Compact and versatile, Centerm AF30 offers you PC-like experiences with wide support of Citrix ICA/HDX, VMware PCoIP and Microsoft RDP.

## FEATURES

- Adopting AMD G-series FT3 SOC APU
- Support Full HD 1080P
- Support DirectX 11.1 3D acceleration, UVD 4.2 hardware decoding
- Wireless Supported with MINI-PCIE design
- Low Power Consumption
- Fan-less Cooling



### Connectivity

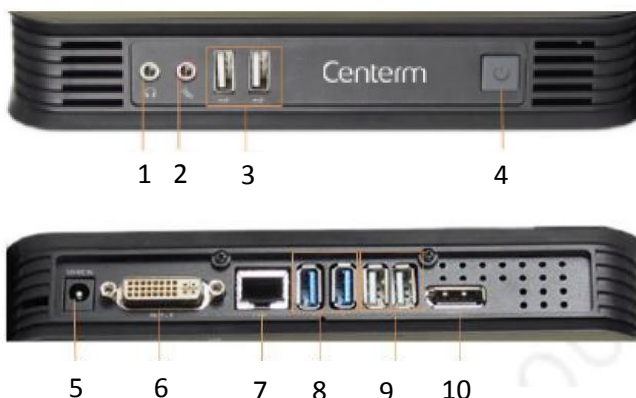

1. Line-out
2. Mic-in
3. USB2.0 Ports
4. Power Button
5. DC 12V Input
6. DVI-I Port
7. RJ-45
8. USB 3.0 Ports
9. USB 2.0 Ports
10. DP port

## SPECIFICATION

### SYSTEM

|                            |   |
|----------------------------|---|
| Processor                  | AMD Dual-core 1.0 GHz   |
| Available Operating System | Linux Ubuntu, Windows XP/7/8/10                                 |
| VDI/HSD Support            | Citrix Receiver HDX/ICA, VMware view PCOIP, RDP/RemoteFX, SPICE |

### MEMORY

|               |                        |
|---------------|------------------------|
| RAM (DDR3)    | 1 GB (Max up to 8GB )  |
| Storage (SSD) | 8 GB (Max up to 128GB) |

### DISPLAY

|            |   |
|------------|---|
| Port       | DVI-I x 1<br>DP++ x 1   |
| Resolution | VGA / DVI-D mode: Up to 1920x1200<br>DP++ mode: Up to 2560x1600 |

### Network

|      |   |
|------|---|
| LAN  | x1 (10/100/1000 Base-T Fast Ethernet, RJ-45)              |
| WLAN | - (Optional) Built-in USB 802.11 b /g /n wireless module, |

### I/O PERIPHERAL INTERFACE

|           |                                |
|-----------|--------------------------------|
| USB Ports | x 6 (USB 3.0 x 2, USB 2.0 x 4) |
| RJ-45     | x 1                            |

### AUDIO

|       |  |
|-------|--|
| Ports | front : Line-out x 1, Mic-in x 1 (1/8-inch mini, full 16-bit stereo) |
|-------|--|

### DIMENSION

|            |                      |
|------------|----------------------|
| Device     | 196mm x 144mm x 35mm |
| Net Weight | 0.8kg                |

### Power

|                   |   |
|-------------------|---|
| Adapter           | Worldwide auto-sensing 100-240V AC, 50/60 Hz, 12V/3A DC |
| Power Consumption | Running: 9w, Max: 15w, Standby: <3w                     |

### Installation

|          |                         |
|----------|-------------------------|
| Mounting | Vertical Feet           |
|          | VESA Mounting supported |

### ENVIRONMENT

|                   |  |
|-------------------|--|
| Cooling           | Fan-less Convection                        |
| Temperature       | Operation: 0°C~50°C; Storage: -20°C ~ 70°C |
| Relative Humidity | 5% to 95% non-condensing                   |

#### Centerm Information Co. , Ltd (China)

Add: 2F,#22 Star-net Scient Plaza,Juyuanzhou,#618 Jinshan Road,  
Fuzhou, Fujian, China 350002 Tel: +86-591-28053888 ext 8757

#### Centerm Information APAC (Singapore)

Add: 18 Kaki Bukit Road 3,Entrepreneur Business Centre, # 04-12,  
Singapore 415978 Tel:+65 9015 1946