GEp-4 Reboot Feasibility Study

Data anchors, present assessment, and critical-path questions

Edward J. Brash

Christopher Newport University and Jefferson Lab

4 November 2026

Working configuration: 10.7 GeV beam, 75 μA, 30 cm LH_2, positive-polarity HMS proton arm, and NPS electron arm near 3 m.

What we set out to establish

Physics reach

Does the HMS–NPS configuration provide enough accepted elastic events at $Q^2 \simeq 11\ \mathrm{GeV}^2$ for a competitive form-factor measurement?

NPS response and backgrounds

Can a high NPS threshold retain elastic efficiency while controlling electron, photon, and charged-hadron backgrounds?

Trigger and DAQ


What are the real HMS and NPS singles rates, the accidental-coincidence rate, and the required Hall C DAQ capability?

Experimental design

Are the NPS distance, FPP configuration, HMS trigger logic, and coincidence timing mutually compatible?

Approach: anchor SIMC and GEANT4 to real Hall C data before extrapolating.

Elastic yield: a close HMS benchmark supports the proposal

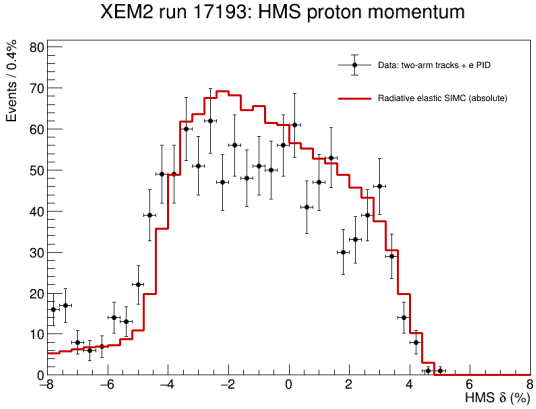

XEM2 run 17193: HMS $+6.476$ GeV/c at 19.52°; proposed HMS $+6.735$ GeV/c at 18.80°.


- Broad HMS acceptance: data/SIMC $= 0.936$.
- Tight elastic selection: $800/1034.34 = 0.7734$.
- NPS at 3 m gains a factor 4.11 over SHMS-like electron acceptance.
- Transfer from the XEM2 setting to $Q^2 \simeq 11\ \mathrm{GeV}^2$: SIMC ratio $= 0.8865$.

45 PAC-day projection

Before NPS response	**10.69 M**
70% threshold + fiducial	**7.70 M**
80% threshold + fiducial	**7.51 M**

The response-reduced values remain provisional because of the 3×3 convention, final-state radiative photons, and inherited sweeper/passive geometry.

HMS trigger: the practical S1 rate is 40–60 kHz

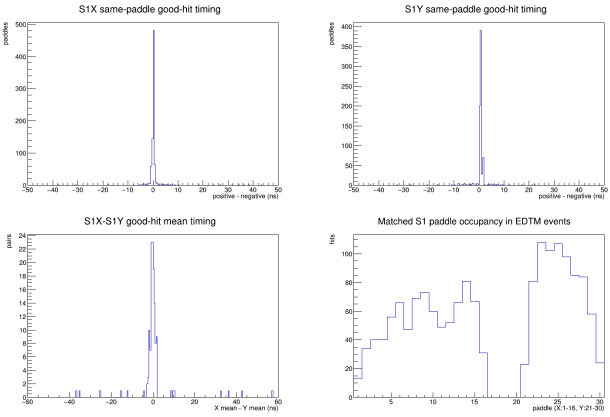

Run 17193 unbiased EDTM windows. A valid plane hit requires both PMTs on one physical paddle; valid X and Y paddle numbers are independent.


- The branch previously labeled "S1X AND S1Y" is actually **S1X OR S1Y**; its GEp-scaled rate is about 810 kHz.
- EDTM plane rates reproduce direct scalers to 3–4%.
- Requiring a double-ended paddle hit in both planes gives 12.73–14.84 kHz at the run conditions.
- Naive GEp scaling gives 51–60 kHz; scaler inclusion–exclusion gives 39.9 kHz.
- HMS 3-of-4 scales to about **2.9 kHz** if it is compatible with the FPP configuration.

Accidental scale

For 50 kHz HMS and 1 MHz NPS:

$$R_{\mathrm{acc}} = R_H R_N \Delta t = \begin{cases} 1\ \mathrm{kHz}, & 20\ \mathrm{ns} \\ 2\ \mathrm{kHz}, & 40\ \mathrm{ns}. \end{cases}$$

NPS singles: the inclusive-electron component is data anchored

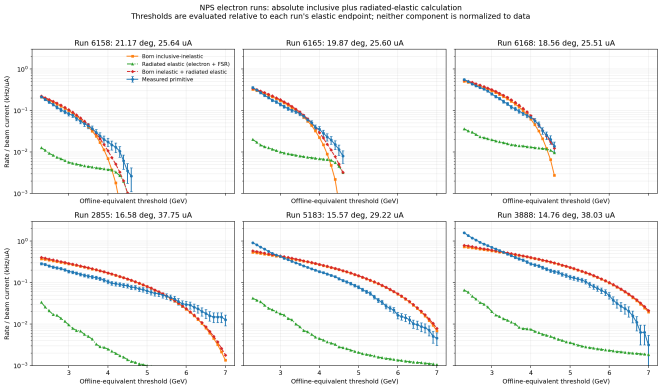


- Three-pass NPS electron data: generator/data $= 0.95$–1.35.
- Five-pass NPS electron data: trend reproduced; most discrepancies are conservative overpredictions.
- XEM2 SHMS electron-enriched trigger: 447.7 Hz predicted versus 592 Hz measured, or 74.8%.

GEp full-face prediction

Threshold	Inclusive e^-	+ radiated elastic
70%	14.34 kHz	**14.42 kHz**
75%	10.26 kHz	**10.30 kHz**
80%	7.05 kHz	**7.08 kHz**

These are genuine-electron rates, not the total NPS trigger rate.

Run 6887 establishes a large non-electron excess

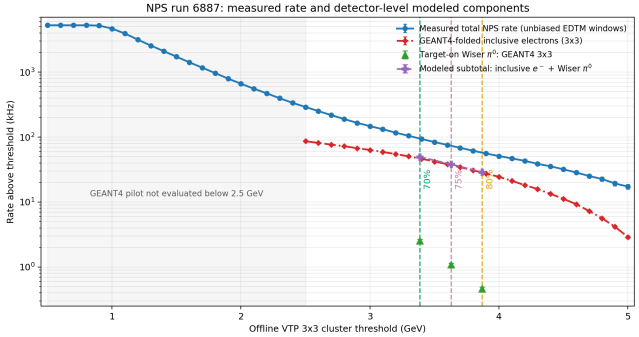

Run 6887: DVCS production, NPS on the photon arm; 8.456 GeV beam, 29.4 μA, 10 cm LH_2; NPS at 16.57° and 3.57 m. VTP single-cluster trigger/readout settings: 0.50/0.25 GeV; 8,972 unbiased 1-μs EDTM windows after the 25–35 μA current selection.

What the data establish

At 70–80% threshold, detector-level inclusive electrons explain only about 25–50% of the measured rate. Target-on Wiser π^0 adds only 2.55, 1.09, and 0.46 kHz at the marked thresholds; transported π^- is below 0.04 kHz. **These modeled channels do not close the excess.**