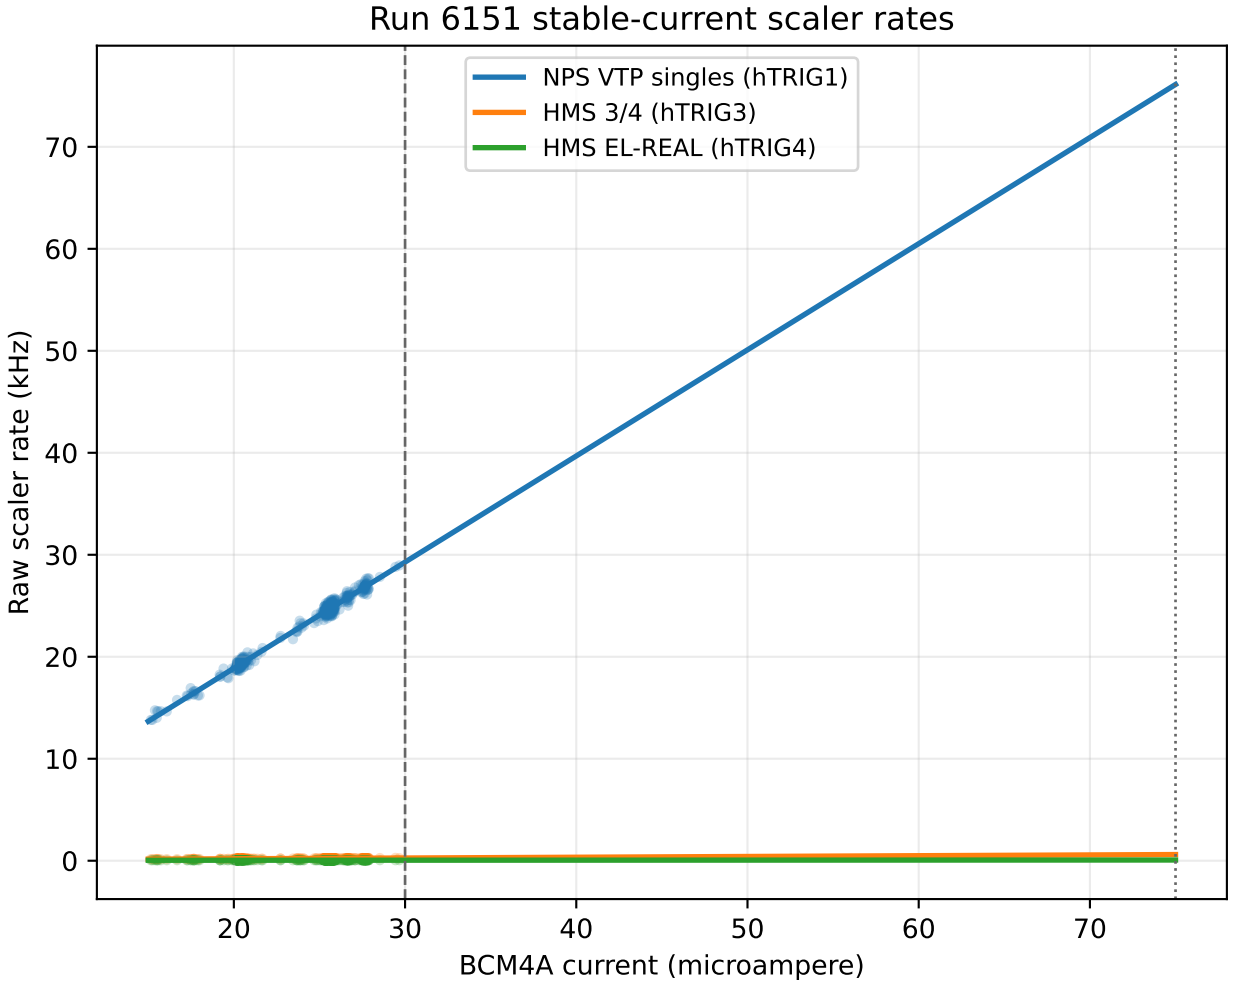
Run 6151 stable-current scaler rates
NPS VTP singles (hTRIG1)
HMS 3/4 (hTRIG3)
HMS EL-REAL (hTRIG4)
Raw scaler rate (kHz)
BCM4A current (microampere)
0
10
20
30
40
50
60
70
20
30
40
50
60
70

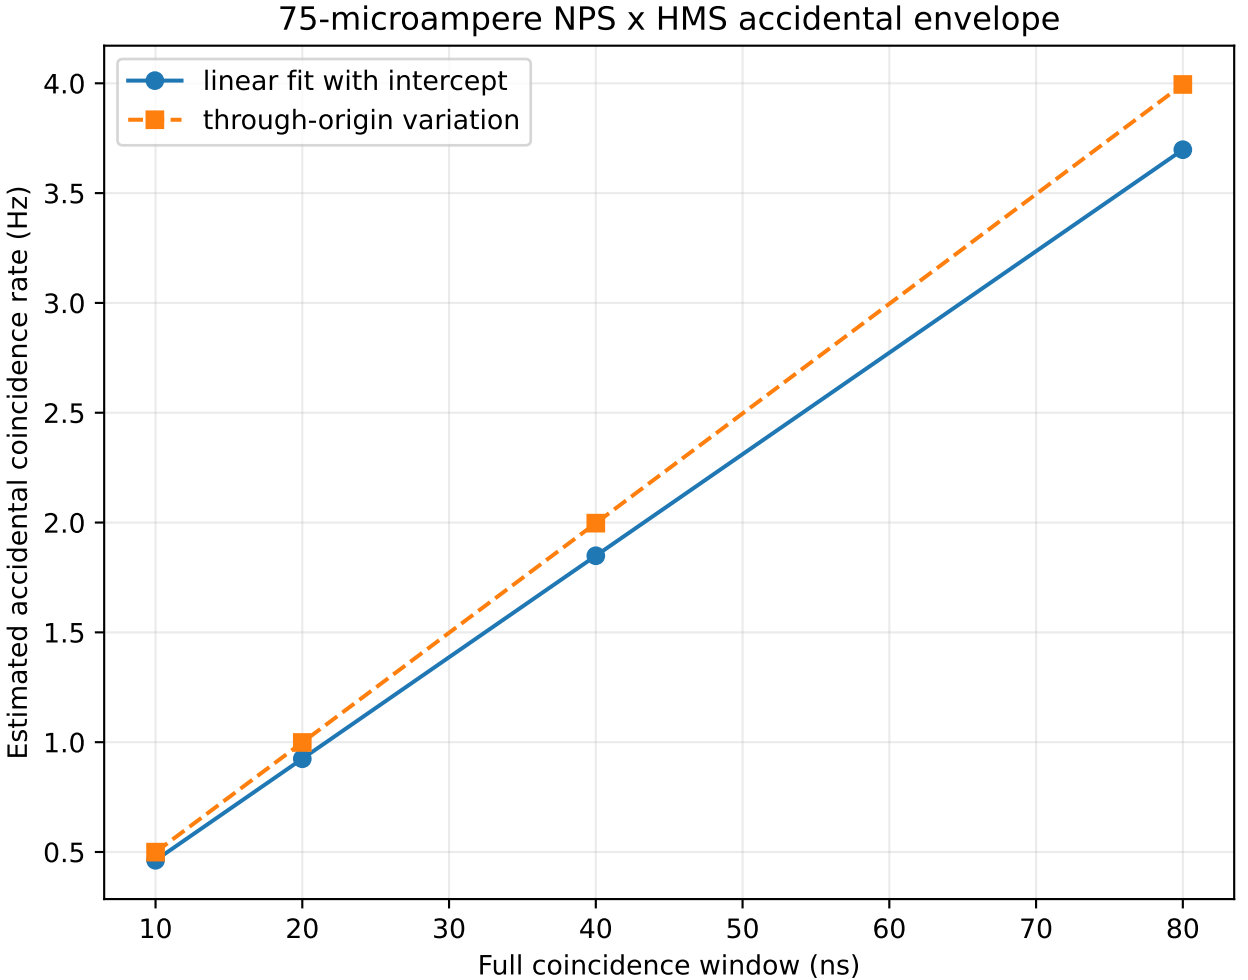
75-microampere NPS x HMS accidental envelope
linear fit with intercept
through-origin variation
Estimated accidental coincidence rate (Hz)
Full coincidence window (ns)
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0
10
20
30
40
50
60
70
80