
edwardsvacuum.com

PROPOSAL FOR: COSMOS 12

PREPARED FOR CENTRAL NEW MEXICO CC
JULY 29, 2026

QUOTE NUMBER: NG_NRYC4F000_20260729

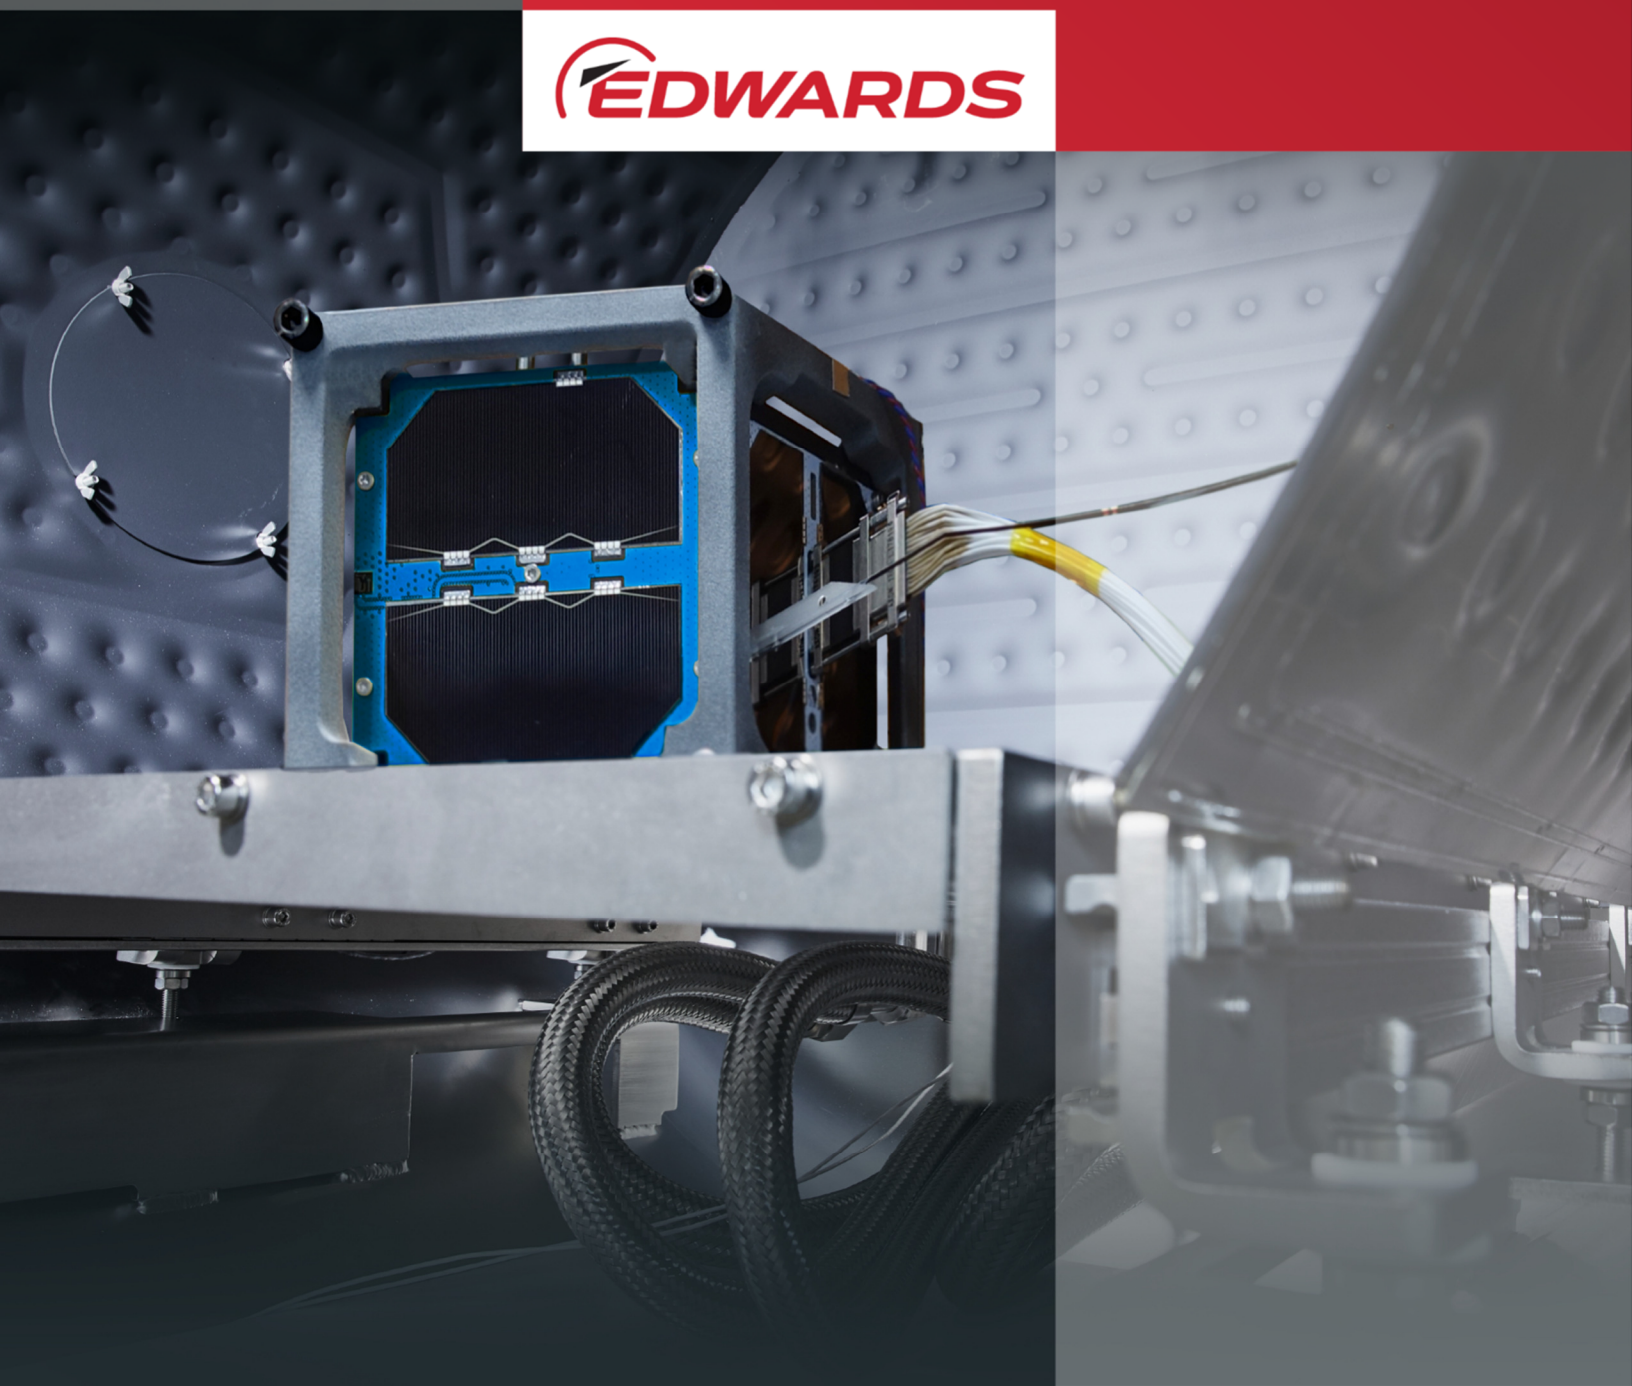

Contact: Brian Rashap
Company: Central New Mexico Community College

Address: 900 University Blvd SE
Albuquerque, NM 87106

Phone: 505-850-6352
Email: brashap@cnm.edu

July 29, 2026

Quotation for System COSMOS 12 | NRYC4F000

Dear Brian,

Thank you very much for your interest in our products. We are pleased to offer you our System COSMOS 12.

The Highlights of the System are the following:

- A 12” cubic stainless-steel Chamber with a hinged front door and DN 100 view port flanges.
- The Chamber is equipped with numerous flanges based on specifications.
- Edwards nEXT55D Turbomolecular pump and control unit.
- Edwards RV3 rotary vane pump.
- Series of valves and vacuum sensors.
- Electrical control cabinet which relies on relay and switch logic.

Sincerely,

Nate Groneberg
Vacuum One
651-470-0369
ngroneberg@vacuumone.com

Contents

Price Summary ***4***

Payment & Delivery Conditions ***4***

Important Information ***5***

Terms and Conditions ***6***

Scope of Supply and Technical Data *Error! Bookmark not defined.*

Price Summary

All amounts quoted in currency: USD

Item	Description	Qty	Item Price	Total Net Price
1	**System COSMOS 12 (NRYC4F000)**	1	$ 109,900.00	
	System Discount (19 %)		-19%	$ 89,019
2	**System COSMOS 12 (NRYC4F000)**	1	$ 109,900.00	
	System Discount (19%)		-19%	$ 89,019
3	**System installation, commissioning, and user training (NRYCSM000)**	1	$ 7850.00	$ 7850.00
4	**Estimated Freight/Shipping**	2	$ 7,000.00	$ 7,000.00
			Grand Total	**$ 192,888**

Payment & Delivery Conditions

Pricing
Ex-works factory, Export, Pennsylvania USA. Due to the current fluctuation of freight charges any change in freight terms shall be limited to prepaid and add at time of shipment.

Validity
This quotation is valid for thirty (30) days from the date of issue. Cost must be reviewed and approved on any order received after the validity date.

Material Procurement
Due to fluctuating commodity, transportation, energy, and other general cost, Edwards reserves the right to adjust our price to reflect the latest general cost increases, for orders with long lead times and/or for orders with any delay in receiving release for manufacture or extended wanted dates. Percent increases are based off the Bureau of Labor Statistics Producer Price Index (PPI). BLS Data Viewer

Edwards recommends release to order major materials at time of order placement.

Payment Terms
10% on Receipt and Acceptance by Edwards Vacuum LLC of Purchase Order from Customer
30% at the time of customer approval drawing submission
50% notice of readiness for shipment
10% final payment after SAT (not to exceed 60 days from shipment)

Cancellation Schedule

30 days after order receipt.....10%
Submittal of approval drawings 20%
Receipt of major materials 70%
Edwards' release for manufacture 100%

Lead Times and Delivery

Equipment: ..... 23 weeks ARO

- Lead times are respective of all payment conditions being met by the Buyer.
- If the Seller does not receive forwarding instructions within (30) days after the date the Seller notifies the Buyer that the Equipment is ready for dispatch from the Sellers works, or if from any cause beyond our control, the Seller is unable to dispatch the goods, but Equipment is complete, the Seller will arrange for storage at the agreed rate.
- If the goods are placed in storage facilities, the Seller will give the Buyer notice thereof, whereupon the Seller shall deliver to the Buyer the warehouse receipt, or a certificate of storage in our premises and presentation to the Buyer of such warehouse receipt or certificate together with the Sellers invoice shall constitute delivery of the equipment and the Buyer will make payment to the Seller accordingly. The invoice for any storage costs shall be settled monthly by immediate payment by the Buyer.

Estimated Weight and Dimensions
Estimated package weight ..... 419 lbs. (For 1 system)
Estimated package dimensions..... 75" x 39" x 36" (For 1 system)

Warranty
Twelve months after start-up at buyer's site or 18 months after delivery, whichever is sooner.
The warranty applies only when the system is installed and used as described in the delivered instruction manuals. Longer warranty term available upon request (additional costs will apply).

Liability
Edwards is liable for damages covered by insurance. Further claims are dependent upon deliberate action or gross negligence.

Important Information

Prices quoted for the Goods and Services listed in this Quotation are estimates and may be increased without notice in the event of increases in Supplier's costs of: (i) transport, labor and materials; (ii) handling of, and compliance with laws and regulations concerning hazardous materials; (iii) handling, delivery and shipping; (iv) energy or fuel; and/or (v) any other costs of supply or of Supplier's performance arising between the time of quotation and the time of Supply. All delivery dates are estimated from today's point of view and might be delayed for an uncertain period. Unless stated, prices quoted are net and exclusive of tax which will be charged (if applicable) at the prevailing rate. If applicable, carriage and packing will be charged based on the weight and shipping method used for a single consignment delivery. Please contact us for further information about delivery arrangements available in your region.

Terms and Conditions

Offer is subject to our standard terms and conditions of supply, a copy of which can be downloaded here: https://www.edwardsvacuum.com/en/terms-and-conditions.

Scope of Supply


ITEM 1 & 2: System COSMOS 12 (NRYC4F000)

MAIN COMPONENTS

1. Base System

Qty	Description
1	**COSMOS 12 Chamber and Frame** 12” x 12” x 12” cubic chamber. Stainless steel. Approximate internal volume: 1,728 in^3 Available flanges: • 3x DN 16 KF (for valves and gauges) • 4x DN 25 KF (3xs blanked off, 1x for APG 200) • 2x DN 40 KF (2xs blanked off) • 1x DN 63 ISO K (for turbo pump) **Blanked off flanges can be used for customer equipment. DN 40 KF is typical for optional RGA equipment.

**Image below shown with optional RGA unit, which is not included in this project proposal.

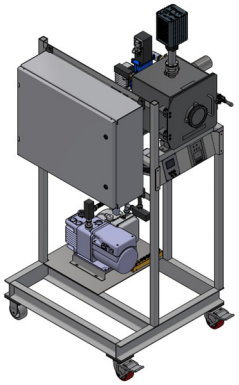

2. Pump System

Qty	Description
1	**(A65201906) RV3 115/230V 1PH 50/60HZ SET 115V** Inlet/Exhaust DN 25 KF Oil-sealed two-stage rotary vane pump. High vapour handling - high gas ballast flow rate for up to 220 gh-1 water vapour pumping capacity. Fast acting, automatic inlet valve for best in class anti-suck back protection - Safe process and systems
1	**(B8E210B01) nEXT55D Turbomolecular Pump**



Inlet/Exhaust: DN 63 ISO K / DN 16 KF
80 W
Designation “D” indicates hybrid bearing technology with Duplex design, offering a balanced performance between gas throughput and light gas compression.



1 **(A74402906) mXDS3s Scroll Pump**
Inlet/Exhaust: DN 16 KF / 1/8” BSP
This configured variant of the mXDS3s comes with a single phase 115V 50/60 Hz motor. The configured variants are fitted with an inlet isolation valve and a silencer is in the scope of supply



3. Instrumentation and Controls

Qty	Description
3	**(D1G1011100) APG200-XM-NW16** RJ 45, 0-10 V Linear Analog Output Edwards new APG200 series high performance compact Pirani Gauge is the perfect vacuum measurement solution across a spectrum of applications due to its compact size, LED light ring, integrated set points and flexibility of connections/outputs.
1	**(D2G0021100) AIM-X-NW25 S/S Active in Magnetron Gauge** RJ 45, 0-10 V S-shape Analog Output Edwards AIM series, active Inverted Magnetron vacuum gauges combine the gauge head and controller in one compact active unit. These are new digital versions of gauges that have proved to be rugged and reliable in a wide range of applications ranging from scientific instruments to industrial processes.
1	**(D39721000) TIC Turbo & Instrument Controller 100W RS232** A compact turbo controller with a large clear graphical display, an intuitive user interface and serial communications providing full remote control and data logging functions via a new Windows™ based PC program. The controller automatically recognizes and supports one 24 V turbomolecular pump from the EXT/nEXT range. Cooling and vent valve support is provided directly from the controller. Turbo and instrument models add the ability to control up to 3 of our range of Active gauges. The TIC controller is mounted to the frame outside of the electrical cabinet.







1 **(D39700000) TIC Instrument Controller 3 Head RS232**
The TIC Instrument controller offers comprehensive control and display of up to 3 compatible Edwards gauges depending on the model. An intuitive user interface, 6 set points, and full Windows Software for control and data logging functionality.
The TIC controller is mounted to the frame outside of the electrical cabinet.




4. Valves

Qty	Description
1	**(B65251000) Gate Valve - BGV - LOTO Pneumatic**
6	**(C41215000) Angle Valve - PV16PKS**

5. Electrical Control Cabinet

Qty	Description
1	**Electric Control Cabinet. 115V/1Ph/60 Hz, Approx. 500 W** With a key to switch between remote and manual modes. Manual mode - One open/close buttons for every valve with LED for status. - One start /stop button for every pump with LED for status. - The transmitters are read out through the TIC controllers. Remote mode - A 24V I/O interface to control the valves and the backing pumps and to get the status. - The TIC controllers have an RS232 connection to read out the transmitter and control the Turbo pump. **NOTE:** The electrical control cabinet does not include a PLC for interlocks. If interlocks are needed, additional cost will need to be added.

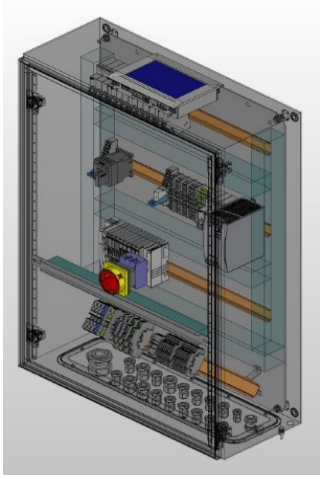

System Information & Requirements

- Completely mounted, wired, and tested.
- All in one frame, the turbo will sit on the rear side of the chamber.
- The backing pump/roughing pump will sit beneath the chamber.

Supplementary Documentation
System installation & operating instructions Operating instructions and user manuals for installed components

ITEM 3 — System Installation, Commissioning, and User Training (PN NRYCSM000)

Qty	Description
1	**System installation, commissioning, and user training offered for both systems on 1 trip** System installation, commissioning, and operator training for the system. (Commissioning not to exceed: **2 days**) Includes airfare, travel accommodations and expenses. The start of commissioning requires that all necessary electrical supplies and interfaces (electrical power, cooling water, compressed air, exhaust lines, etc.…) are available. The system must also be removed from the crate and placed in its final installed location. Main power connection to be provided by the customer. Training for following would be enabled with this module: - Rough vacuum with dry pump - High vacuum via: *Roughing Pumping through the turbo pump via a dry pump. *Roughing with bypass via dry pump. - Manual mode without interlock. - Remote mode, where the students can program their own pump down cycles, over the TIC controllers and the 24V DC I/O connections.

OPTIONAL Spares List (quoted separately upon request and not included)

**Any services discussed are not included in the cost.
**Before you send your equipment to us for service or for any other reason, you must complete a Declaration of Contamination Form.
**It is recommended to ask for a service plan for a trained Edwards service engineer to service the equipment.

Qty	Description
	(A65201906) RV3 Spares
	Service Intervals:
	Monthly – check oil, replace as needed.
	Yearly – inspect and clean inlet filter, gas ballast components, oil-level sight glass, motor fan cover and enclosure, power cord secure fit check.
	15,000 Hours – clean and overhaul the pump, test the motor condition.
	30,000 Hours – fit new vanes/blades
1	(A65201130) Blade Kit
1	(A65201032) Spare Cartridge
1	(A65201134) Spare Outer Shaft Seal
1	(A65201136) Spare Shaft Sleeve
1	(A65299500) Pump Motor Kit
	(B8G210B01) nEXT85D Spares
	Service Intervals:
	20,000 ramp up cycles or 10 years – major service which includes a rotor replacement.
	35,000 Hours – Replace oil cartridge and oil-lubricated bearing.
1	(B8E200845) Bearing Echange Tooling
1	(B8G200828) Replacement Oil Cartridge Assembly
1	(B8G200811) Bearing and Oil Kit
	(A74402906) mXDS3s Spares
	Service Intervals:
	Varied – consult the manual for tip seal maintenance.
	32,0000 Hours – bearing replacement.
1	(GK7440002) Bearing Replacement Kit
1	(GK7440001) Tip Seal Kit
1	**(D1G1011100) APG 200**
1	**(D2G0021100) AIM 200**
1	**(C41215000) DN 16 KF Valve**
1	**(B28703055) Solenoid for DN 16 KF Valve**