

SPECIFICATIONS

AO Medium	TeO2		
Acoustic Velocity	4.2 mm/μs		
Active Aperture*	2.5 mm 'L' X	0.32 mm 'H'	
Center Frequency (Fc)	200 MHz		
RF Bandwidth	50 MHz @	-10 dB Return Loss	
Input Impedance	50 Ohms Nominal		
VSWR @ Fc	1.3 :1 Max		
Wavelength	780-850 nm		
Insertion Loss	3 % Max		
Reflectivity per Surface	1 % Max		
Anti-Reflection Coating	MIL-C-48497		
Optical Power Density	250 W/mm ²		
Contrast Ratio	1000 :1 Min		
Polarization	90 ° To Mounting Plane		

PERFORMANCE VS WAVELENGTH

Wavelength (nm)	830
Saturation RF Power (W)	2.0
Bragg Angle (mr)	19.8
Beam Separation (mr)	39.6


PERFORMANCE VS BEAM DIAMETER

Beam Diameter (μm)	150
at Wavelength (nm)	830
Diffraction Efficiency (%)	70*
Rise Time (nsec)	29
Modulation Bandwidth	21.0
Beam Ellipticity	10

**For Reference
Only**

Outline Drawing:

Package Style 2

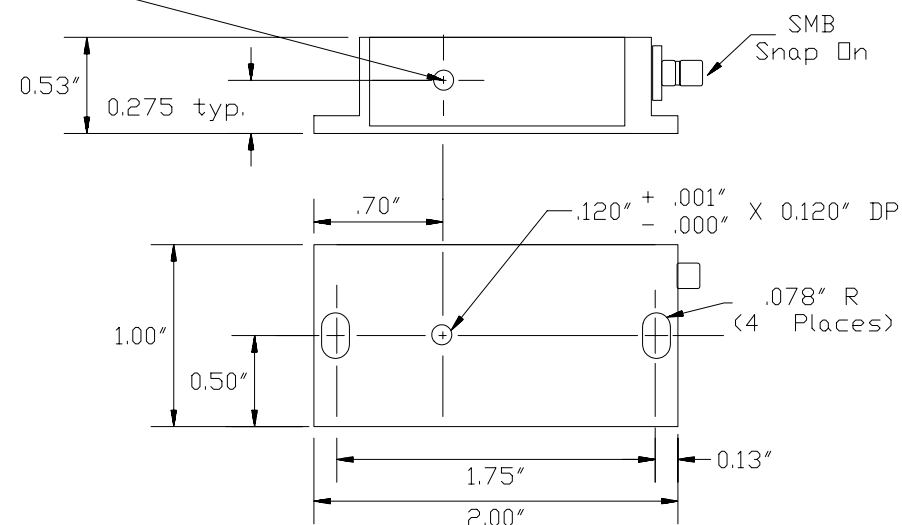

Notes:

*Diffraction Efficiency at 1 Watt RF Power.

THIS DOCUMENT IS THE PROPERTY OF CRYSTAL TECHNOLOGY, INC. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES CRYSTAL TECHNOLOGY AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF CRYSTAL TECHNOLOGY.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	A. Campi 6/27/2002	Crystal Technology, Inc.		
MATERIAL:	CHK		DESCRIPTION: AOMO 3200-124		
FINISH:	APP				
	APP		PART NUMBER: 97-01544-01	REV: F	SHEET 1 OF 1

*Active Aperture: Aperture over which performance specifications apply.