DIGIT:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
	0	4	2	1	-	-		-	X	-		X	-				-		-	-	X

CONNECTOR (5–6) · ETHERNET (9–10) · MOUNTING (14) · CHASSIS (15) · POSITION (16–17) B · (18–19) C

NOTES:
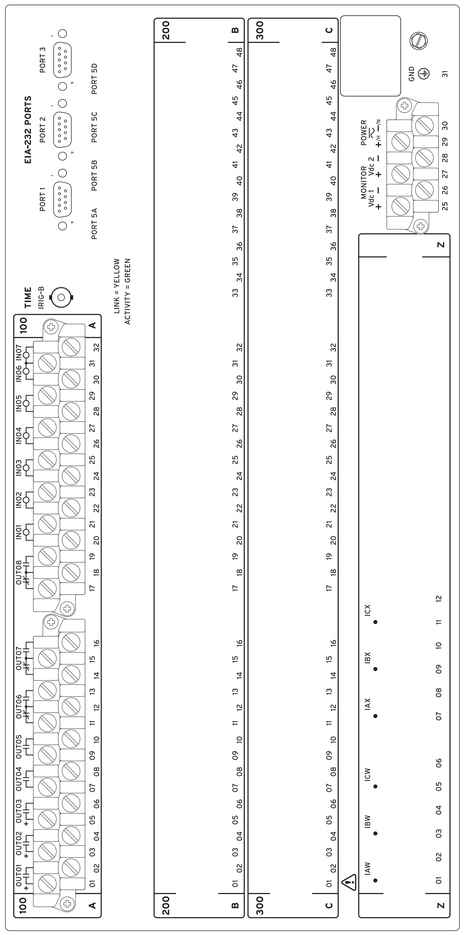
1. IF YOU ARE NOT FAMILIAR WITH MASTER CONFIGURABLE DRAWINGS, PLEASE SEE INSTRUCTIONS LOCATED ON THE SEL WEBSITE IN THE DRAWINGS.
2. THIS DRAWING IS FOR THE 421, 5U, VERTICAL ONLY.
3. USE LAYERS TO UPDATE VIEWS. SOME COMBINATIONS MAY NOT BE AVAILABLE. VERIFY PART NUMBER USING SEL WEBSITE.
4. ONLY SELECT ONE OPTION PER SLOT. CHASSIS 5U, FRONT PANEL W/ (24) TARGET LEDS, (12) OPERATOR CONTROL PUSHBUTTONS & TRI-COLOR LEDS and AUXILIARY TRIP/CLOSE PUSHBUTTON (24) OPTOISOLATED LEVEL-SENSITIVE INPUT, (4) HIGH-CURRENT INTERRUPTING FORM A OUTPUTS ARE COMBINED OPTIONS.
5. DRAWINGS ARE UPDATED FREQUENTLY. PLEASE USE CURRENT LINK FROM SEL WEBSITE.
6. DASHED SLOTS DO NOT AFFECT PRODUCT GRAPHICS AND ARE NOT SHOWN AS CONFIGURABLE OPTIONS.