


Finger profiles (mm) — Y0 = FPC edge, +Y toward ribbon

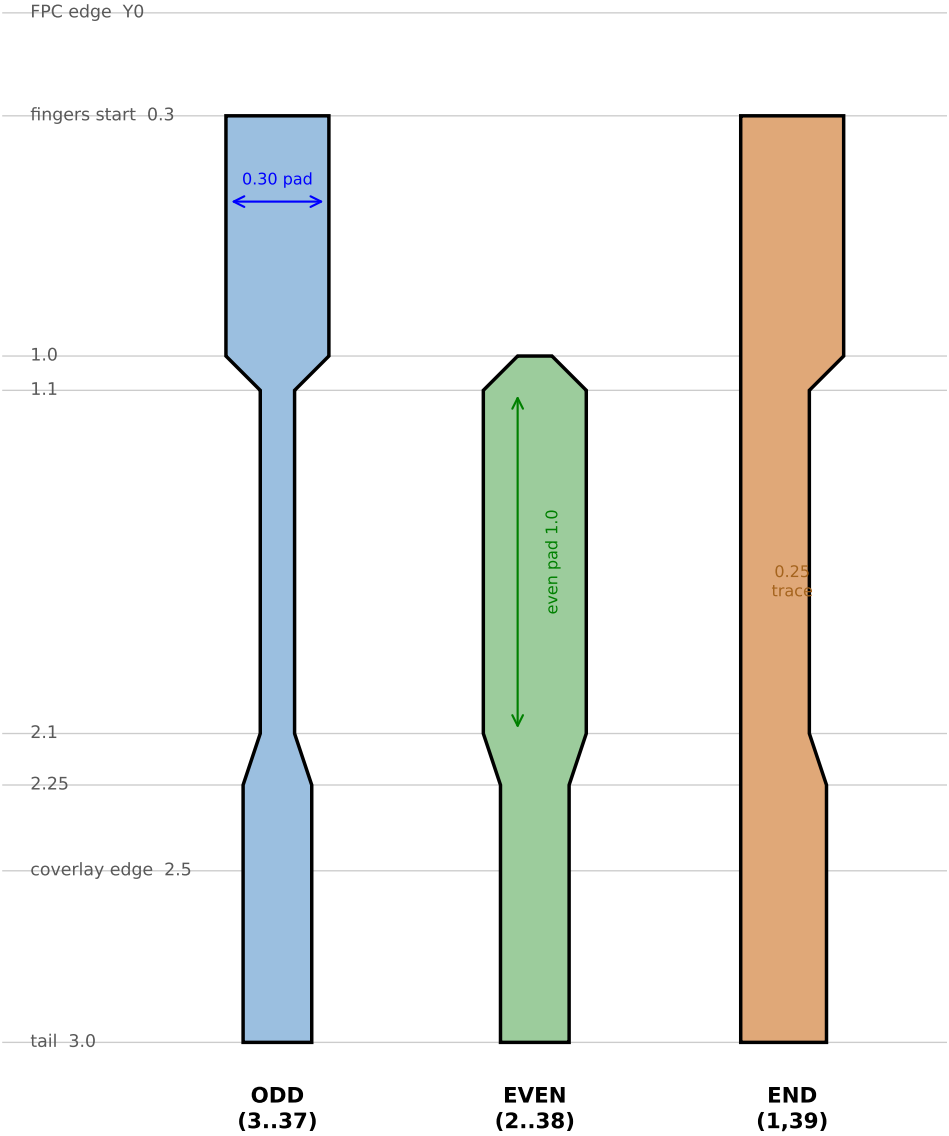

GOLDEN-FINGER SPECIFICATION

Connector	Hirose FH26W-39S-0.3SHW(60), bottom-contact ZIF
Positions / pitch	39 / 0.30 mm (straight-through pin 1->1 .. 39->39)
Pattern	STAGGERED 2-row (odd short / even long) — matches datasheet Recommendation
Odd fingers (3..37)	exposed 1.1 mm; 0.30 pad -> 0.1 trace between evens -> 0.2 ribbon
Even fingers (2..38)	exposed 2.1 mm; 0.1 tip -> 0.30 pad -> 0.2 ribbon
End fingers (1,39)	0.30 pad -> 0.20 (past finger 2) -> 0.25 outer trace, mirror pair
Finger start setback	0.30 mm from FPC leading edge
Edge margin	0.15 mm (outer finger copper to FPC side edge)
Tongue widths	F/C/B = 12.0 / 11.4 / 10.8 mm
Taper-zone spacing	0.0707 mm min (= 0.10 x cos45, per datasheet geometry)
Tip relief	R0.2 max at the two outer tongue corners
Coverlay window	SINGLE opening over finger bank, 12.0 x 2.5 mm (back side)
Construction	2-layer double-sided flex; 39 plated through-vias front->back
Finish / thickness	ENIG; finished mating thickness 0.20 +/-0.03 mm
Stiffener	0.15 mm SUS under connector mounting area

NOTES

- Golden finger rebuilt to the Hirose Recommended-FPC STAGGERED pattern (prior uniform-comb versions were incorrect).
- The 0.0707 mm taper zone copper spacing is intentional (datasheet geometry).