


Finger profiles (mm) — Y0 = FPC edge, +Y toward ribbon

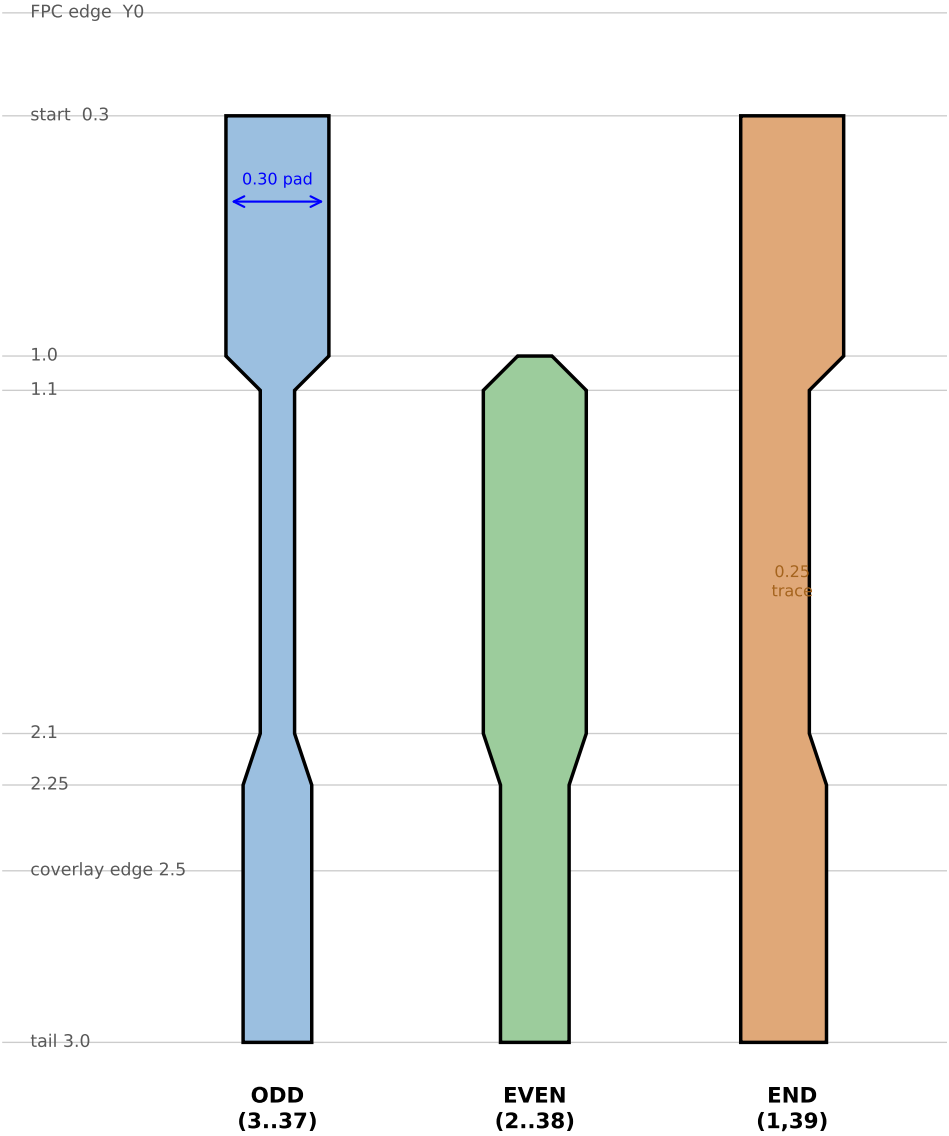

GOLDEN-FINGER SPECIFICATION

Connector	Hirose FH26W-39S-0.3SHW(60), bottom-contact ZIF
Positions / pitch	39 / 0.30 mm (straight-through 1->1 .. 39->39)
Pattern	STAGGERED 2-row (odd short / even long) — matches datasheet
Odd (3..37)	exposed 1.1 mm; 0.30 pad -> 0.1 trace -> 0.2 ribbon
Even (2..38)	exposed 2.1 mm; 0.1 tip -> 0.30 pad -> 0.2 ribbon
Ends (1,39)	0.30 pad -> 0.20 -> 0.25 outer trace, mirror pair
Finger setback	0.30 mm from FPC leading edge
Edge margin	0.15 mm (outer copper to FPC side edge)
Tongue F/C/B	12.0 / 11.4 / 10.8 mm
Taper spacing	0.0707 mm min (= 0.10 x cos45, per datasheet)
Tip relief	R0.2 max, two outer tongue corners
Coverlay	SINGLE window over finger bank, 12.0 x 2.5 mm (back)
Construction	2-layer flex; 39 plated through-vias front->back
Finish / thick.	ENIG; mating thickness 0.20 +/-0.03 mm
Stiffener	0.15 mm SUS under connector area

NOTES

1. Finger rebuilt to Hirose Recommended-FPC STAGGERED pattern (prior comb wrong).
2. 0.0707 mm taper spacing is intentional (datasheet) — confirm process capability.