


Power: motor supply, buck 5 V, 5 V OR, LDO 3.3 V, VDDA, VM sense

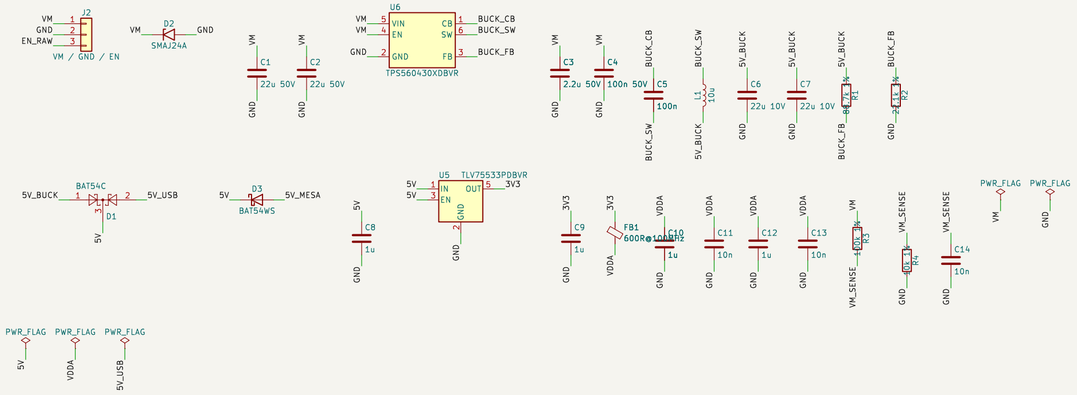


MCU STM32G473CEU6: clock, reset, SWD, LED, HWID, NTC, spare

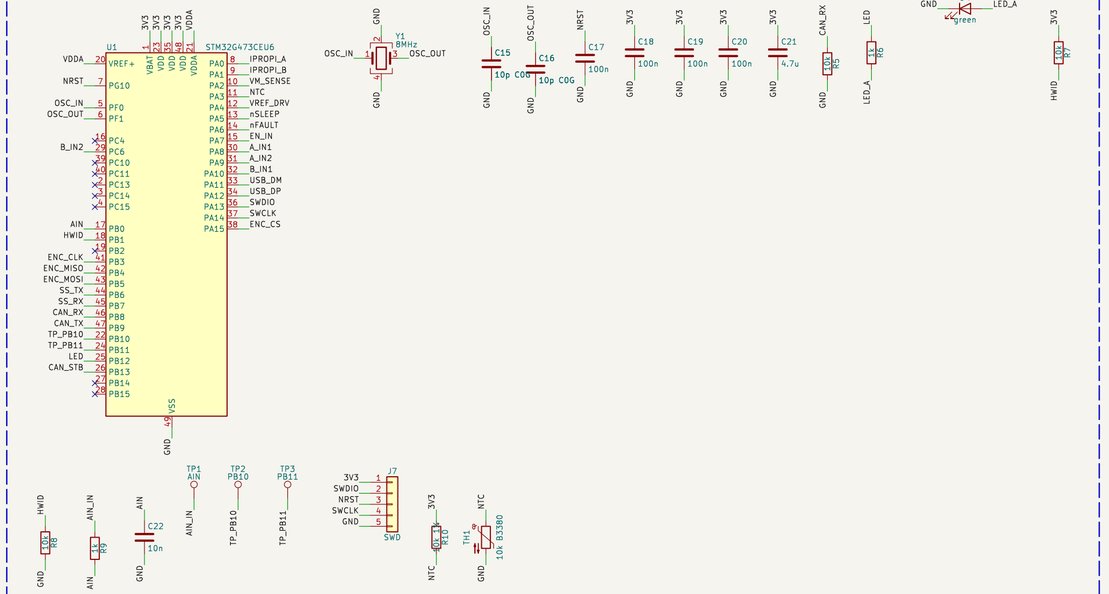


H-bridges: DRV8876 per coil, current sense, motor connector

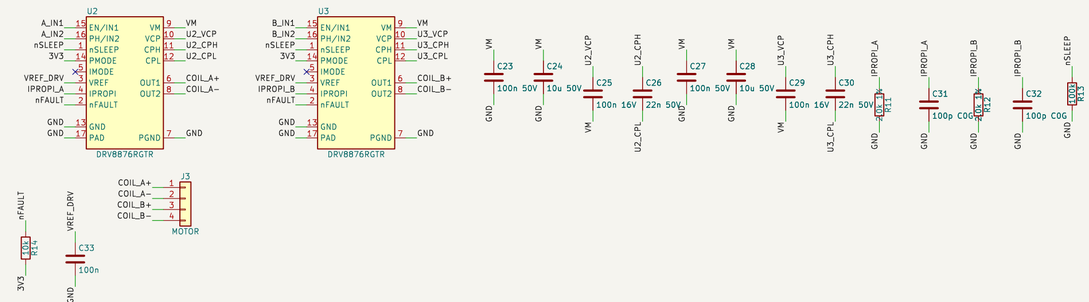

Encoder AS5047P, enable input

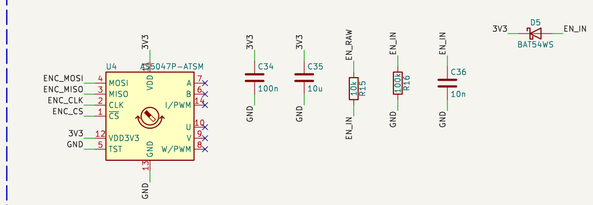

USB-C, smart-serial (variant A), CAN (variant B), mounting

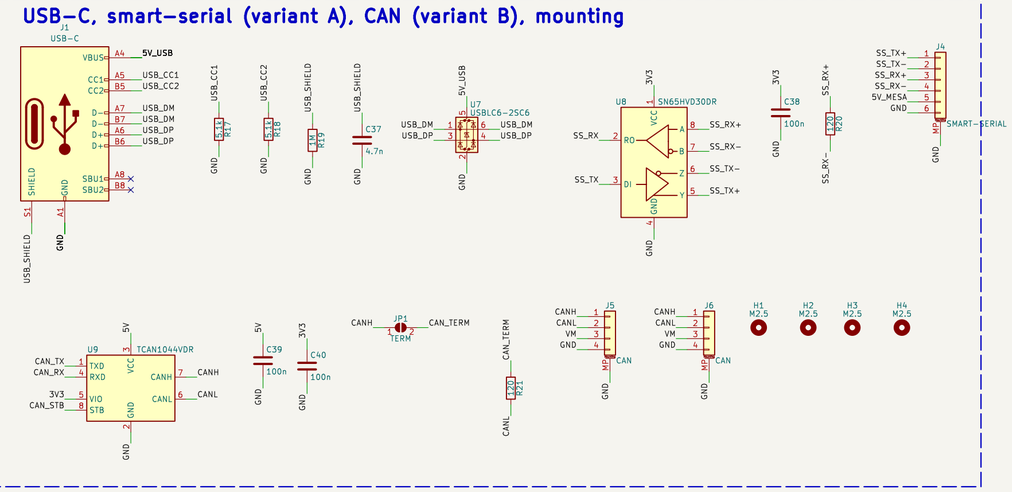

brdstepper: STM32G473 + AS5047P + 2x DRV8876, 28 x 28 mm on the back of a NEMA11 motor.
Connections are by net name (net labels): docs/brdstepper_hw.md is the reference.
Variant A fits U8/J4 (smart-serial to a Mesa card), variant B U9/J5/J6/JP1 (CAN).

Parts with * in their Note: check against the datasheet before layout
Generated by gen/gen.py from docs/brdstepper_hw.md: edit gen/parts.py

stmbl

Sheet: /
File: brdstepper.kicad_sch

Title: brdstepper: closed-loop NEMA11 stepper drive

Size: A2	Date: 2026-10-23	**Rev: 0.1**
KiCad E.D.A.	kicad-cli 7.0.11+dfsg-1build4	Id: 1/1