


Supply: M8 IN / OUT (passed through), reverse polarity, TVS, buck 5 V, LDO 3.3 V, voltage reset

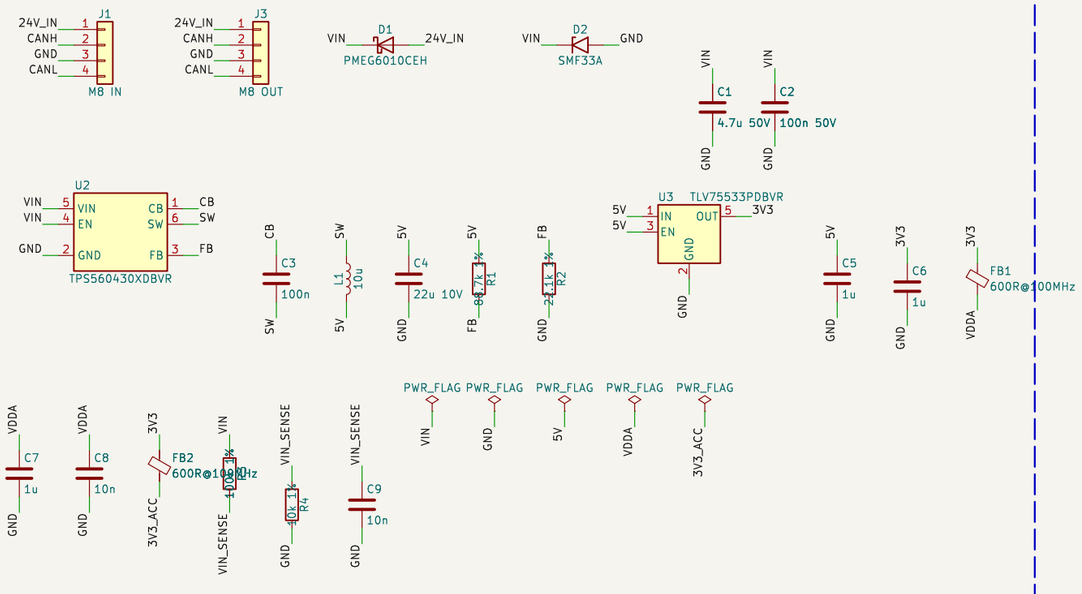


IIS3DWB accelerometer (SPI1), TMP117 thermometer (I2C2)

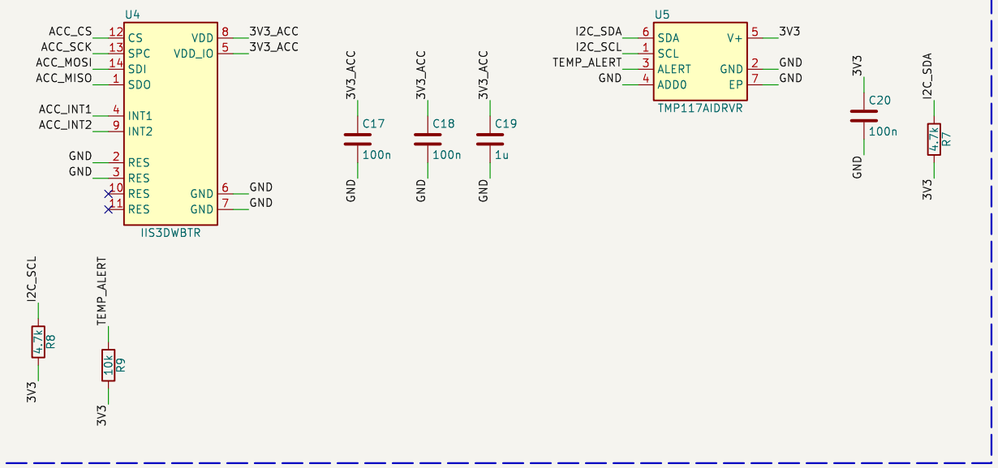

MCU: STM32G473CEU6, SWD, LED

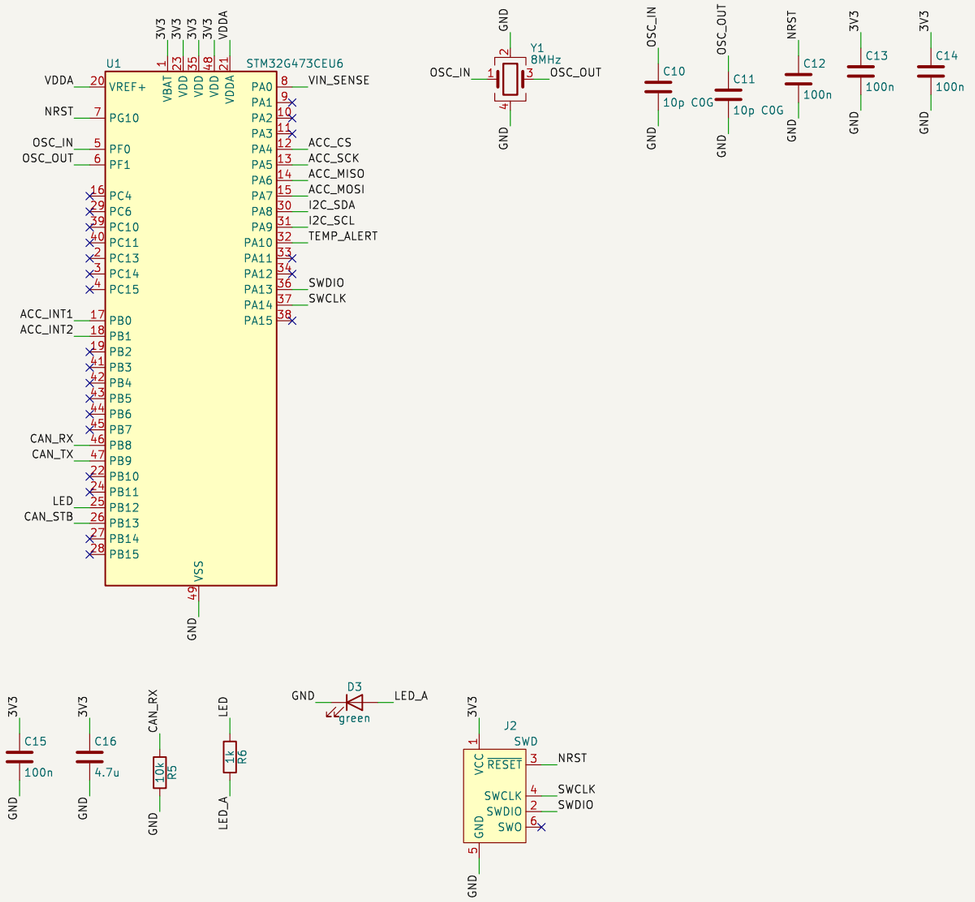

CAN FD transceiver, mounting (termination: a plug in the last sensor's OUT)

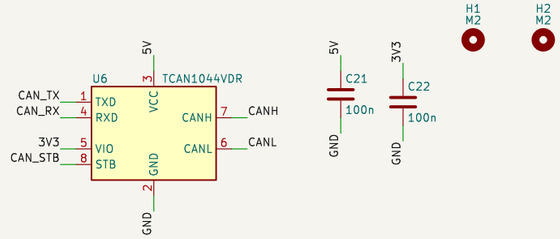

vibsensor: STM32G473 + IIS3DWB + TMP117 + TCAN1044V on a round board, potted in the sensor's housing.
Two M8 4-pin sockets (1 V+, 2 CAN_H, 3 GND, 4 CAN_L): IN (J1) and OUT (J3), the bus and supply passed through;
the last sensor's OUT takes a terminator plug (120 ohm). Node number and name over the bus (no jumpers).
Connections are by net name (net labels): docs/vibsensor.md and vibsensor/inc/vs.h are the reference.

Parts with * in their Note: check against the datasheet before layout
Generated by hardware/kigen from docs/vibsensor.md: edit gen/parts.py
stmbl

Sheet: /
File: vibsensor.kicad_sch

Title: vibsensor: vibration and temperature sensor, CAN FD

Size: A3	Date: 2026-10-26	**Rev: 0.1**
KiCad E.D.A.	kicad-cli 7.0.11+dfsg-1build4	Id: 1/1