


Supply: reverse polarity, TVS, buck 5 V, LDO 3.3 V, filtered rails, bus voltage

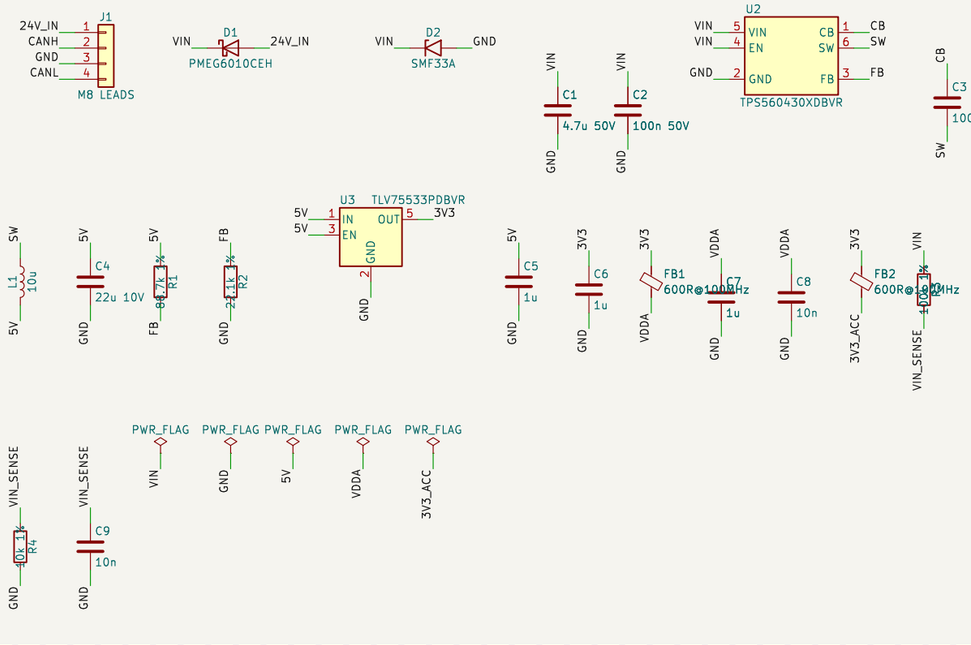


IIS3DWB accelerometer (SPI1), TMP117 thermometer (I2C2)

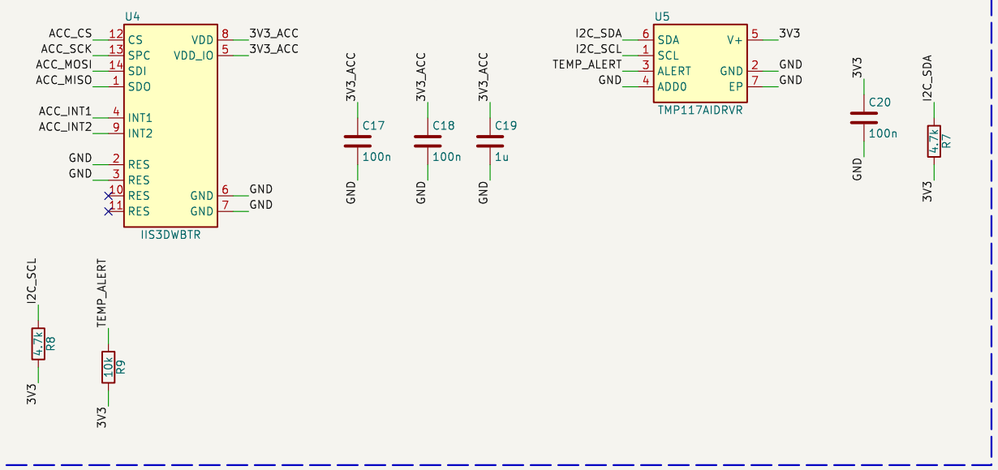

MCU STM32G473CEU6: clock, reset, LED, SWD

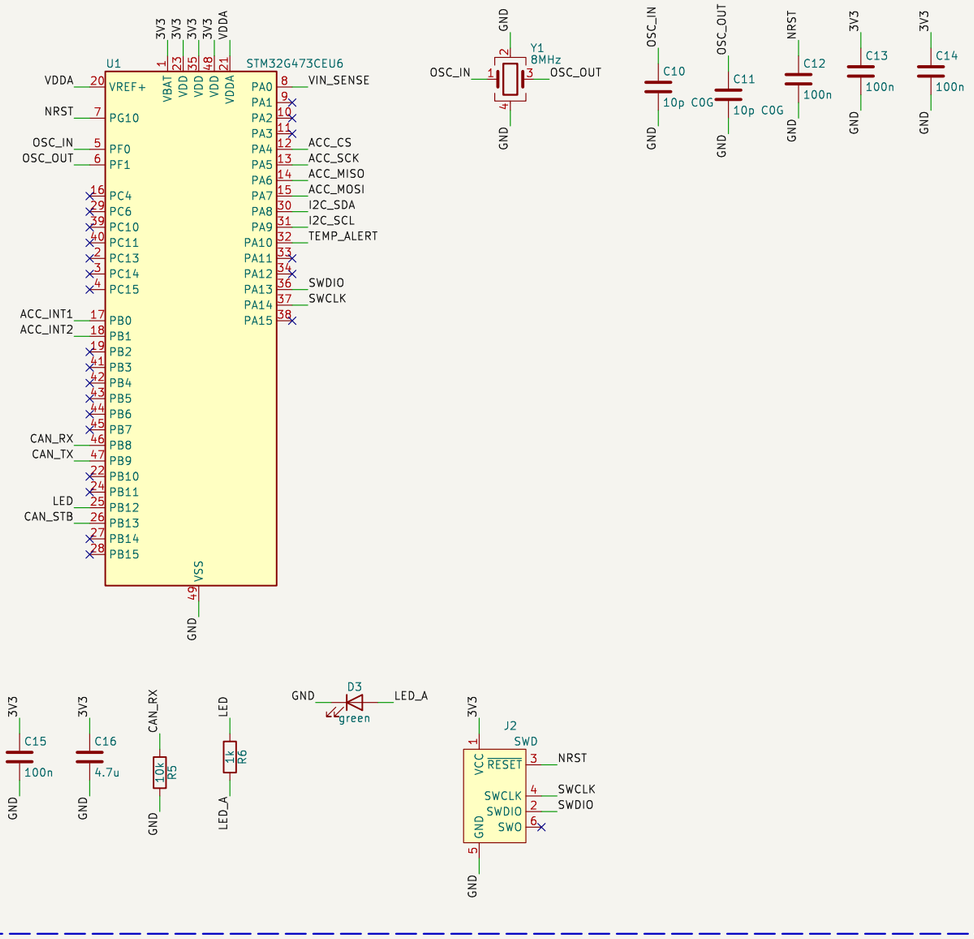

CAN FD transceiver, termination, mounting

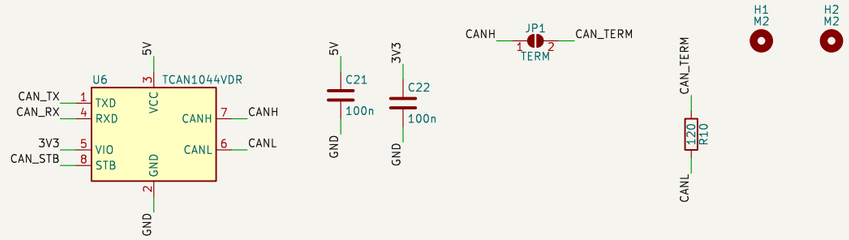

vibsensor: STM32G473 + IIS3DWB + TMP117 + TCAN1044V on a round board, potted in the sensor's housing.
M8 4-pin (1 V+, 2 CAN_H, 3 GND, 4 CAN_L) soldered to J1. Node number and name over the bus (no jumpers).
Connections are by net name (net labels): docs/vibsensor.md and vibsensor/inc/vs.h are the reference.

Parts with * in their Note: check against the datasheet before layout
Generated by hardware/kigen from docs/vibsensor.md: edit gen/parts.py
stmbl

Sheet: /
File: vibsensor.kicad_sch

Title: vibsensor: vibration and temperature sensor, CAN FD

Size: A3	Date: 2026-10-26	**Rev: 0.1**
KiCad E.D.A.	kicad-cli 7.0.11+dfsg-1build4	Id: 1/1