

Inductive Speed Sensor IA-C

www.bosch-motorsport.com

BOSCH
 Invented for life


- Crankshaft/wheel speed
- 24.0 mm, 315° depth/lead
- Bore diameter 18 mm

This sensor is designed for incremental measurement of rotational speed (e.g. crankshaft or wheelspeed). The inductive sensor consists of a bar magnet with a soft magnetic pole pin supporting an induction coil with two connections. Every time a ferromagnetic ring gear turns past this sensor, it generates a voltage in the coil which is directly proportional to the periodic variation in the magnetic flux. The rotational speed is reflected on a periodic interval between the voltage's zero transition points.

It is available in a DR-25 sleeve with various connector options.

The main benefit of this sensor is the combination of a high quality production part and robust, compact design.

Application

Application	Speed
Max. frequency	≤ 15 kHz
Target wheel air gap AG	0.8 ± 0.3 mm
Operating temp. range (sensing head)	-40 to 130°C
Storage temperature range	-40 to 100°C
Max. vibration	800 m/s ² max. 80 h

Technical Specifications

Mechanical Data

Magnetic pole	Round
Bore diameter	18 mm
Tightening torque	8 Nm
Weight w/o wire	40 g
Installation depth L2	23.7 mm

Electrical Data

Coil resistance	860 Ω ± 10 %
Inductance max.	370 mH ± 15 %
Output voltage max.	200 VP-P

Environment

Target wheel diameter D	160.43 mm
Thickness t	> 5 mm
Width of teeth b1	4.1 mm
Width of gap b2	4.3 mm
Depth of teeth h1	3.5 mm

Depth of teeth h2 1.75 mm

Number of teeth 60-2

Connectors and Wires

Connector 1 928 404 227

Mating connector D 261 205 335-01
3-pole Compact

Pin 1 Sig+

Pin 2 Sig-

Pin 3 Scr


Various motorsport and automotive connectors are available on request.

Please specify the required wire length with your order.

Ordering Information

Inductive Speed Sensor IA-C

Order number **0 261 210 136**

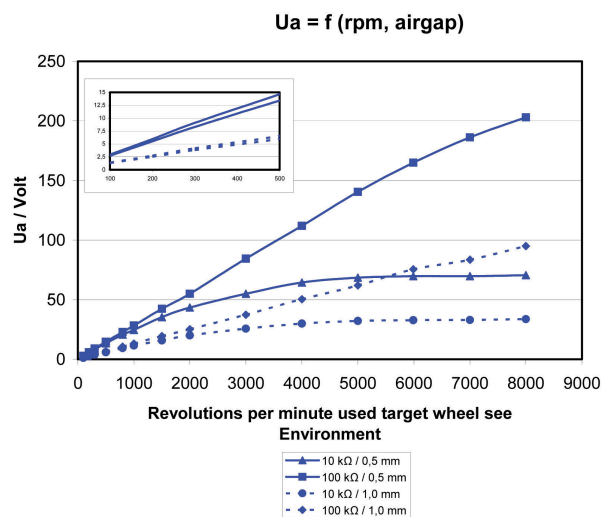

Installation Notes

The inductive speed sensor IA-C is developed for wheels made of ferro-magnetic material.

If a wheel with different dimensions is used (see Environment), the technical function has to be tested individually.

Please contact our technical consultancy for more information.



Please find further application hints in the offer drawing at our home-page.

The inductive speed sensor IA-C is developed for wheels made of ferro-magnetic material.


Safety Note

The Sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.

Dimensions

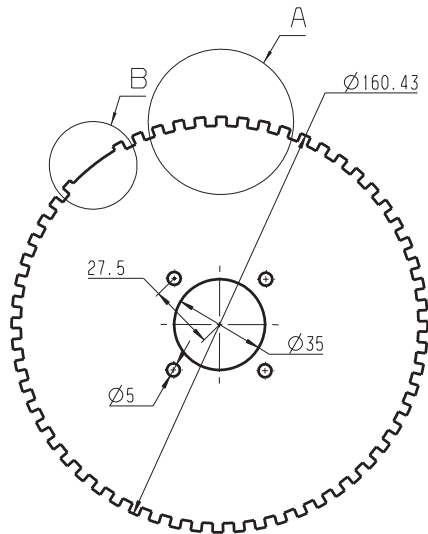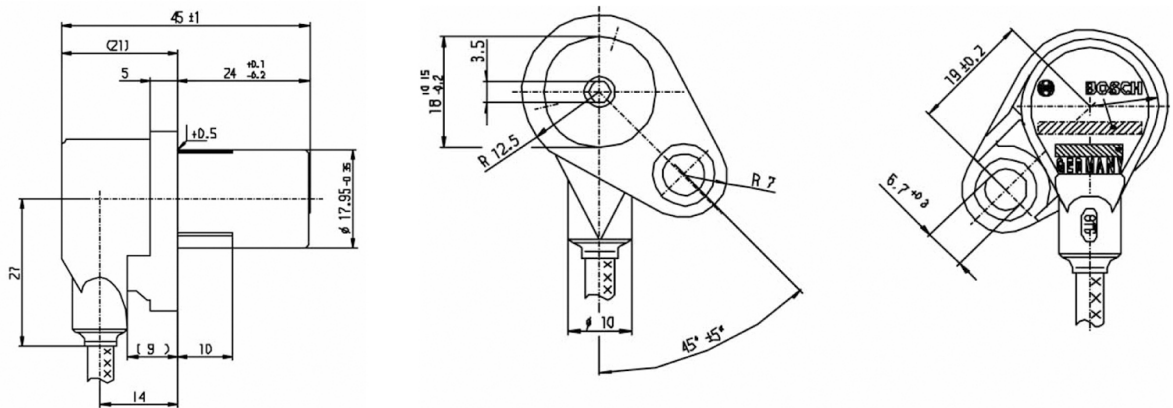

60-2 Teeth

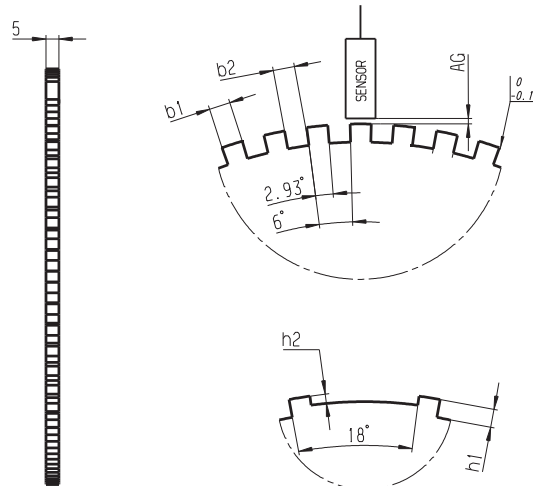

Left view

Detail A

Detail B

Represented by:

Europe:
Bosch Engineering GmbH
Motorsport
Robert-Bosch-Allee 1
74232 Abstatt
Germany
Tel.: +49 7062 911 9101
Fax: +49 7062 911 79104
motorsport@bosch.com
www.bosch-motorsport.de

North America:
Bosch Engineering North America
Motorsport
38000 Hills Tech Drive
Farmington Hills, MI 48331-3417
United States of America
Tel.: +1 248 876 2977
Fax: +1 248 876 7373
motorsport@bosch.com
www.bosch-motorsport.com

Latin America:
Robert Bosch Ltda
Motorsport
Av Juscelino Kubitschek de
Oliveira 11800
Zip code 81460-900
Curitiba - Parana
Brasil
Tel.: +55 41 3341 2057
Fax: +55 41 3341 2779

Asia-Pacific:
Bosch Engineering Japan K.K.
Motorsport
18F Queen's Tower C, 2-3-5 Minato Mirai
Nishi-ku, Yokohama-shi
Kanagawa 220-6218
Japan
Tel.: +81 45 650 5610
Fax: +81 45 650 5611
www.bosch-motorsport.jp

Australia, New Zealand and South Africa:
Robert Bosch Pty. Ltd
Motorsport
1555 Centre Road
Clayton, Victoria, 3168
Australia
Tel.: +61 (3) 9541 3901
motor.sport@au.bosch.com