


FRONT VIEW (FACE A, COSMETIC) 1:2

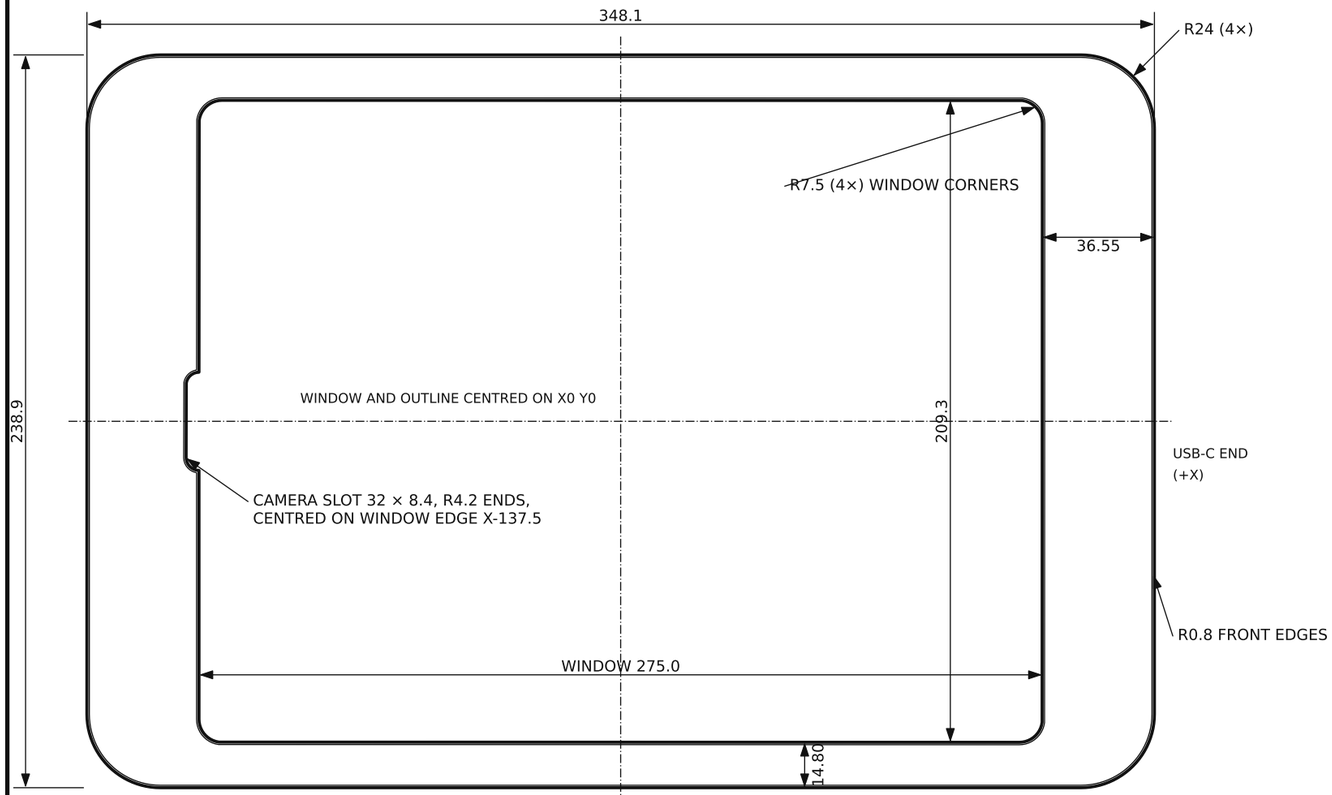

BACK VIEW (VIEWED FROM BEHIND, X MIRRORED) 1:2

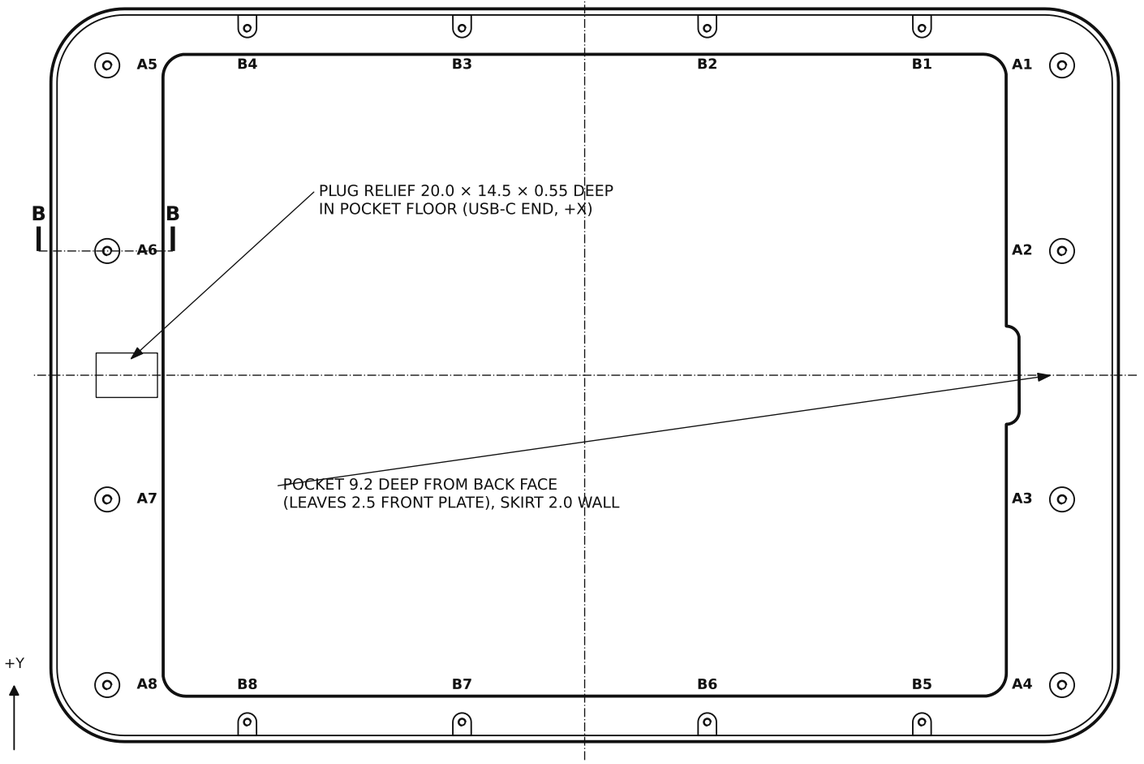

SECTION B–B 4:1 (TYPICAL A1–A8)

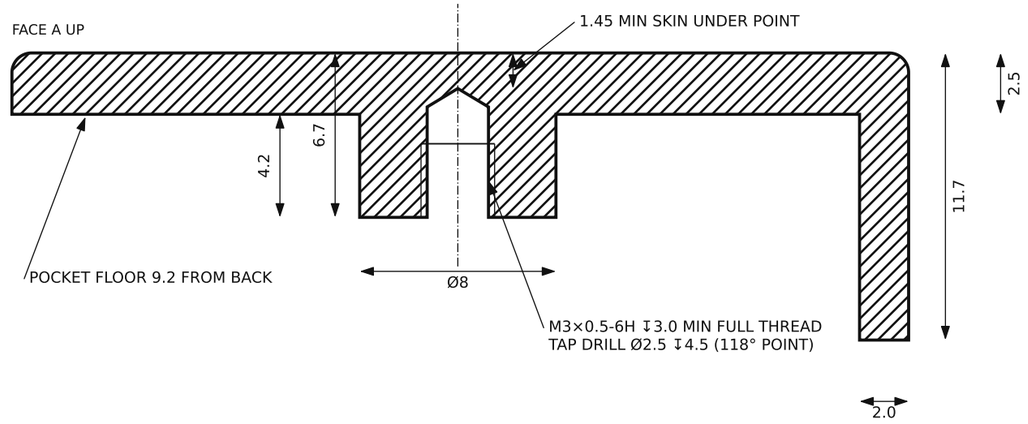

B1–B8 (M2.5): SAME DEPTHS ON A Ø6 BOSS TIED INTO THE SKIRT,
TAP DRILL Ø2.05 ↧4.5, M2.5×0.45-6H ↧3.0, 1.58 MIN SKIN

HOLE TABLE (X/Y FROM PART CENTRE, STEP FRAME; BLIND FROM BOSS TIP, BACK SIDE)

HOLE	X	Y	THREAD	TAP DRILL	DRILL ↧	THREAD ↧
A1	-155.68	+101.00	M3×0.5-6H	Ø2.5	4.5	3.0 MIN
A2	-155.68	+40.50	M3×0.5-6H	Ø2.5	4.5	3.0 MIN
A3	-155.68	-40.50	M3×0.5-6H	Ø2.5	4.5	3.0 MIN
A4	-155.68	-101.00	M3×0.5-6H	Ø2.5	4.5	3.0 MIN
A5	+155.68	+101.00	M3×0.5-6H	Ø2.5	4.5	3.0 MIN
A6	+155.68	+40.50	M3×0.5-6H	Ø2.5	4.5	3.0 MIN
A7	+155.68	-40.50	M3×0.5-6H	Ø2.5	4.5	3.0 MIN
A8	+155.68	-101.00	M3×0.5-6H	Ø2.5	4.5	3.0 MIN
B1	-110.00	+113.10	M2.5×0.45-6H	Ø2.05	4.5	3.0 MIN
B2	-39.99	+113.10	M2.5×0.45-6H	Ø2.05	4.5	3.0 MIN
B3	+39.99	+113.10	M2.5×0.45-6H	Ø2.05	4.5	3.0 MIN
B4	+110.00	+113.10	M2.5×0.45-6H	Ø2.05	4.5	3.0 MIN
B5	-110.00	-113.10	M2.5×0.45-6H	Ø2.05	4.5	3.0 MIN
B6	-39.99	-113.10	M2.5×0.45-6H	Ø2.05	4.5	3.0 MIN
B7	+39.99	-113.10	M2.5×0.45-6H	Ø2.05	4.5	3.0 MIN
B8	+110.00	-113.10	M2.5×0.45-6H	Ø2.05	4.5	3.0 MIN

NOTES

1. 3D MODEL shell_6061.step DEFINES ALL GEOMETRY NOT DIMENSIONED HERE. THREADED HOLES ARE MODELLED AT TAP DRILL DIAMETER; THREAD PER THIS DRAWING.
2. 8× M3×0.5-6H ↧3.0 (A1–A8) AND 8× M2.5×0.45-6H ↧3.0 (B1–B8). BLIND HOLES: DO NOT BREAK THROUGH OR MARK FACE A. 1.4 MIN METAL UNDER DRILL POINT.
3. FACE A IS COSMETIC: NO TOOL, CLAMP OR FIXTURE MARKS. FRONT EDGES R0.8 AS MODELLED.
4. DEBURR ALL EDGES, BREAK SHARP EDGES 0.2 MAX UNLESS NOTED.
5. FINISH: FINE GLASS BEAD BLAST, THEN TYPE II ANODISE (COLOUR PER ORDER: CLEAR OR BLACK). MASK THREADS OR CHASE AFTER ANODISING.
6. GENERAL TOLERANCES ISO 2768-mK. FLATNESS OF FACE A 0.2 OVER FULL LENGTH.

FIRST-ANGLE

FLOAT MOUNT v6 · SHELL (iPad Pro 12.9″ (3rd gen))

DESIGN: BRENDAN · FILE: shell_6061.step · github.com/brendan779/ipad-pro-wall-mount

PART No.	MATERIAL	QTY
FM6-P129-SHELL	**6061-T6 AL, 15 mm PLATE**	**1**
FINISH	MASS	UNITS
BEAD BLAST + ANODISE	**≈231 g**	**mm**
SCALE	TOLERANCE	REV / DATE
1:2 (U.N.O.)	**ISO 2768-mK**	**A · 2026-10-21**