

Hôte C

\$ ping 192.168.0.2


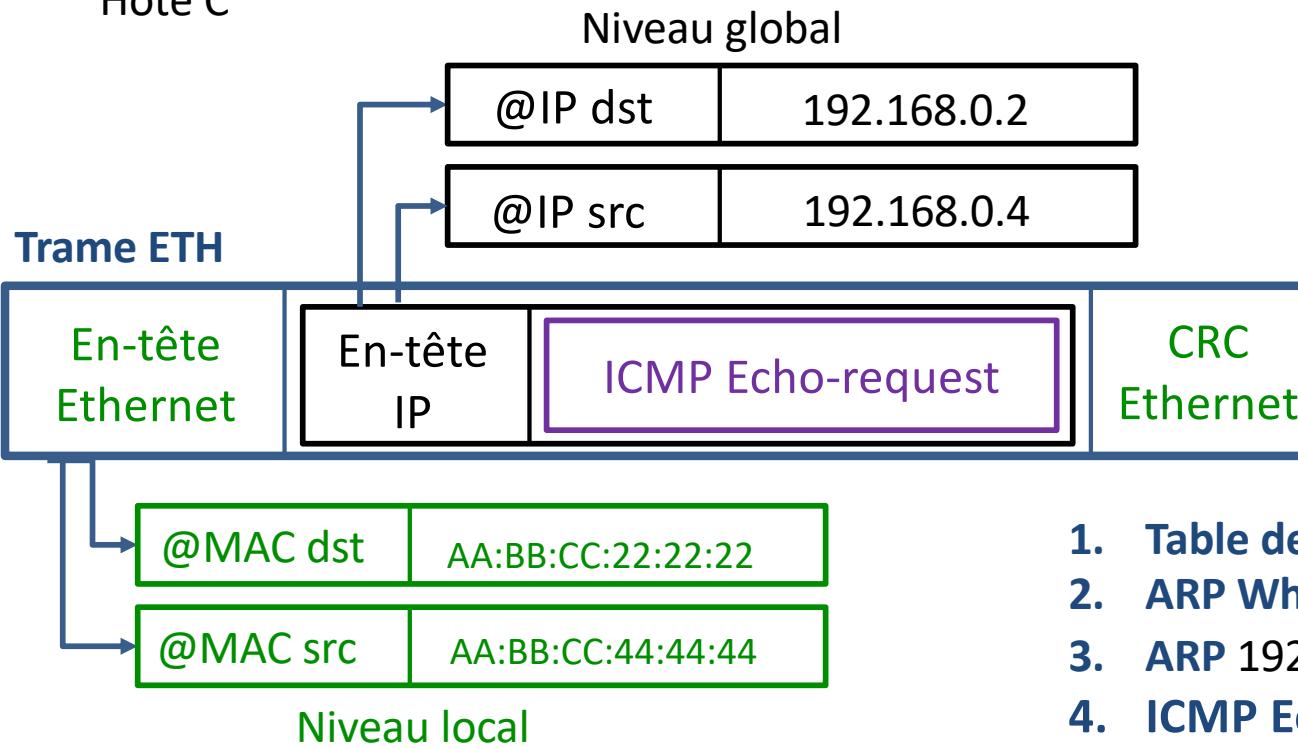


Table de routage de C

Destination	Passerelle
192.168.0.0	*
*	192.168.0.1

1. Table de Routage
2. ARP Who-has 192.168.0.2 ?
3. ARP 192.168.0.2 is-at AA:BB:CC:22:22:22
4. ICMP Echo-request

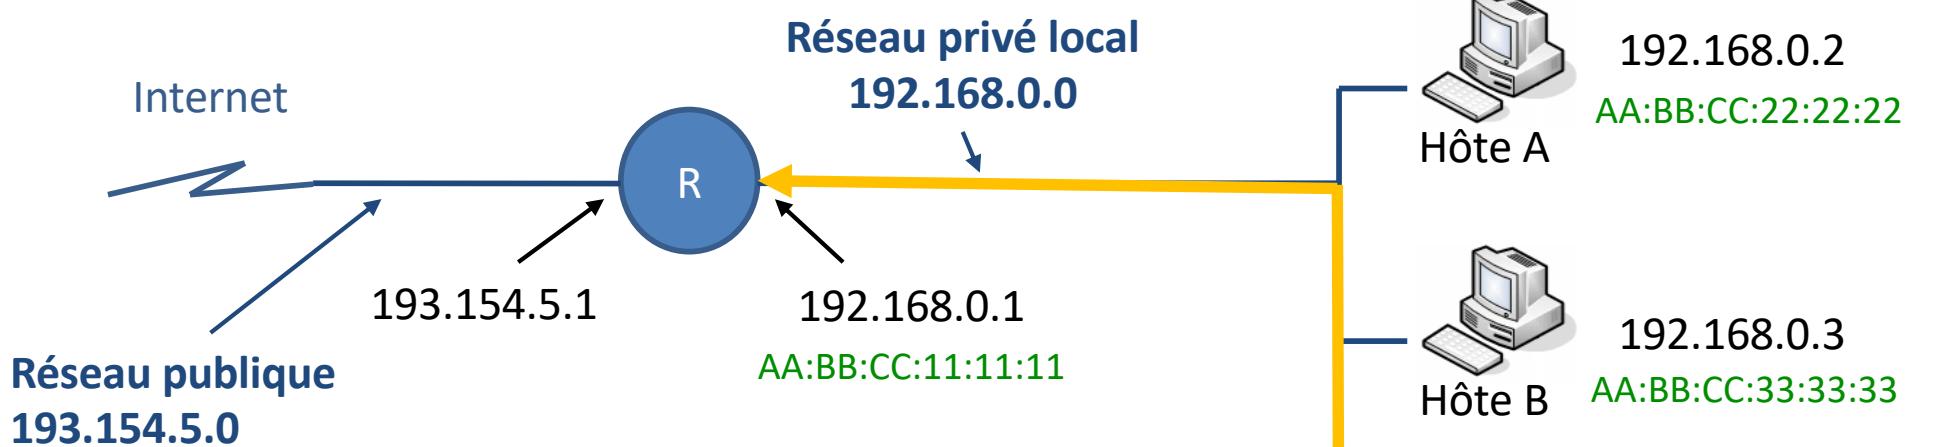

Hôte C

\$ ping 193.49.62.52

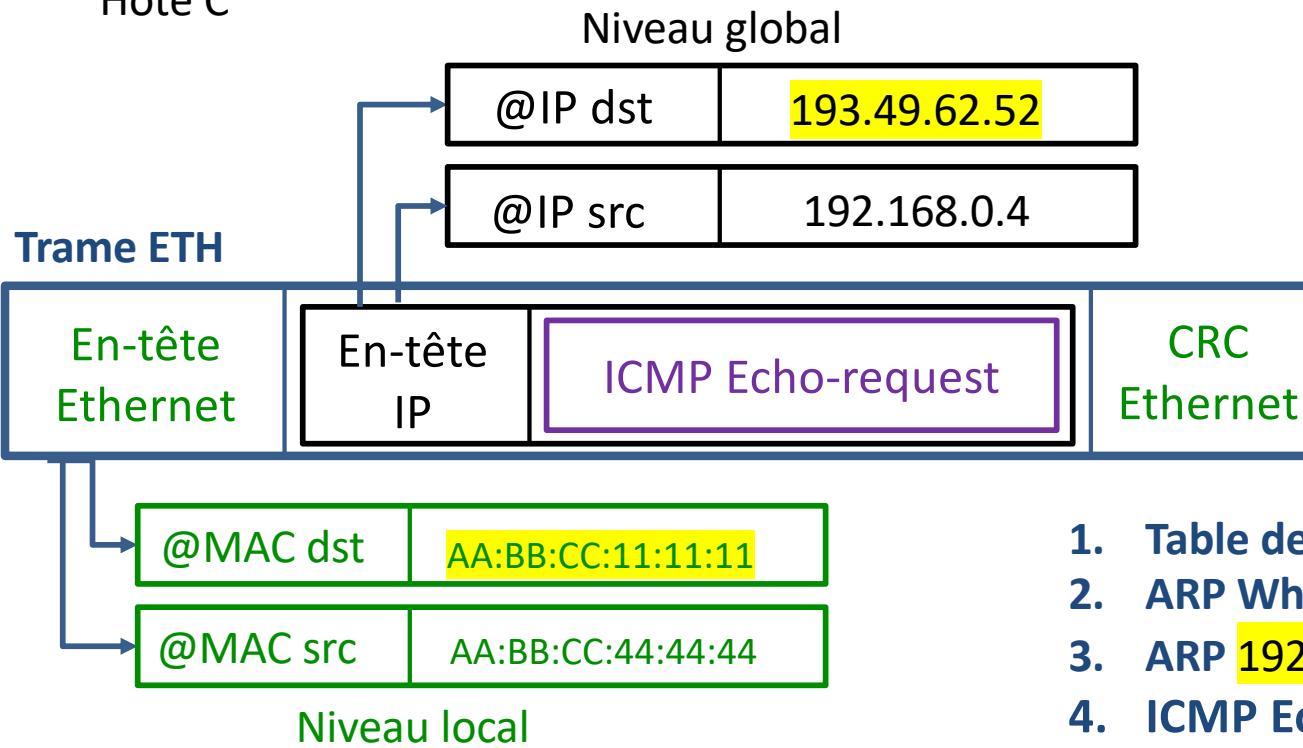


Table de routage de C

Destination	Passerelle
192.168.0.0	*
*	192.168.0.1

1. Table de Routage
2. ARP Who-has 192.168.0.1 ?
3. ARP 192.168.0.1 is-at AA:BB:CC:11:11:11
4. ICMP Echo-request

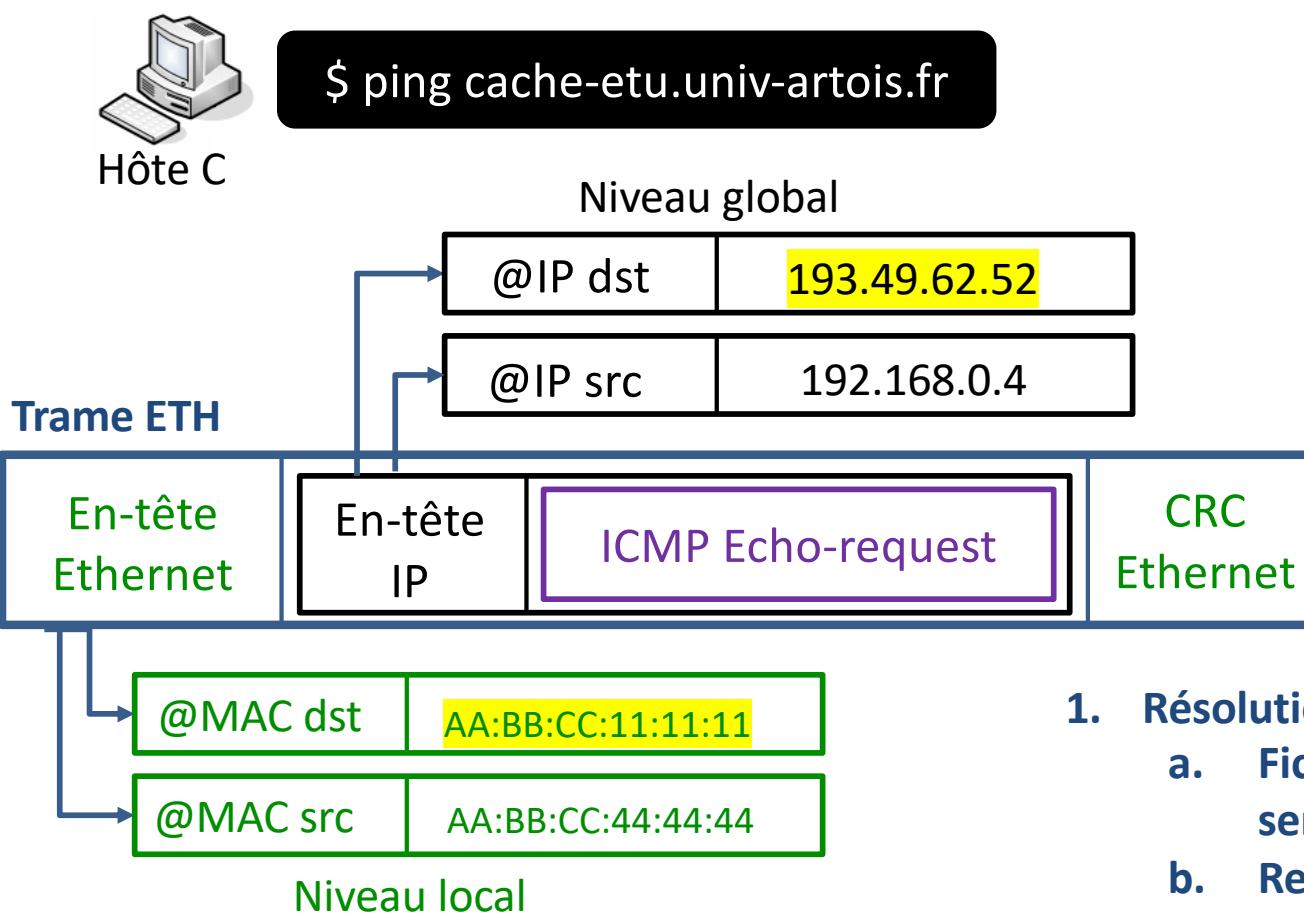
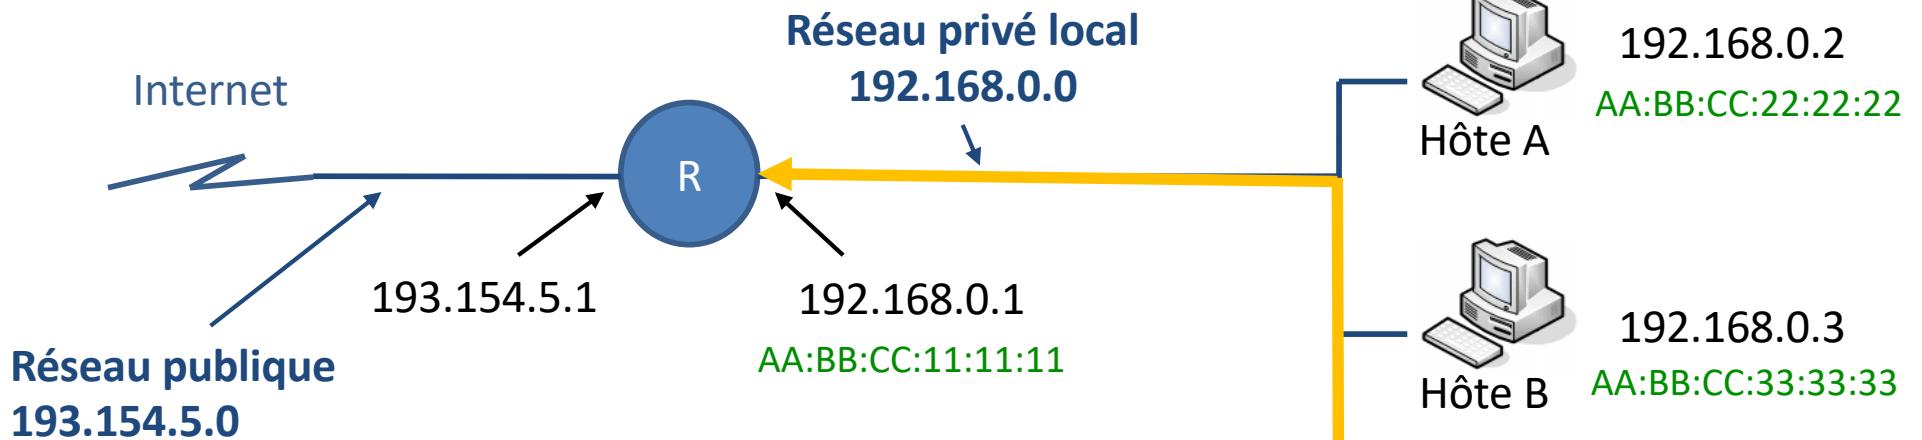


Table de routage de C

Destination	Passerelle
192.168.0.0	*
*	192.168.0.1

1. Résolution DNS à faire
  - a. Fichier /etc/resolv.conf pour voir le serveur DNS
  - b. Requête DNS