



Exterior of Changing Bag

1. **Changing Bag** – consist of two parts, bag and folding changing mat
2. **Bag** – a single layer thin black nylon is used for the front, back and sides of the bag.
3. **Folding Changing Mat** – is attached to the bag only the upper edge that allows to comfortable place the baby on the mat. An ultra-plush nylon fabric is used for the exterior of the changing pad.



Front



Back



Folding Mat


Front and Back of Changing Mat Details

1. **Folding Changing Mat** – the mat is folded and fastened to the bag by loops and buttons. The loops are located on the mat, buttons are located on the front bag.
2. **Plush Front** – the front of the Changing mat is sewn with the desired design with 10mm foam sandwiched between the plush exterior and black nylon material. The Decorative cord is sewn around of the mat.
3. **Nylon Back (inner)** – The foam shall be sewn between the Plush front and a stretchy nylon back. The backing fabric shall be chosen so that the completed composite panel lays flat and is not warped.
4. **Nylon Back (outer)** – Final backing layer. This material shall be the same nylon fabric used for the rest of the bag body. Does it need to be sewn in the center, as you show a sewn circle.




Overview - Cord, Loops, Buttons

1. **Cord** - 10 mm cord, the cord is inside 25 mm trim
2. **Loop** - the loops are located between the plush detail and cord,
3. **Buttons** - buttons on the hinges are attached to the front detail bag. The diameter of the buttons is 25mm.
4. **Button Loop.** The button loop that contains the button when it looped is made from a short piece of nylon webbing, as shown by the image at middle. The width of the loop - 10mm, length - 60mm. There is a stitch on the button loop.

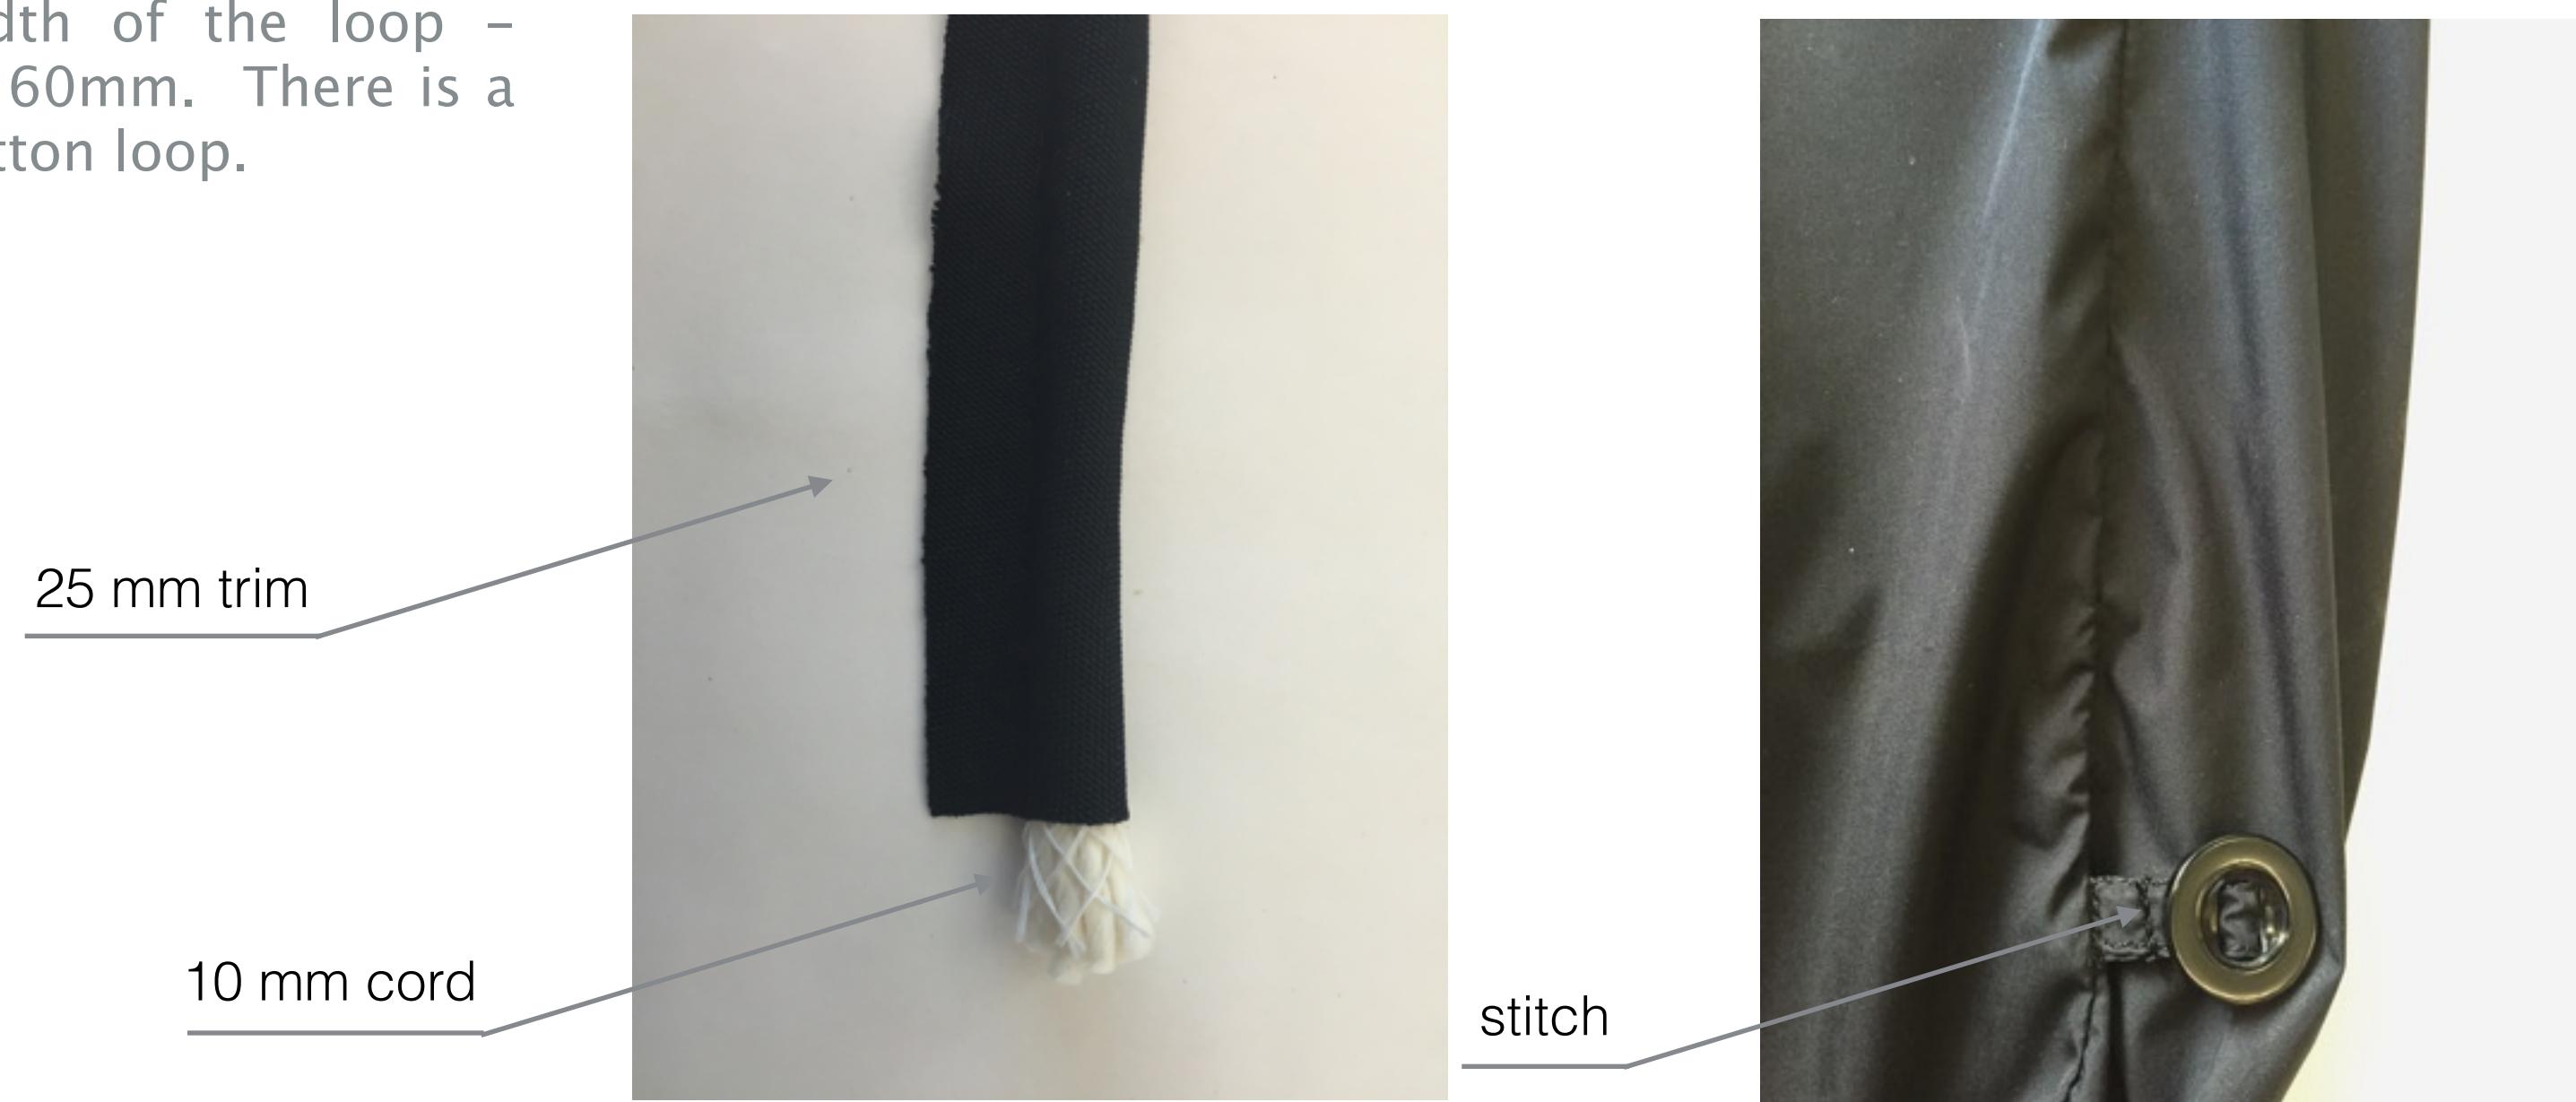

Overview - Connection Bag, Changing Mat and Shoulder Straps

- 1. Folding Changing Mat** – is attached to the bag only the upper edge.
- 2. Connection** – bag and changing mat are connected by folded detail
- 3. Shoulder Straps** are attached to the folded
- 4. There are two parallel stitches** on the folded detail for reinforcement.
- 5. Nylon Cutting** – All nylon webbing cuts shall be made to prevent unraveling. Normal commercial practices shall be used here.

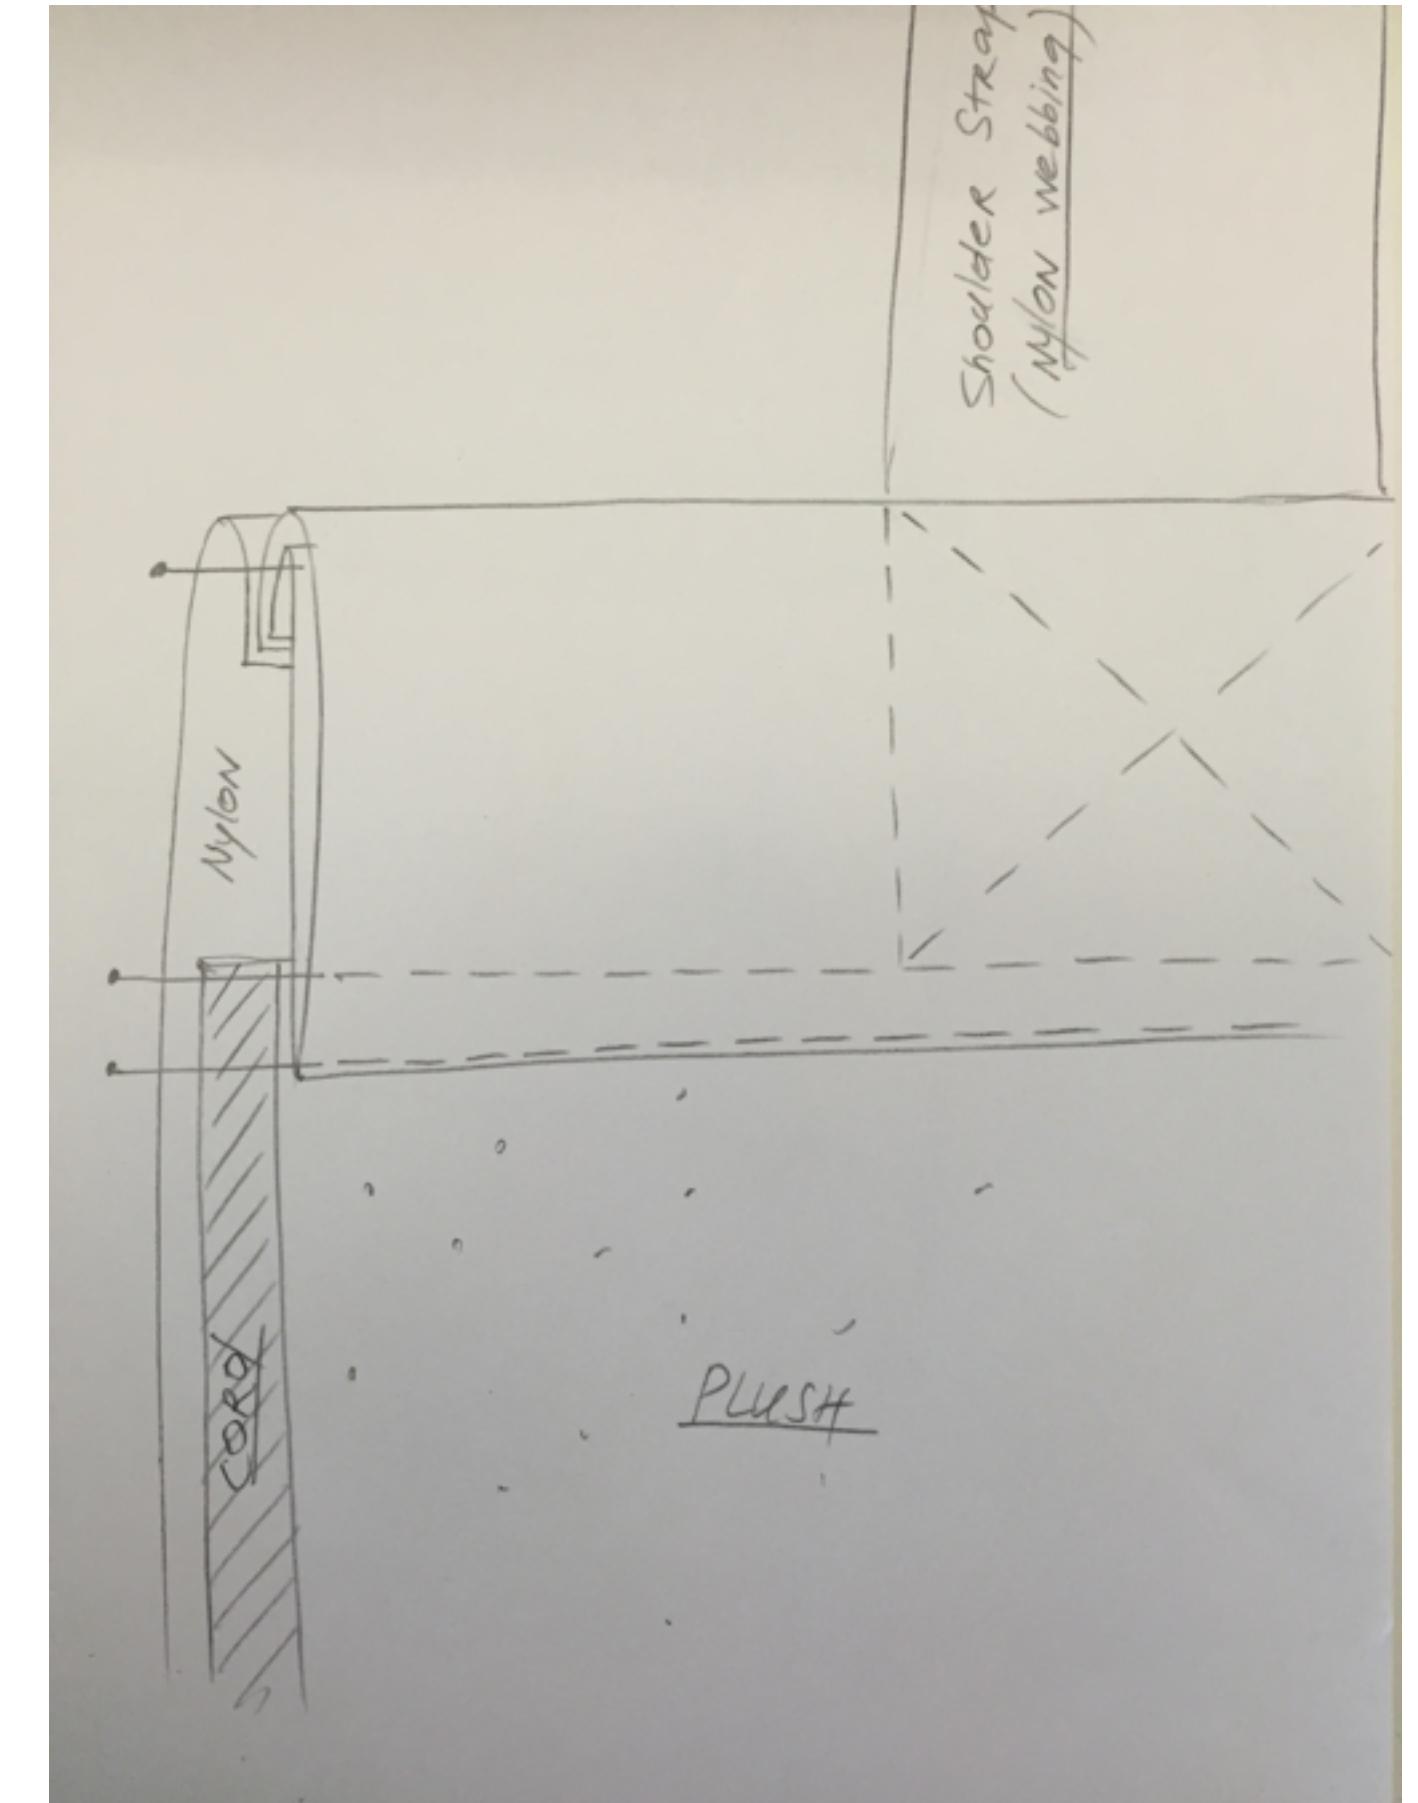

Overview - Outside and Inside Strap Attach

1. Shoulder Strap
2"x24.5" Nylon webbing.

2. Shoulder strap shall be attached so the handle lays as show in the picture of the Logo attachment slide.



Overview - Inside of Changing Bag

Panel Joining. Factory to determine optimum method for joining the panels. The sample show uses surged seams, but we are open to other methods as long they are of high quality (for exp. as show on the right photo)



Logo Design and Placement

1. Woven Logo Design

The final artwork shall be provided in a separate artwork file.

2. Logo Construction

Logo shall be a woven flag style that is folded over.

3. Logo Attachment

The label shall be folded and sewn into the seam so that it hangs out like a flag. See mock up for approximate look and attachment position

4. Logo Size

The size of the exposed portion of the logo is 30mm square.

