

PACIFIC INTEGRATED HANDLING SYSTEMS DIVISION

10215 PORTLAND AVENUE, TACOMA, WA, 98445, US

17/03/2025

Ref. Offer No.: QLI-00051890 for MODULA®LIFT NG VLM, Model ML25

Hello Josh Jancola

MODULA® appreciates the opportunity to provide you with our MODULA®LIFT Vertical Lift Modules for your application requirements.

We feel that our products stand far and beyond any other equipment on the market and we offer the most manufacturing flexibility, unit options and superior unit design for all your present and future needs.

Within this detailed technical offer, you will find our solution based upon your application requirements.

Our solution is based on	1.00 MODULA®LIFT VLM(s),	
	Model:	ML25
	Height:	145.67 in
	Number of trays:	22 pcs
	Storage Volume:	363.6 ft³
	Storage Area:	634.66 ft²
	Unit Footprint:	124.28 ft²

Within this detailed technical offer, you will also find an in-depth description of MODULA®VLM technology as well as our MODULA®WMS Software, both of which are specifically designed to optimize and maximize the storage and retrieval processes within your operation.

Please feel free to contact me if you have any questions or whenever we can be of further assistance.
Best Regards,

Josh Jancola

Unknown

MODULA®Inc.

MODULA®LIFT VLM specifications

Unit information:	MODULA®LIFT VLM Model:		ML25 – 3700			
Unit dimensions:	Unit height:		145.67	in.	3700	mm
	Unit width:		177.83	in.	4517	mm
	Unit depth:		100.63	in.	2556	mm
	Required clear ceiling height:		Unit Height, Plus 3.94 in. (100 mm)			
Trays:	Trays included per unit:		22			
	Tray sidewall type:		Slotted		Tray side walls	
	Usable tray width:		161.41	in.	4,100	mm
	Usable tray depth:		25.75	in.	654	mm
	Tray side wall height:		4.72	in.	120	mm
	Tray storage adjustability:		0.98	in.	25	mm
Loads / Unit capacities:	Max. tray load capacity:		551	lbs.	250	kg.
	Total max. machine weight as configured:		20557	lbs.	9323	kg.
	Net unit load capacity (as configured): (No. trays included x max. tray load capacity)		12,125	lbs.	5,500	kg.
	Empty unit weight w/ 22	Empty trays:	8,428	lbs.	3823	kg.
	Empty tray weight (per tray):		186.29	lbs.	84.50	kg.
Power requirements:	Total installed power consumption:		7.6	kW		
	Power supply required:		400-480	V AC / 3~ / 60 Hz / w/o Neutral		
	Amperage draw / breaker size required:		12	Amp		
Customizations:	RAL grey:		☐			
	Flat panels:		☐			

PICKING BAY CONFIGURATION (PER UNIT):

Delivery locations:	Bay location:	Picking bay type:		Tray delivery heights:			
First:	Front	Internal		27.56	in.	700.00	mm
		Single	Delivery	0.00		0.00	
Second:				0.00	in.	0.00	mm
			Delivery	0.00		0.00	
Third:				0.00	in.	0.00	mm
			Delivery	0.00		0.00	

TRAY CONFIGURATIONS (PER UNIT):

Trays:			Usable height per tray:		Tray quantities:			Square area stored (ft ²)		Cubic Vol. stored (ft ³)	
					Max. qty.	Actual qty.	Qty. slotted	Max.	Offered	Max.	Offered
4.72	in.	Sidewalls	4.72	in.	7	7	7	201.94	201.94	79.51	79.51
4.72	in.	Sidewalls	6.69	in.	6	6	6	173.09	173.09	96.47	96.47
4.72	in.	Sidewalls	8.66	in.	9	9	9	259.63	259.63	187.63	187.63
	in.	Sidewalls		in.	0	0	0	0.00	0.00		0.00
	in.	Sidewalls		in.	0	0	0		0		0.00
	in.	Sidewalls		in.	0	0	0	0.00	0.00		0.00
TOTAL per unit:					22	22	22	634.66	634.66	363.6	363.65


UNIT PERFORMANCE AS CONFIGURED (PER UNIT):

		No Load:	Full Load:
Average tray delivery time:		18 sec.	21 sec.
Maximum tray delivery time:		22 sec.	25 sec.
Number of trays delivered per hour:	Picking time = 0 sec.	98	87
	Picking time = 15 sec.	70	64
	Picking time = 30 sec.	54	51


Modula Lift ML25 Specifications

Unit Dimensions

Modula Lift Model ML25 with Internal Bay Work Station

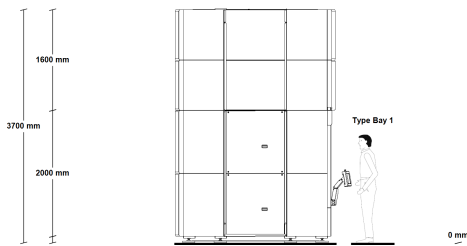


	Inches	mm
Unit Height:	145.67	3,700
Unit Width:	177.83	4,517
Unit Depth:	100.63	2,556
Floor Level Bay 1:	0.00	0
Floor Level Bay 2:	N/A	N/A
Floor Level Bay 3:	N/A	N/A



Power Requirements:

Total Installed Power Consumption:	6,5	kW
Power Supply Required:	208	V AC / 3~
Frequency:	50/60	Hz (w/o) Neutral
Main Power Disconnect Switch Type / Sizing:	300	mA - Class B Differential Switch

Modula Lift Weights and Loads

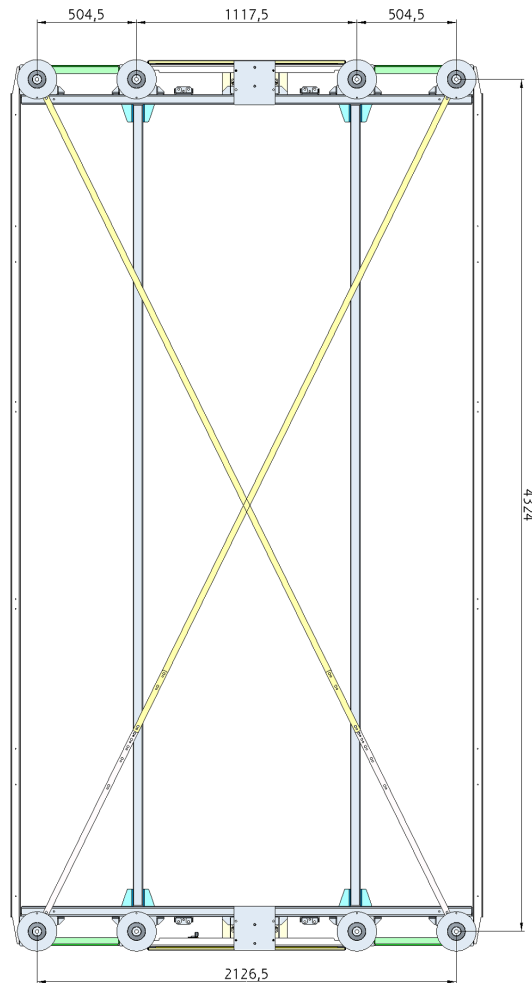

Machine structure weight, empty	1964	kg	4331	lbs
Weight of 22 trays, empty	1859	kg	4099	lbs
Weight of machine structure + 22 empty tray	3823	kg	8430	lbs
Maximum net payload capacity per tray	250	kg	551	lbs
Total net payload capacity with 22 trays	5500	kg	12128	lbs
Total maximum weight of machine as configured	9323	kg	20557	lbs
Floor area of machine	11,55	m ²	124.32	ft ²
Machine area average floor loading as configured	807	kg/m ²	165	lbs/ft ²
Surface area of each base plate	969,98	cm ²	150.35	in ²
Number of machine base plates	8	nr	8	ea
Base plate surface pressure as configured	1,20	kg/cm ²	17.09	lbs/in

System Investment

[illegible]

		INCLUDED
		INCLUDED
Standard Parts & Labor Unit Warranty (2 Years):	1 (Lot)	INCLUDED
Transportation & Delivery To End User's Location:	1 (Lot)	NOT INCLUDED
Unit Unloading At End User's Loading Dock Location:	1 (Lot)	INCLUDED
Non-Union, Non-Prevailing Wage Mechanical Installation and Training:	1 (Lot)	NOT INCLUDED
Final Electrical Connection To End User's Supplied Power Disconnect Location:	1 (Lot)	By End User
All Required Equipment Rentals For Unit Unloading:	1 (Lot)	NOT INCLUDED
All Required Equipment Rentals For Unit Installation:	1 (Lot)	NOT INCLUDED
Clean Up and Debris Disposal To End User Supplied Dumpster:	1 (Lot)	INCLUDED
Final Debris Removal:	1 (Lot)	NOT INCLUDED
	1 (Lot)	INCLUDED
TOTAL INVESTMENT:		\$ 96332.455972

NOTE: Pricing does not include taxes, or any necessary permitting unless specified. Seismic installations may require floor modifications to the customer's facility, which will be the responsibility of the customer or their contractor.

Installation of the machine does not include installing slotted walls, partitions and dividers to the trays. These need to be installed by the customer.

Unit packaging (per unit)

No. of trucks: 1

Payment Plan

Upon Order Confirmation:	30%
Upon Delivery:	60%
After Commissioning:	10%
Monthly Interest Rate:	0,5

[illegible]



		\$
		\$ Pagina 9
		\$
		\$
		\$

NOTE: Pricing does not include taxes, or any necessary permitting unless specified.