

Ethanol Blending in Gasoline – Estonia


September 2025



**U.S. GRAINS &
BIOPRODUCTS
COUNCIL**

20 F St. NW, Suite 900 \ Washington, DC 20001
202-789-0789 \ www.grains.org

FARO90




www.faro90.com
+52 55 6122 2255

Ethanol Blending in Europe


There are important fuel quality and environmental impact of vehicle emission challenges in the Region.

- The use of ethanol improves gasoline quality and creates flexibility in gasoline production.
- Ethanol use is a cost-effective way to increase gasoline octane and to replace more expensive gasoline components.
- Ethanol contributes to transport decarbonization and air quality improvement.
- There are opportunities across Europe to increase the ethanol blend level and implement new policies on the use of gasoline-ethanol blends.

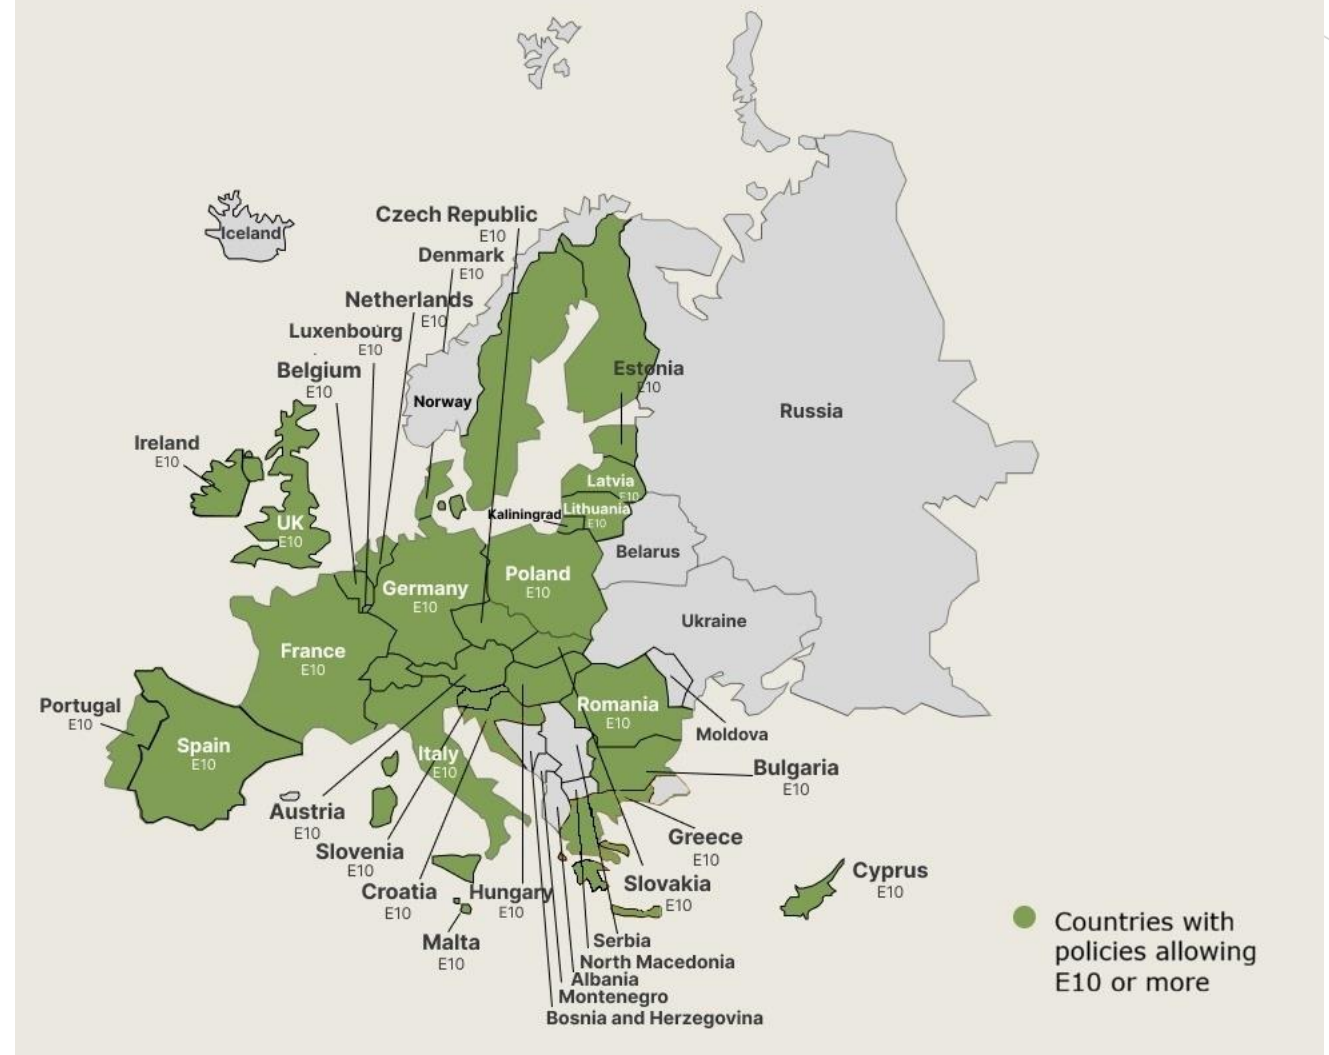

Twenty eight countries with potential and additional use of ethanol were studied: 1) Gasoline market profiles; 2) Optimization of gasoline blends with ethanol and, 3) Environmental impact of gasolines blended with ethanol.

Ethanol Gasoline Blending in Estonia

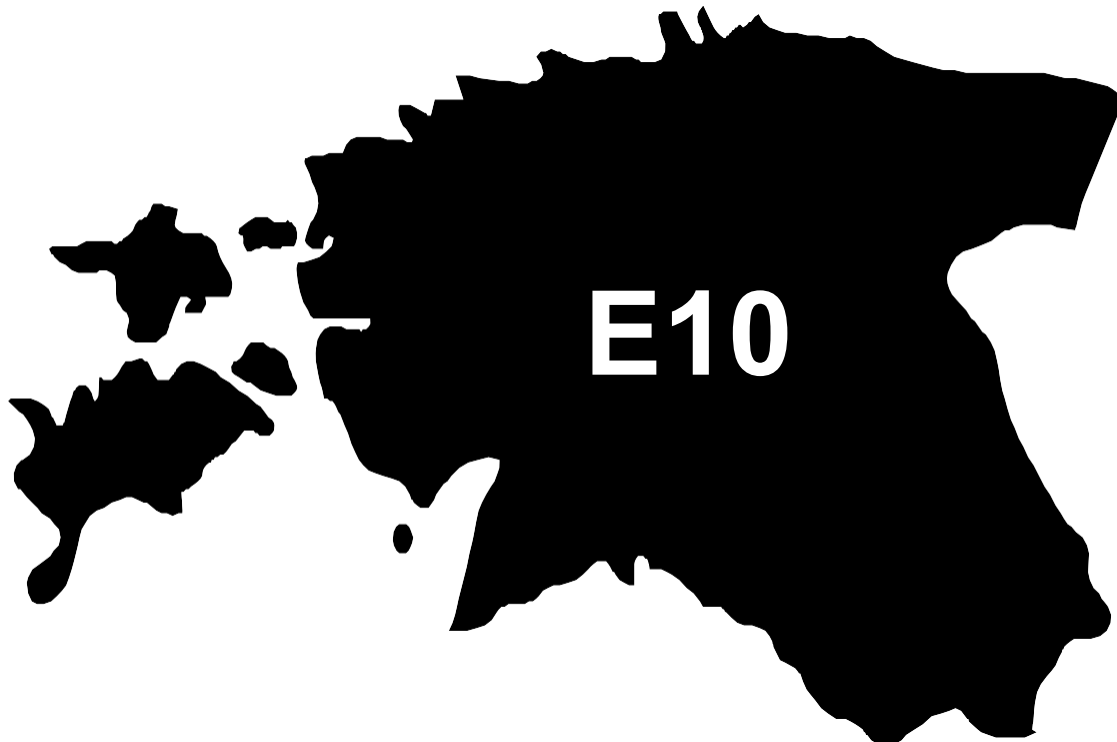


In 2024, gasoline consumption in Estonia was 267 million liters (71 million gallons) and growth rate was -1.8%. There is no gasoline production. Gasoline net imports were 267 million liters (70 million gallons). Estonia complies with the European gasoline standards and offers two main grades: RON 95 and RON 98 with an average octane of 96.2 RON.


In 2024, ethanol consumption in Estonia was 5 million liters (1 million gallons) representing 1.8% of gasoline demand. Ethanol imports were 5 million liters (1 million gallons). Ethanol sources is Cereals 100%.

Source: Eurostat, European Commission

Gasoline Demand in Estonia

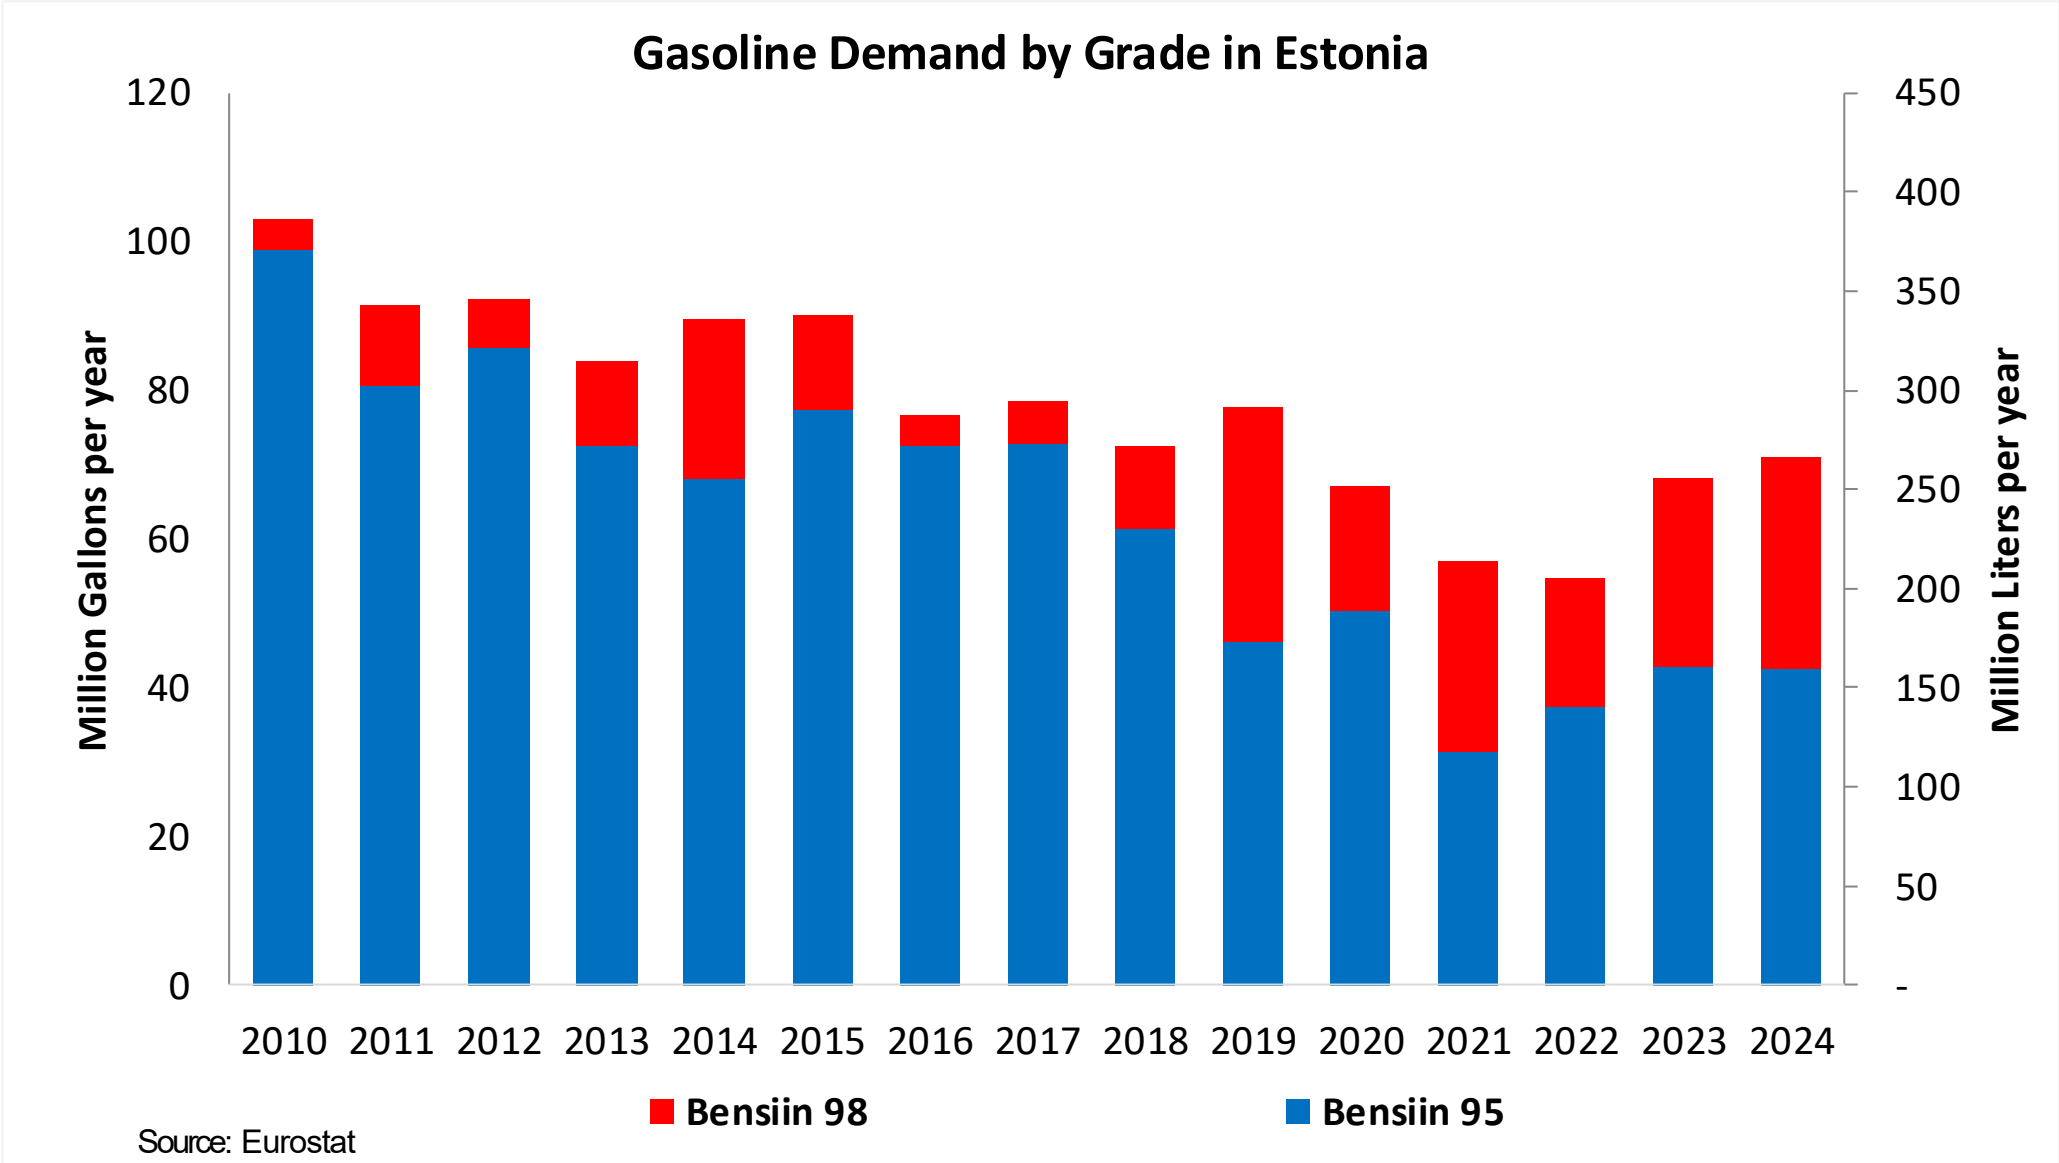


Gasoline Imports in Estonia

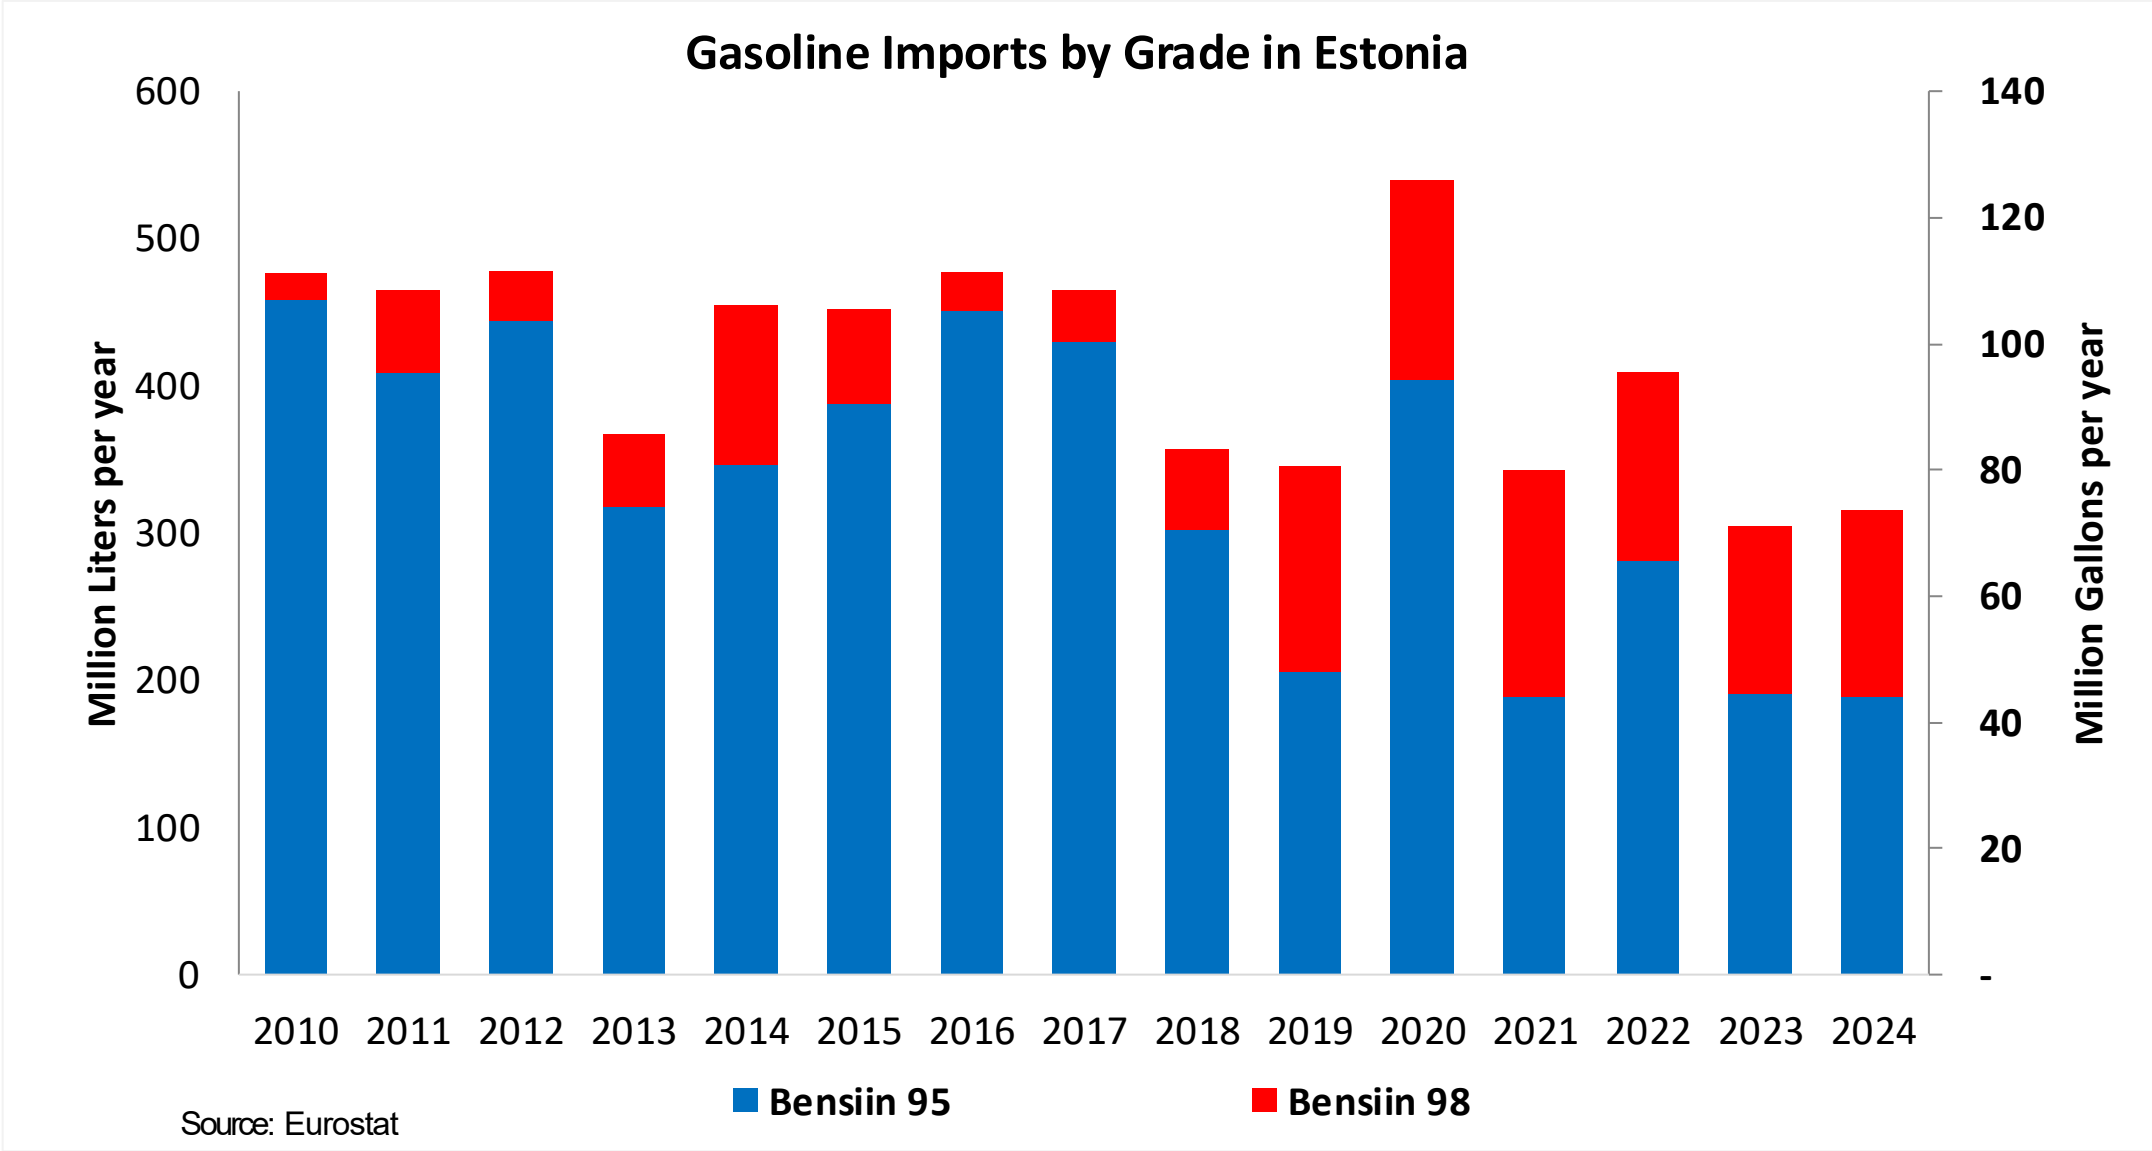


The FARO90 logo is shown in a blue box, followed by a chemical structure diagram of a substituted cyclohexene derivative. The structure features a six-membered ring with a double bond. Substituents include a methyl group, a propyl group, and a side chain containing a carbonyl group and a methyl group. The letters H, C, and X are highlighted in orange on the structure.



Ethanol Balance in Estonia




Ethanol Demand in Estonia

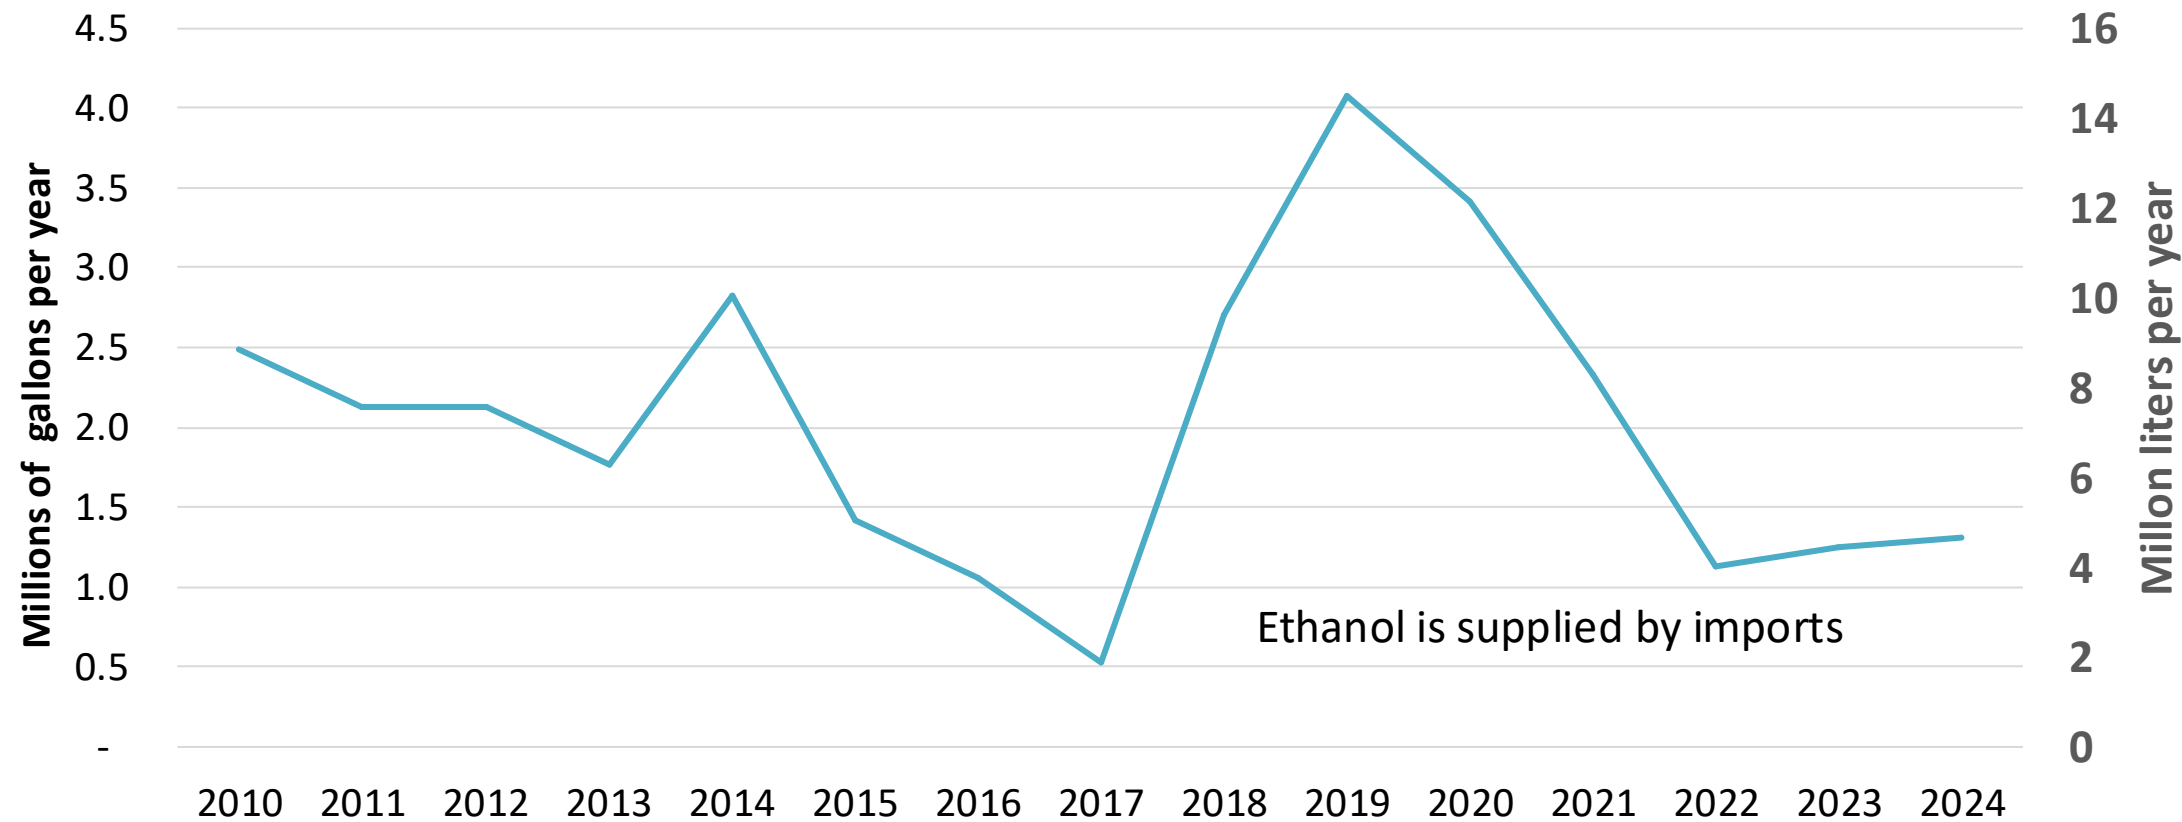

Source: Eurostat, Statistics Estonia

Gasoline Quality in Estonia



Name	EN 228:2025 (Euro 6); Country Level Fuel Ordinances							
Implementation Date	2025							
Applicability	All EU Contries + UK							
Grade	RON 95 E5		RON 95 E10		RON 98 E5		RON 98 E10	
	Min	Max	Min	Max	Min	Max	Min	Max
RON	95.0		95.0		98.0		98.0	
MON	> 85	> 88	> 85	> 88	> 85	> 88	> 85	> 88
AKI								
Benzene (%vol)	< 1							
Aromatics (% vol)	< 35							
Olefins (%vol)	< 18							
Lead (g/L)	< 0.005							
Manganese (mg/L)	< 2,0							
Sulfur (ppm)	10.0							
Oxygen (%w)*	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7
Ethanol (%vol)	< 5	< 10	< 5	< 10	< 5	< 10	< 5	< 10
PVR 37.8°C (psi)	<> 45 - 100 kPa in 6 Volatility Classes							
Overall Biofuels (%cal)	7.5							
Advanced Biofuels (%cal)	0.5							
Bioethanol in Gasoline Sales (%cal)	-							
GHG Emission Reduction (%)	-							

* Methanol 3%, Iso-propyl alcohol 12%, Ter-butyl alcohol 15%, Iso-butyl alcohol 15%, Ethers +5 Carbons 22%, Other Oxygenates 15%

Source: European Commision

The FARO90 logo is shown in a blue box, followed by a chemical structure diagram of a substituted cyclohexene derivative. The structure features a six-membered ring with a double bond. Substituents include a methyl group, a propyl group, and a side chain containing a carbonyl group and a methyl group. The letters H, C, and X are highlighted in orange on the structure.

Catalytic Gasoline
Light Primary Naphta
Heavy Primary Naphta
Reformate
Isopentane
Alkylate
Isomerate
Hydrocracked Gasoline
Coker Naphta
n-Butane
MTBE
ETBE
TAME
Aromatics

Country	Threat Category 1 (Dark Blue)	Threat Category 2 (Red)	Threat Category 3 (Grey)	Threat Category 4 (Purple)	Threat Category 5 (Light Grey)	Threat Category 6 (Orange)	Threat Category 7 (Yellow)	Threat Category 8 (Brown)	Threat Category 9 (Dark Blue)	Threat Category 10 (Light Yellow)	Threat Category 11 (Dark Purple)	Threat Category 12 (Dark Blue)
Austria	15%	15%	15%	15%	10%	10%	10%	10%	5%	5%	5%	5%
Belgium	18%	18%	18%	18%	10%	10%	10%	10%	5%	5%	5%	5%
Bulgaria	10%	10%	15%	20%	10%	10%	10%	10%	10%	5%	5%	5%
Croatia	15%	15%	15%	20%	10%	10%	10%	10%	10%	5%	5%	5%
Cyprus	15%	15%	15%	20%	10%	10%	10%	10%	5%	5%	5%	5%
Czechia	10%	10%	15%	20%	10%	10%	10%	10%	10%	5%	5%	5%
Denmark	15%	15%	15%	18%	10%	10%	10%	10%	5%	5%	5%	5%
Estonia	10%	10%	15%	20%	10%	10%	10%	10%	10%	5%	5%	5%
Finland	10%	10%	15%	20%	10%	10%	10%	10%	10%	5%	5%	5%
France	20%	20%	20%	18%	5%	5%	5%	5%	5%	5%	5%	5%
Germany	15%	15%	15%	18%	10%	10%	10%	10%	5%	5%	5%	5%
Greece	15%	15%	15%	20%	10%	10%	10%	10%	5%	5%	5%	5%
Hungary	12%	18%	15%	15%	5%	5%	5%	10%	10%	5%	5%	5%
Ireland	5%	15%	15%	25%	5%	10%	10%	5%	10%	10%	5%	5%
Italy	15%	15%	15%	20%	5%	5%	5%	10%	10%	5%	5%	5%
Latvia	10%	10%	15%	20%	10%	10%	10%	10%	10%	5%	5%	5%
Lithuania	10%	10%	15%	20%	10%	10%	10%	10%	10%	5%	5%	5%
Luxembourg	15%	15%	15%	18%	10%	10%	10%	10%	5%	5%	5%	5%
Malta	15%	15%	15%	20%	5%	5%	5%	10%	10%	5%	5%	5%
Netherlands	18%	18%	18%	18%	5%	10%	10%	10%	5%	5%	5%	5%
Poland	10%	10%	15%	20%	10%	10%	10%	10%	10%	5%	5%	5%
Portugal	15%	15%	15%	18%	5%	5%	5%	10%	10%	5%	5%	5%
Romania	10%	10%	15%	20%	10%	10%	10%	10%	10%	5%	5%	5%
Slovakia	10%	10%	15%	20%	10%	10%	10%	10%	10%	5%	5%	5%
Slovenia	15%	15%	15%	18%	10%	10%	10%	10%	5%	5%	5%	5%
Spain	15%	15%	15%	20%	5%	5%	5%	10%	10%	5%	5%	5%
Sweden	15%	15%	15%	18%	10%	10%	10%	10%	5%	5%	5%	5%
UK	5%	15%	15%	20%	5%	10%	10%	5%	10%	10%	5%	5%


Gasoline Blending Optimization

In some parts of the world, ethanol is added to gasoline as a blending component. The advantages of ethanol include that it is a renewable fuel made of biomass; that it is an octane booster that helps to dilute sulfur; and that it allows the fulfillment of environmental objectives. To determine the optimal components to be blended with ethanol, a **blending model** was used. This model selects the components to add in the gasoline/ethanol blend based on:



- Components prices,
- Properties each component affects,
- Quality parameters by country, and
- Component availability by country.

Through iterations, the model obtains the %v/v of the components to be blended with 10%, 15%, 20%, 25% and 30% of ethanol, in such a way that the final blend complies with the required properties of a finished gasoline by country.


The blending model uses gasoline component spot average prices 2024 and provides fuel prices that do not include country distribution costs, local taxes and subsidies and import or gas station margins.

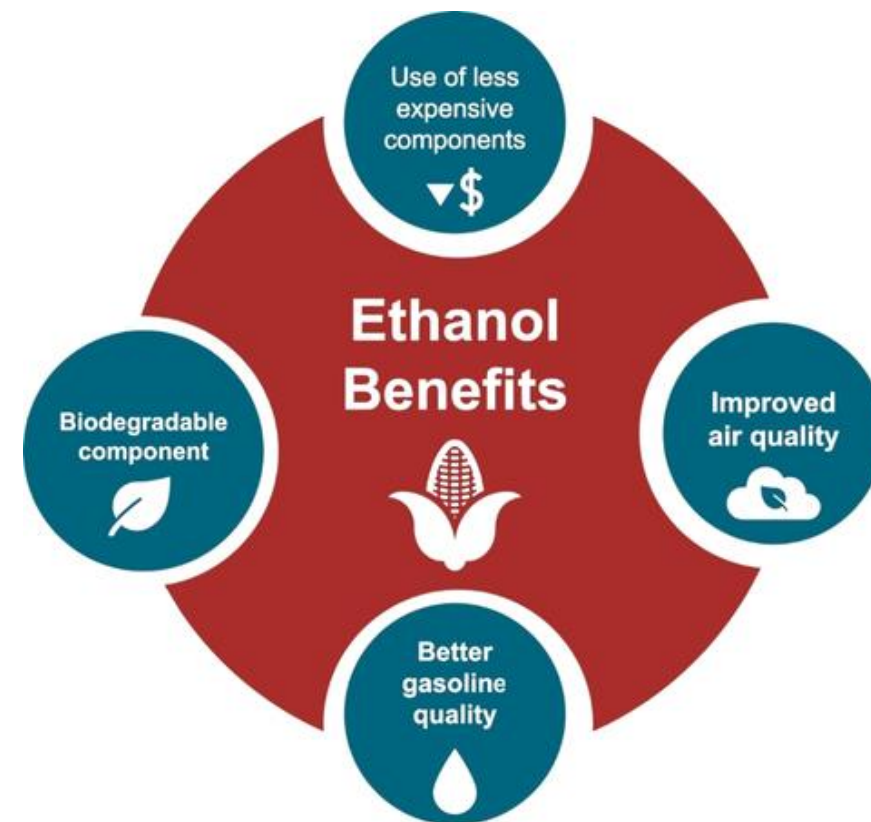

Estonia Available Blending Components

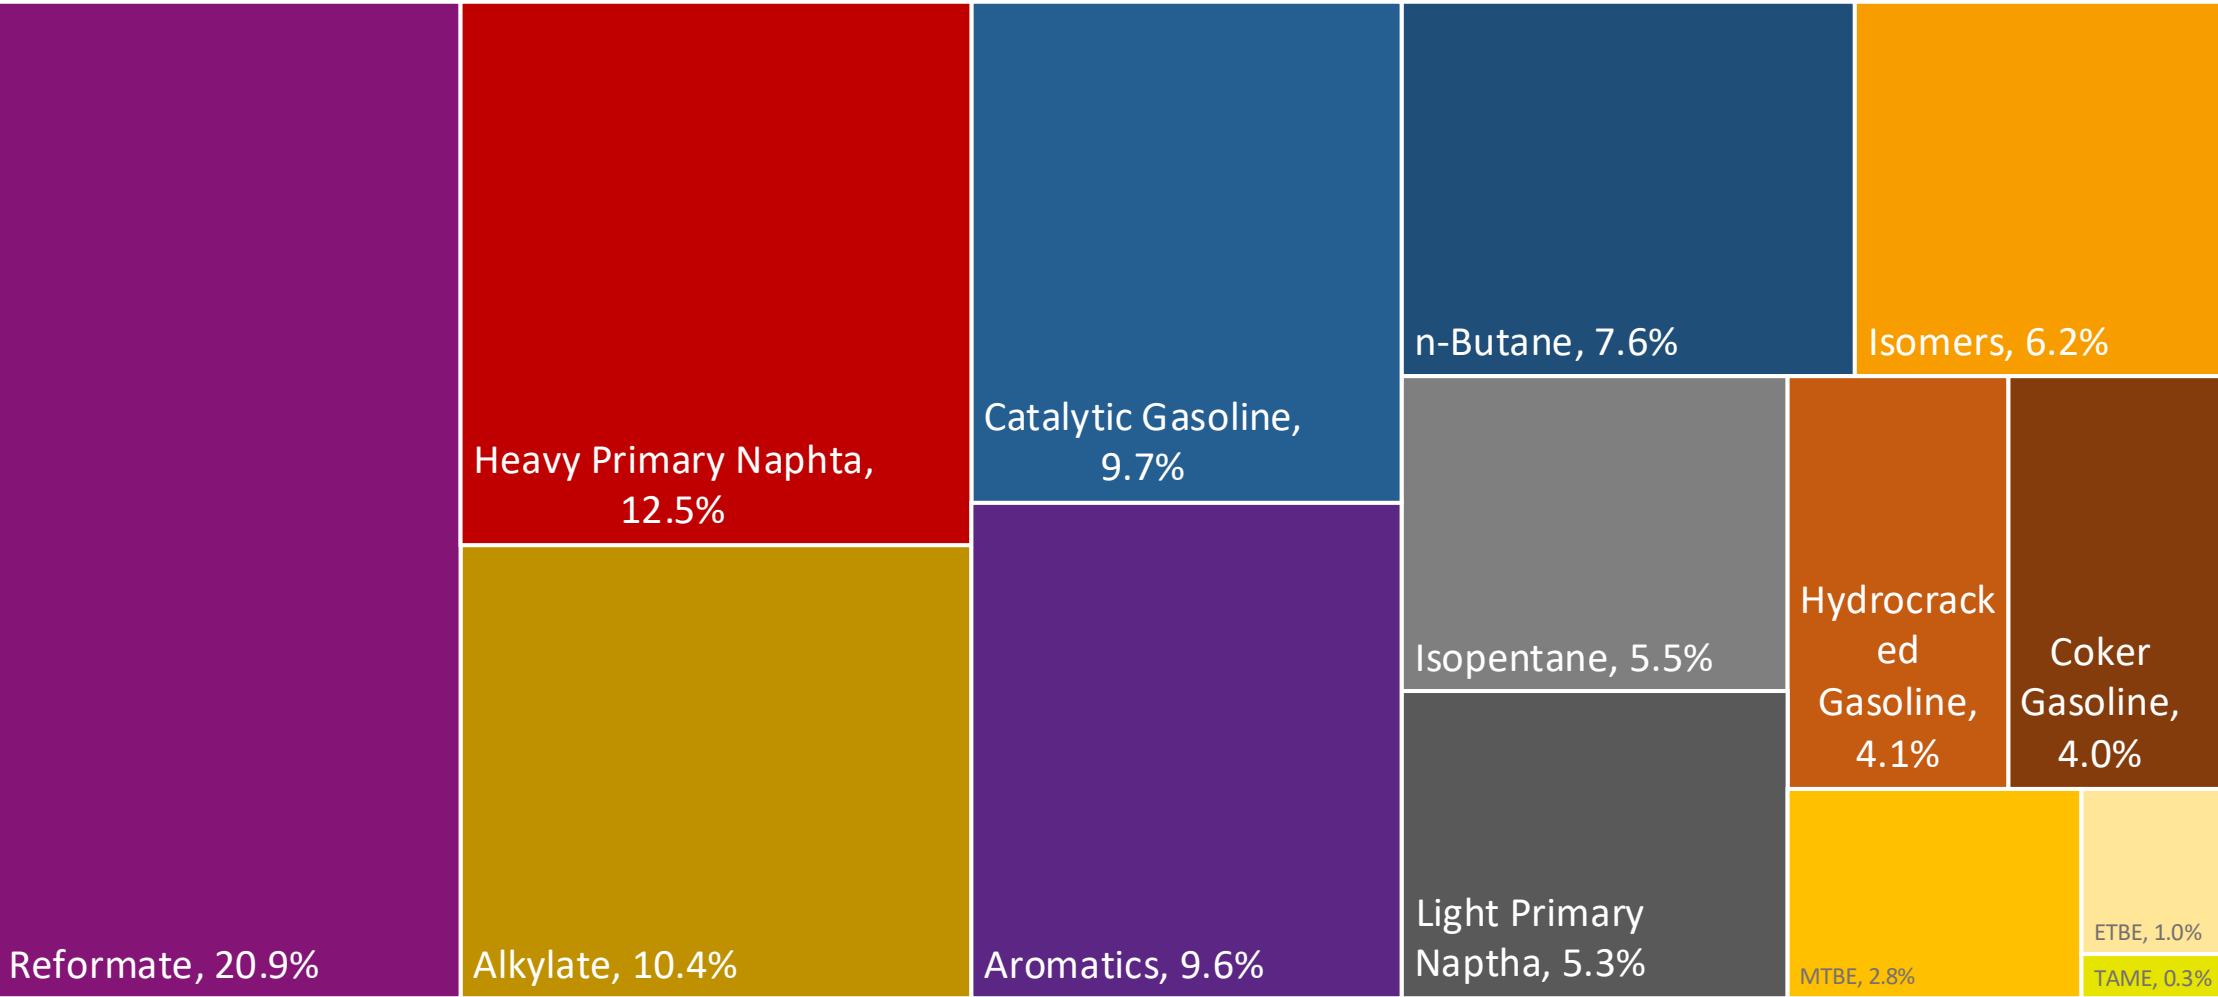

Estonia – Gasoline 95 – Constant Octane

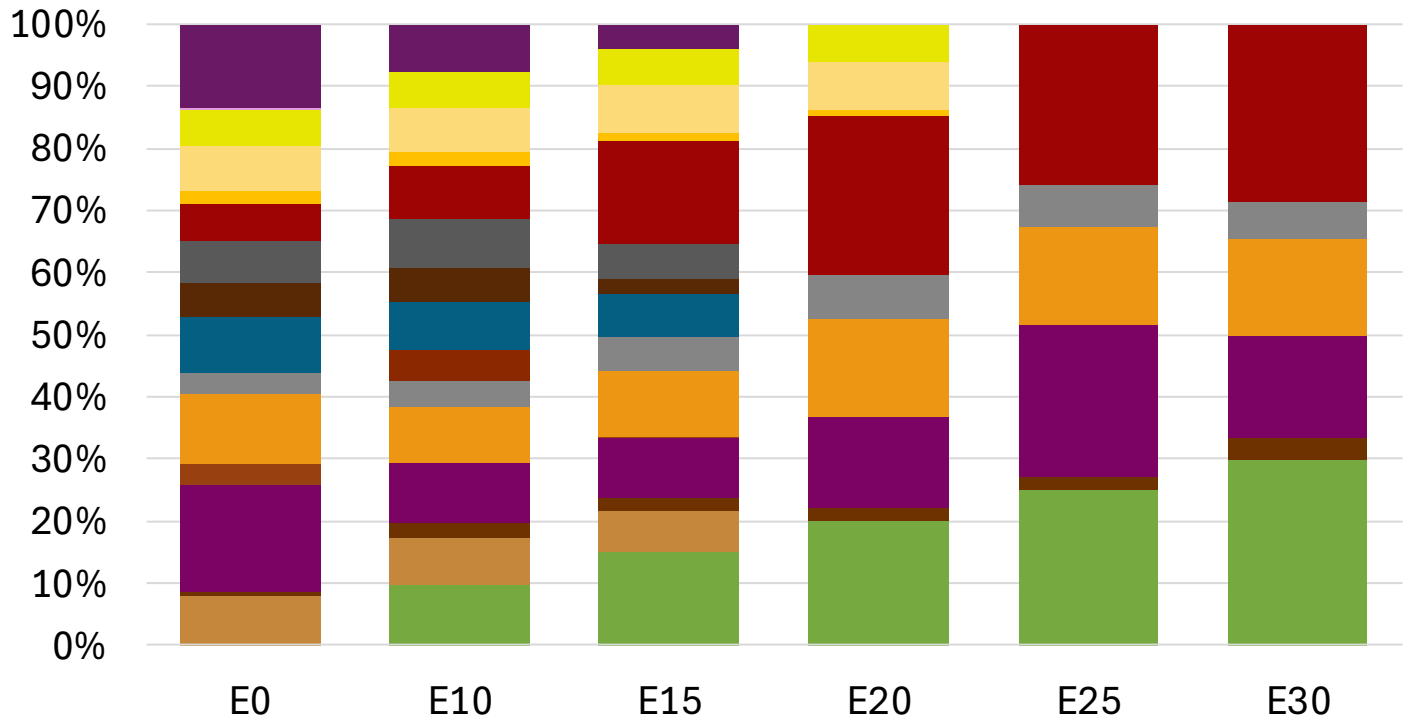


Average CIF 2024
Prices

Octane (RON)	95.0	95.0	95.0	95.0	95.0	95.8
Price (US\$/gal)	\$ 2.274	\$ 2.136	\$ 2.036	\$ 1.921	\$ 1.875	\$ 1.822

Source: Faro90


Estonia - Gasoline 98 - Constant Octane

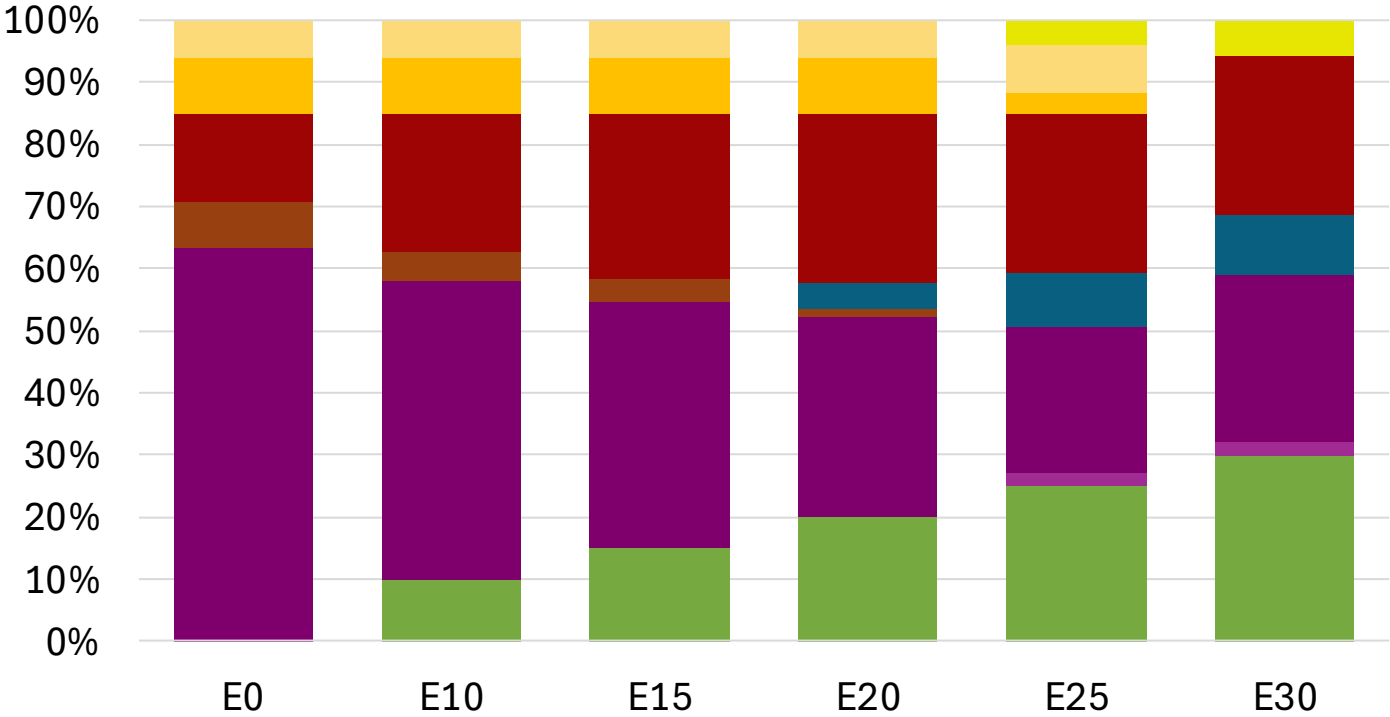

Average CIF 2024
Prices

Octane (RON)	98.0	98.0	98.0	98.0	98.0	98.0
Price (US\$/gal)	\$ 2.294	\$ 2.177	\$ 2.108	\$ 2.036	\$ 1.971	\$ 1.921

Estonia – Gasoline 95 – Increased Octane


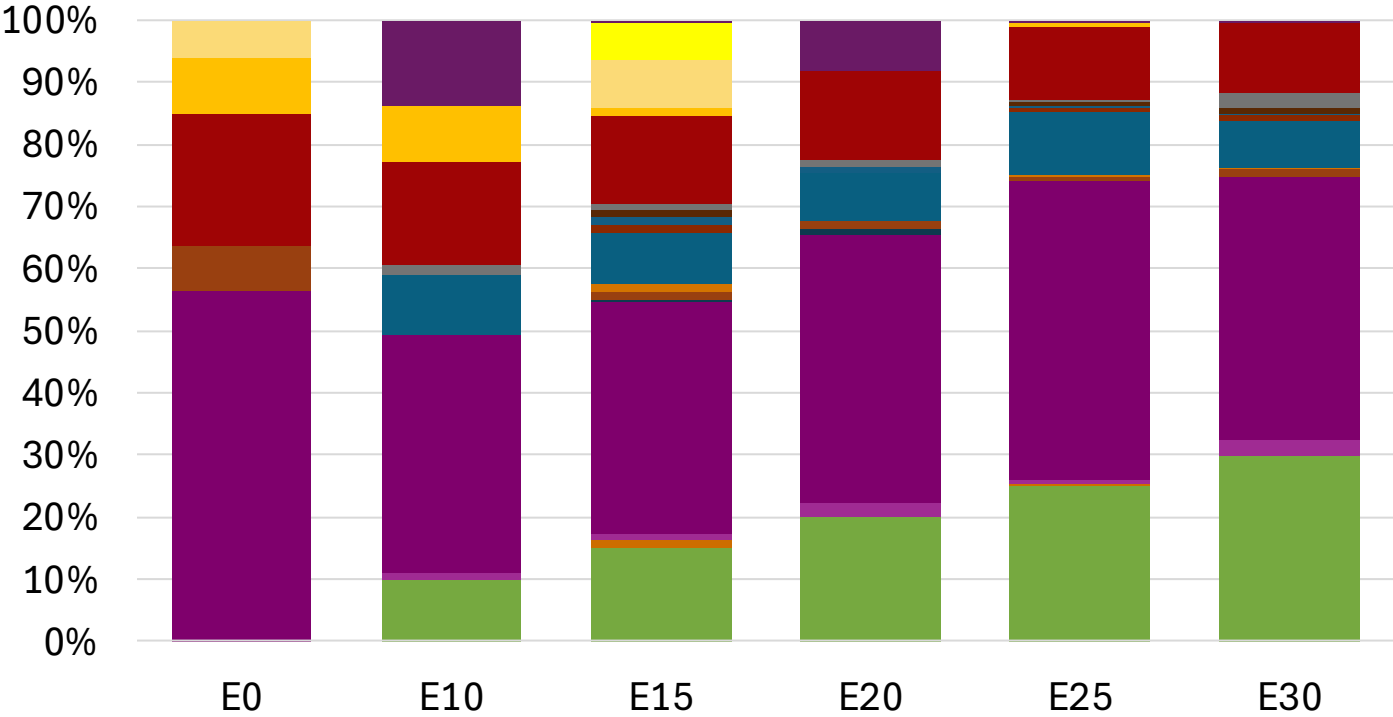


Average CIF 2024
Prices

Octane (RON)	95.0	96.2	98.3	98.7	100.5	101.8
Price (US\$/gal)	\$ 2.162	\$ 2.162	\$ 2.162	\$ 2.162	\$ 2.162	\$ 2.162

Source: Faro90

Estonia – Gasoline 98 – Increased Octane

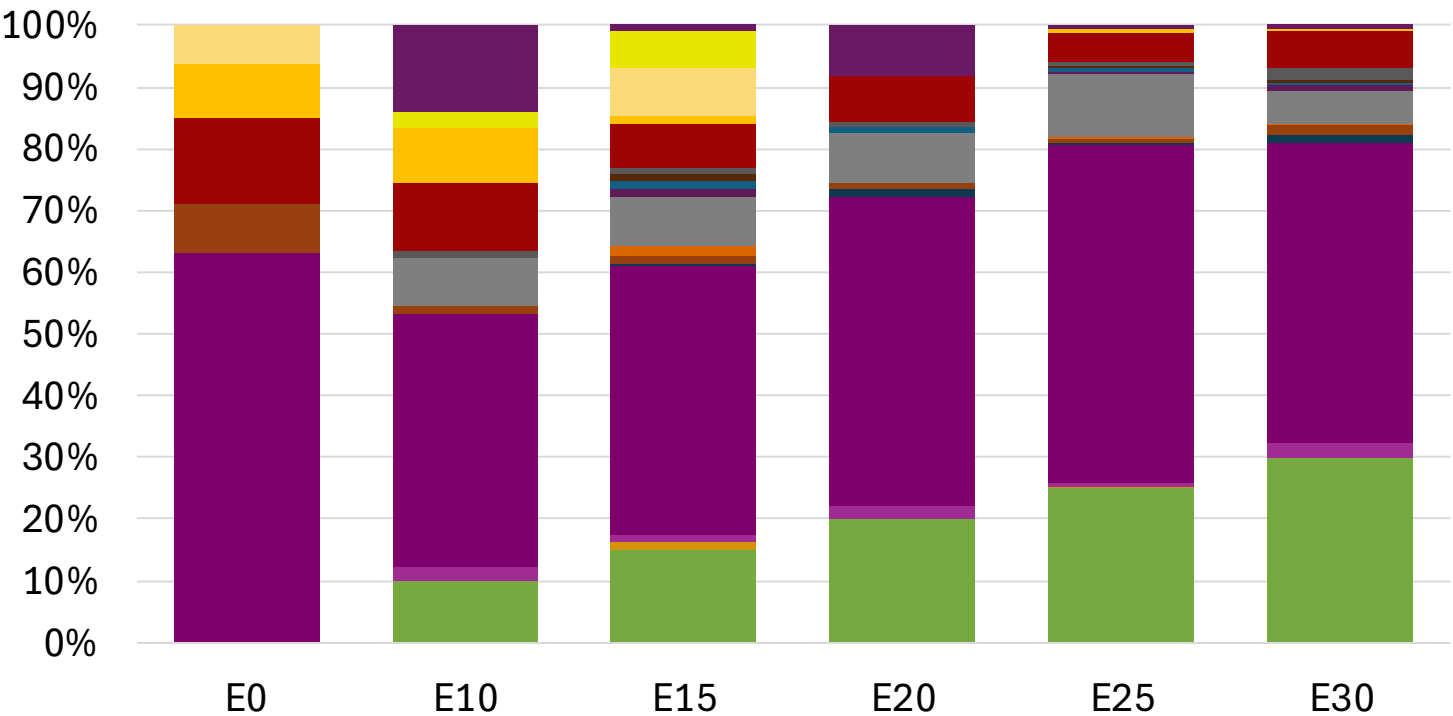

Average CIF 2024
Prices

Octane (RON)	98.0	99.0	100.9	101.2	102.8	104.1
Price (US\$/gal)	\$ 2.294	\$ 2.294	\$ 2.294	\$ 2.294	\$ 2.294	\$ 2.294

Source: Faro90

Vehicle Emission Impact for Ethanol Gasoline Blending

The model used in this analysis takes as a reference the [International Vehicle Emissions Model \(IVE\)](#).

The model uses the Base Emission Rates from IVE model, as well as its Adjustment Factors based on:


- Vehicle technology (cars, trucks, buses, motorcycles),
- Vehicle fleet average age,
- Average traveled distance per vehicle by country, as well as
- Geographical and climatic conditions (altitude, humidity, temperature).

Emissions of criteria pollutants, toxic pollutants, and greenhouse gases (GHG) were calculated and calibrated with emission inventories, using real gasoline quality data. The reduction rates for gasoline/ethanol blends were obtained from various sources (IPCC, US Grains, among others).


Emission estimations for different pollutants for gasoline and gasoline/ethanol blends (10%, 15%, 20%, 25% and 30% ethanol) were determined using the IVE Model. A comparison between the results and the European (Euro 6) requirements is made. Results are also compared with real emissions of the United States vehicle fleet*.

*Source: Bureau of transportation statistics.

Main Results

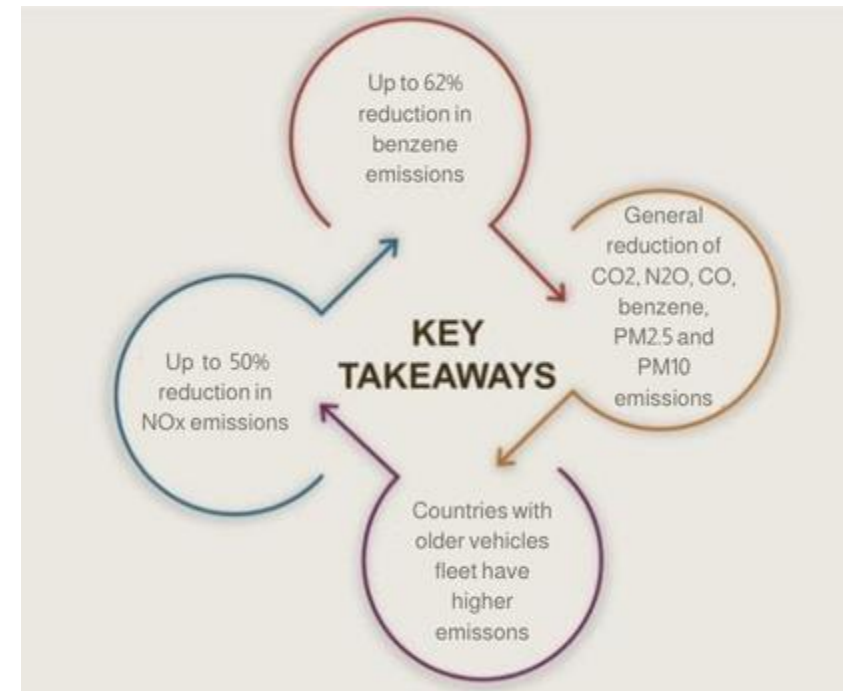

Gasoline Vehicle Fleet - Estonia







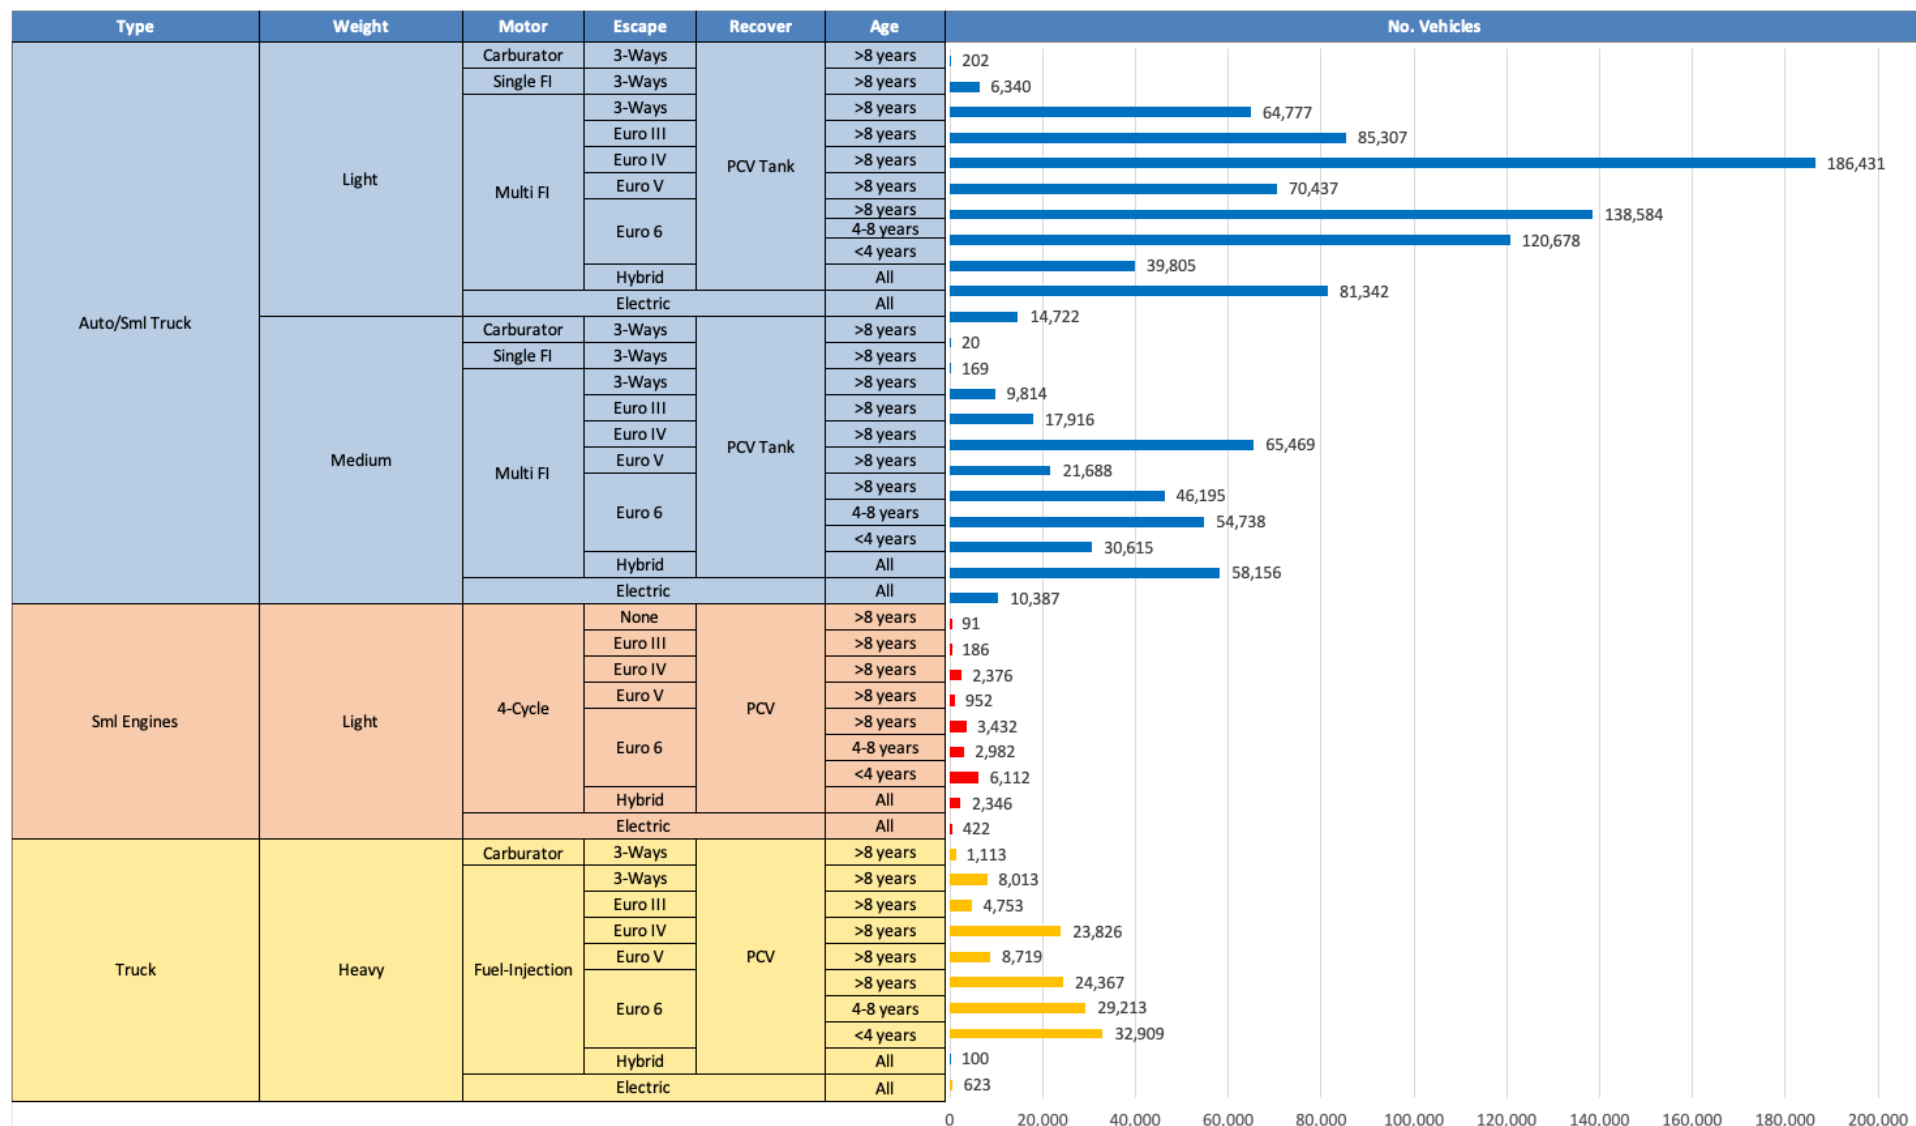


Vehicle Fleet: 1,276,323
Gasoline Vehicle Fleet: 616,792

Source: Eurostat, ACEA

Estonia – Vehicular Emissions

TIER III BIN 125 United States
Euro 6 Standard

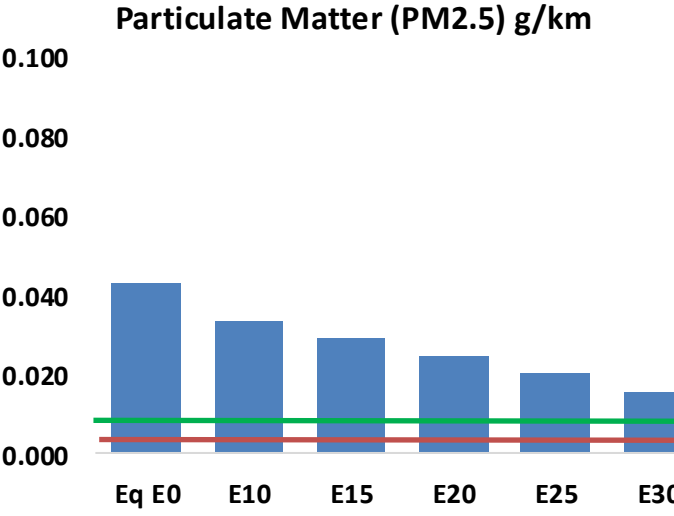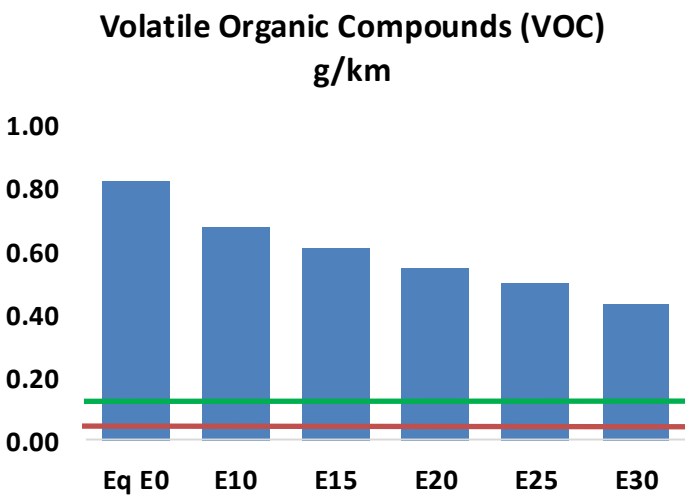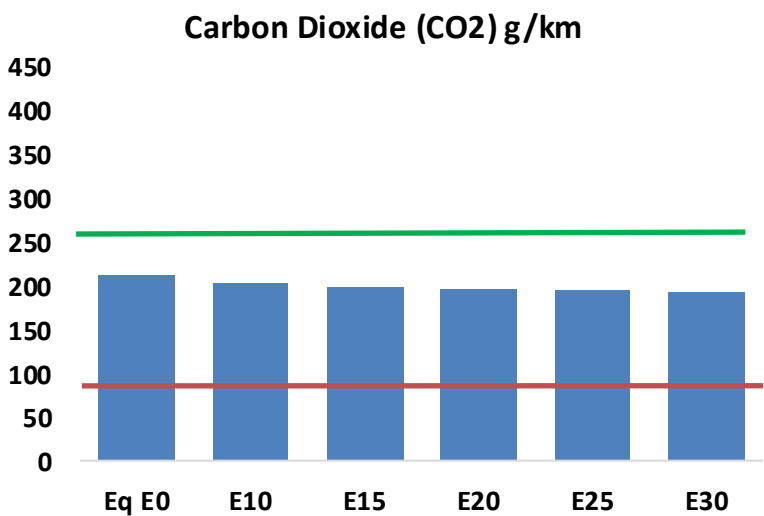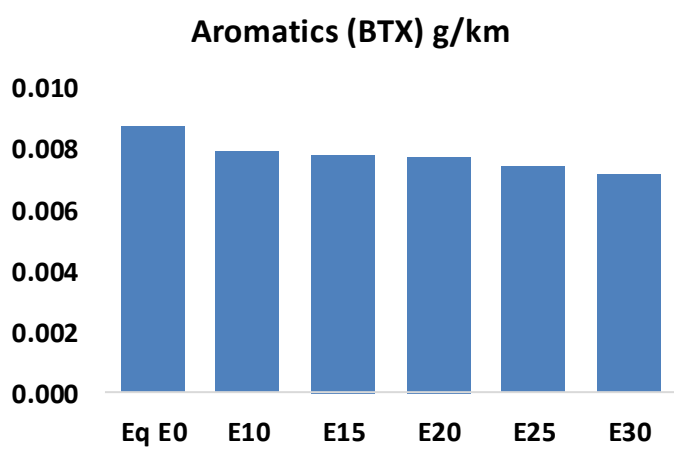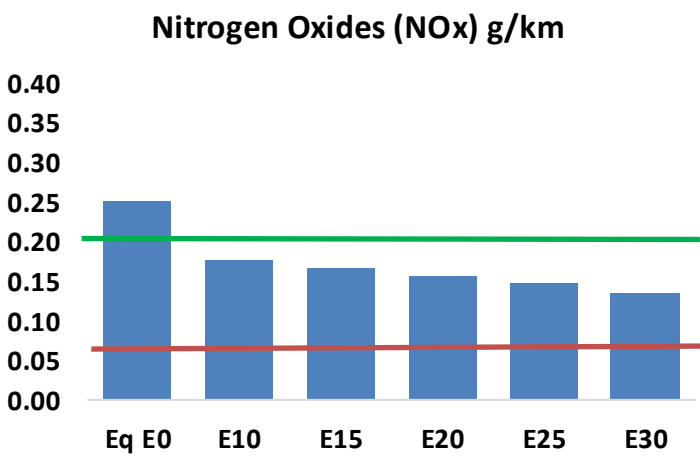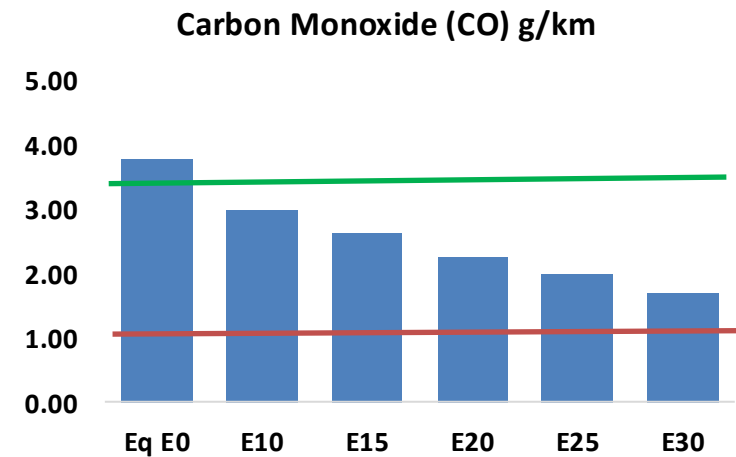

Estonia – Vehicular Emissions

Vehicular Fleet Emissions (kg/day)	Eq E0	E5	E10	E15	E20	E25	E30	Reduction (%)	
								E10	E20
CO	59,676	53,345	47,014	41,486	35,767	31,322	26,777	-21%	-40%
CO2	3,336,894	3,251,088	3,170,049	3,106,315	3,074,776	3,056,519	3,000,178	-5%	-8%
VOC	12,895	11,734	10,573	9,589	8,583	7,805	6,784	-18%	-33%
NOx	3,952	2,964	2,766	2,607	2,459	2,295	2,122	-30%	-38%
SOx	40	37	34	31	29	26	24	-15%	-28%
NH3	1,269	1,257	1,244	1,250	1,264	1,274	1,282	-2%	0%
N2O	53	53	53	53	54	55	55	-1%	2%
CH4	2,578	2,578	2,578	2,616	2,673	2,722	2,769	0%	4%
Lead	-	-	-	-	-	-	-	0%	0%
Butadiene	57	54	51	49	47	45	43	-10%	-18%
Acetaldehyde	199	228	335	510	695	794	938	68%	249%
Formaldehyde	758	737	859	1,009	1,057	1,169	1,273	13%	39%
Benzene	137	132	125	123	122	117	113	-9%	-11%
PM2.5	207	184	161	139	118	96	73	-22%	-43%
PM10	474	421	368	319	271	220	167	-22%	-43%


Life Cycle GHG Emissions

The Global Agenda for Climate Action calls for countries, cities and regions, businesses, and members of civil society around the world to achieve a low-carbon and climate-resilient economies in support of the Paris Agreement. Road Transportation accounts for 15% of total GHG emissions (IPCC,2023).


Ethanol gasoline blends are an internationally adopted practice that offer significant short-term benefits. Biofuels are an important solution to achieve reduction targets in the transportation sector.

Country GHG emission reductions are calculated using **RED II/III** and **GREET** life cycle emission methodologies and the **International Vehicular Emissions Model (IVE)**. Results are compared to the current country targets for 2035. Current 2024 country emission are those published by **IPCC**.


Current GHG Global Emissions Distribution

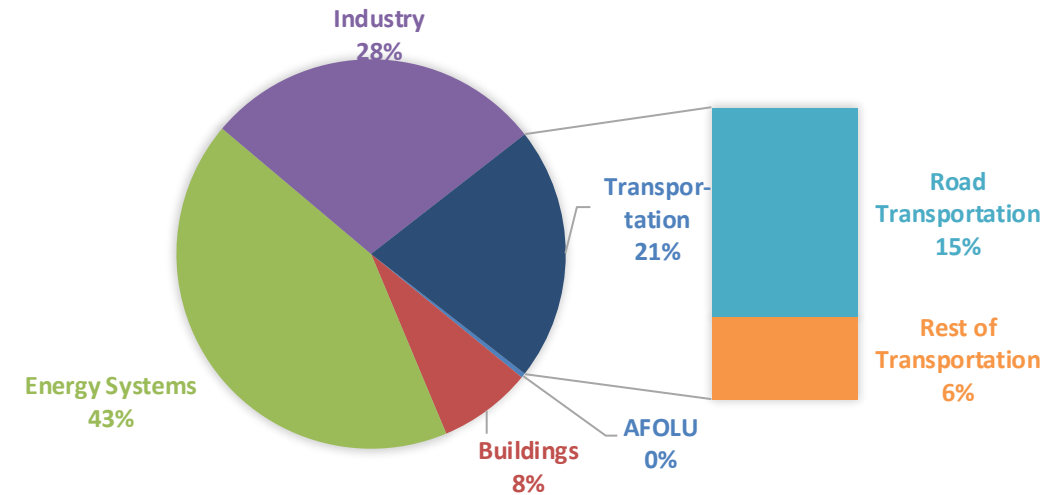

IPCC Transport Sector Sustainable Development Goals and climate policies Scenario, 2023

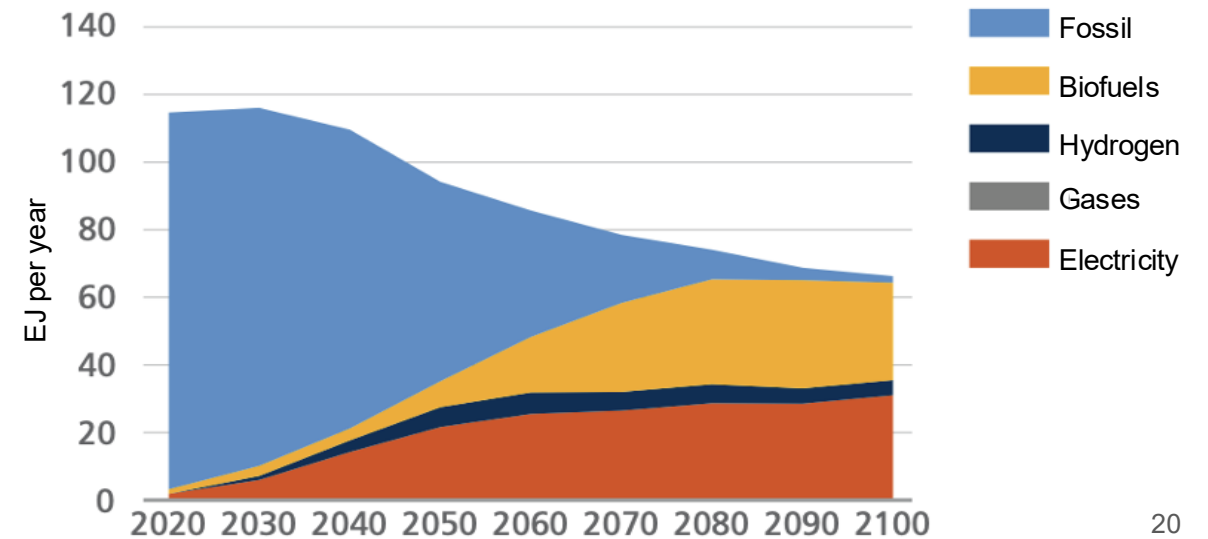

Estonia – Gasoline Vehicle Fleet Life Cycle GHG Emissions

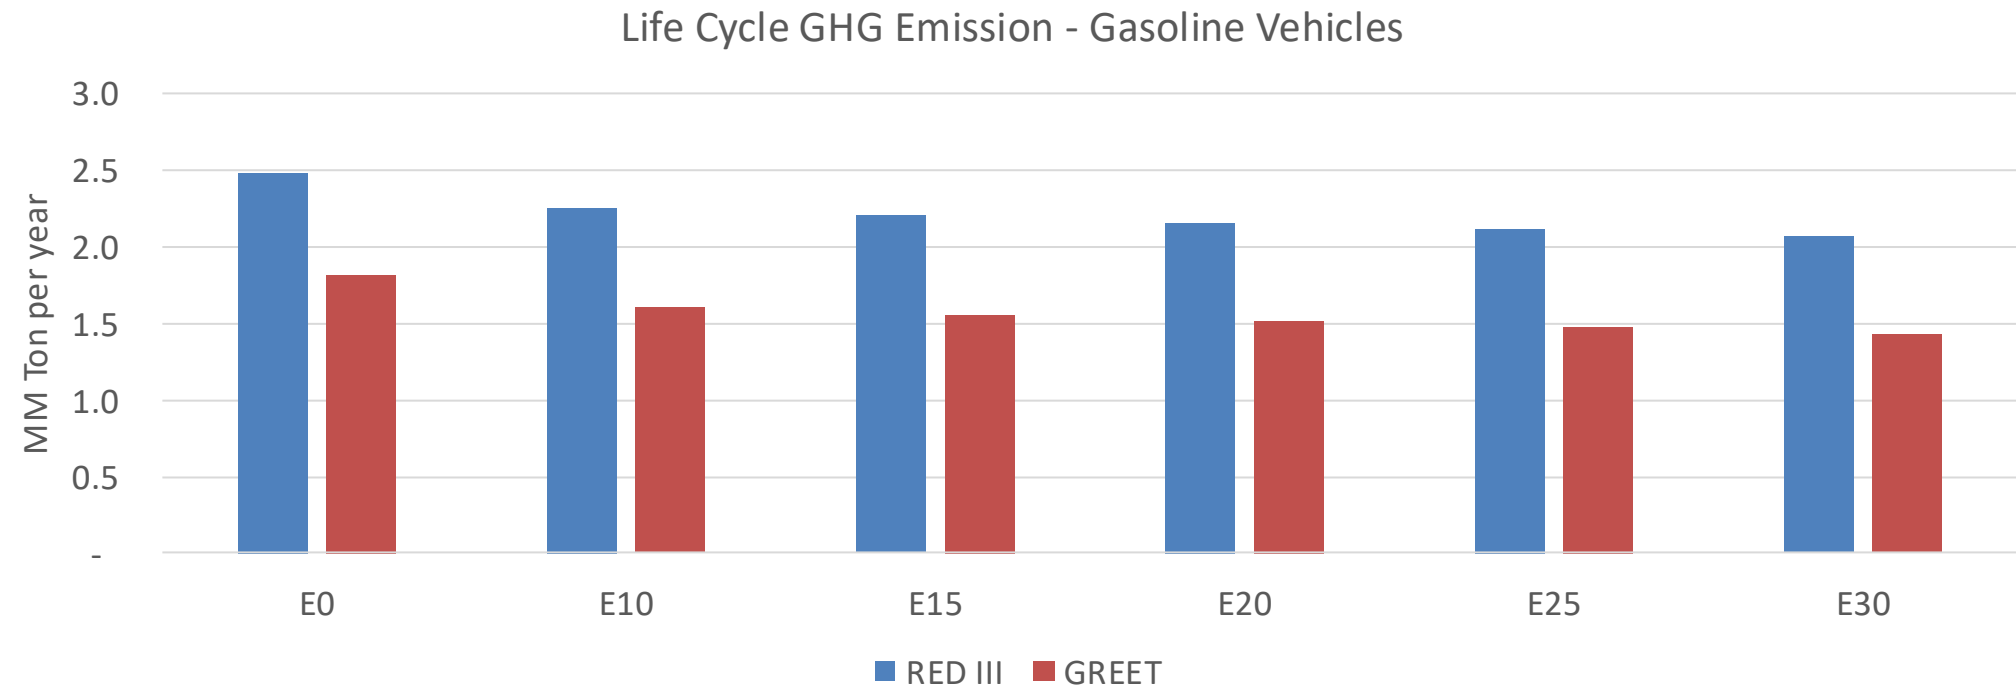

Country Emissions 2024 (MMT/año)	15.6
Target @ 2035 (MMT/year)	8.8
Delta	6.8

%Reduction vs E0	E0	E10	E15	E20	E25	E30
REET 2024	0.0%	11.7%	14.5%	16.7%	18.7%	21.5%
RED II/III	0.0%	8.9%	11.1%	12.8%	14.4%	16.6%

% Target@2035	E0	E10	E15	E20	E25	E30
REET 2024	0.0%	3.1%	3.9%	4.4%	5.0%	5.7%
RED II/III	0.0%	3.2%	4.0%	4.7%	5.2%	6.0%

Source: Greet, RED II/III, IPCC, climateactiontracker.org, F90