

Ethanol Blending in Gasoline – Finland


September 2025



**U.S. GRAINS &
BIOPRODUCTS
COUNCIL**

20 F St. NW, Suite 900 \ Washington, DC 20001
202-789-0789 \ www.grains.org

FARO90



www.faro90.com
+52 55 6122 2255

Ethanol Blending in Europe

There are important fuel quality and environmental impact of vehicle emission challenges in the Region.

- The use of ethanol improves gasoline quality and creates flexibility in gasoline production.
- Ethanol use is a cost-effective way to increase gasoline octane and to replace more expensive gasoline components.
- Ethanol contributes to transport decarbonization and air quality improvement.
- There are opportunities across Europe to increase the ethanol blend level and implement new policies on the use of gasoline-ethanol blends.



Twenty eight countries with potential and additional use of ethanol were studied: 1) Gasoline market profiles; 2) Optimization of gasoline blends with ethanol and, 3) Environmental impact of gasolines blended with ethanol.

Ethanol Gasoline Blending in Finland




In 2024, gasoline consumption in Finland was 2,341 million liters (618 million gallons) and growth rate was 0.5%. Gasoline production and net imports were 5,450 and -3,109 million liters (1,440 and -821 million gallons) correspondingly. Finland complies with the European gasoline standards and offers two main grades: RON 95 and RON 98) with an average octane of 95.2 RON.


In 2024, ethanol consumption in Finland was 299 million liters (79 million gallons) representing 12.8% of gasoline demand. Ethanol production and Net Imports were 67 and 233 million liters (79 and 61 million gallons) correspondingly. Ethanol sources are Corn 5%, Cereals 85% and 2G lignocelulosic Ethanol 10%.

Source: Eurostat, European Commission

Gasoline Demand in Finland

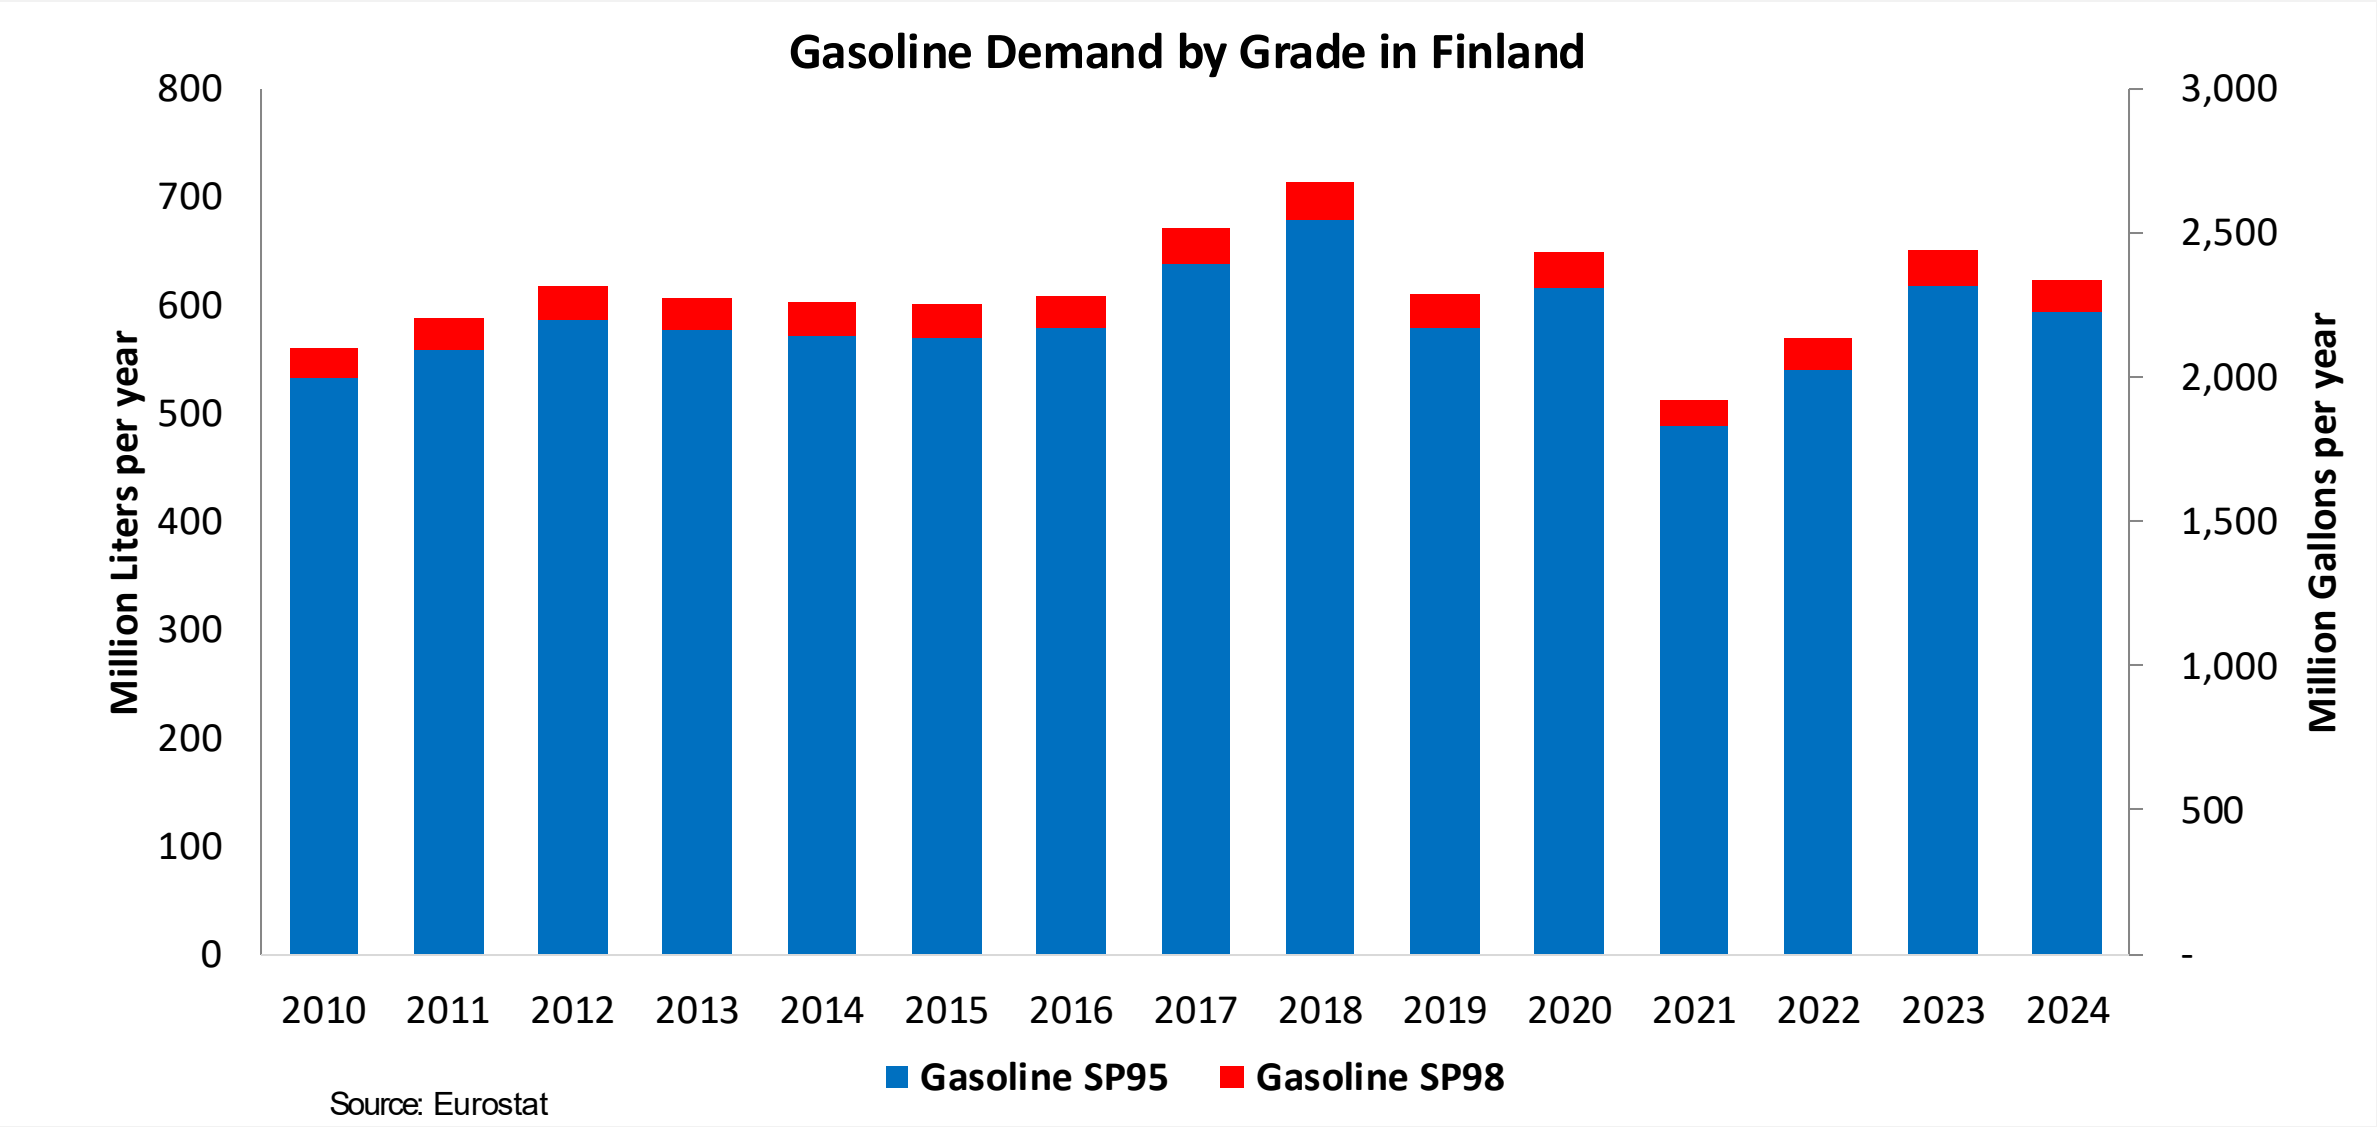


Gasoline Production in Finland

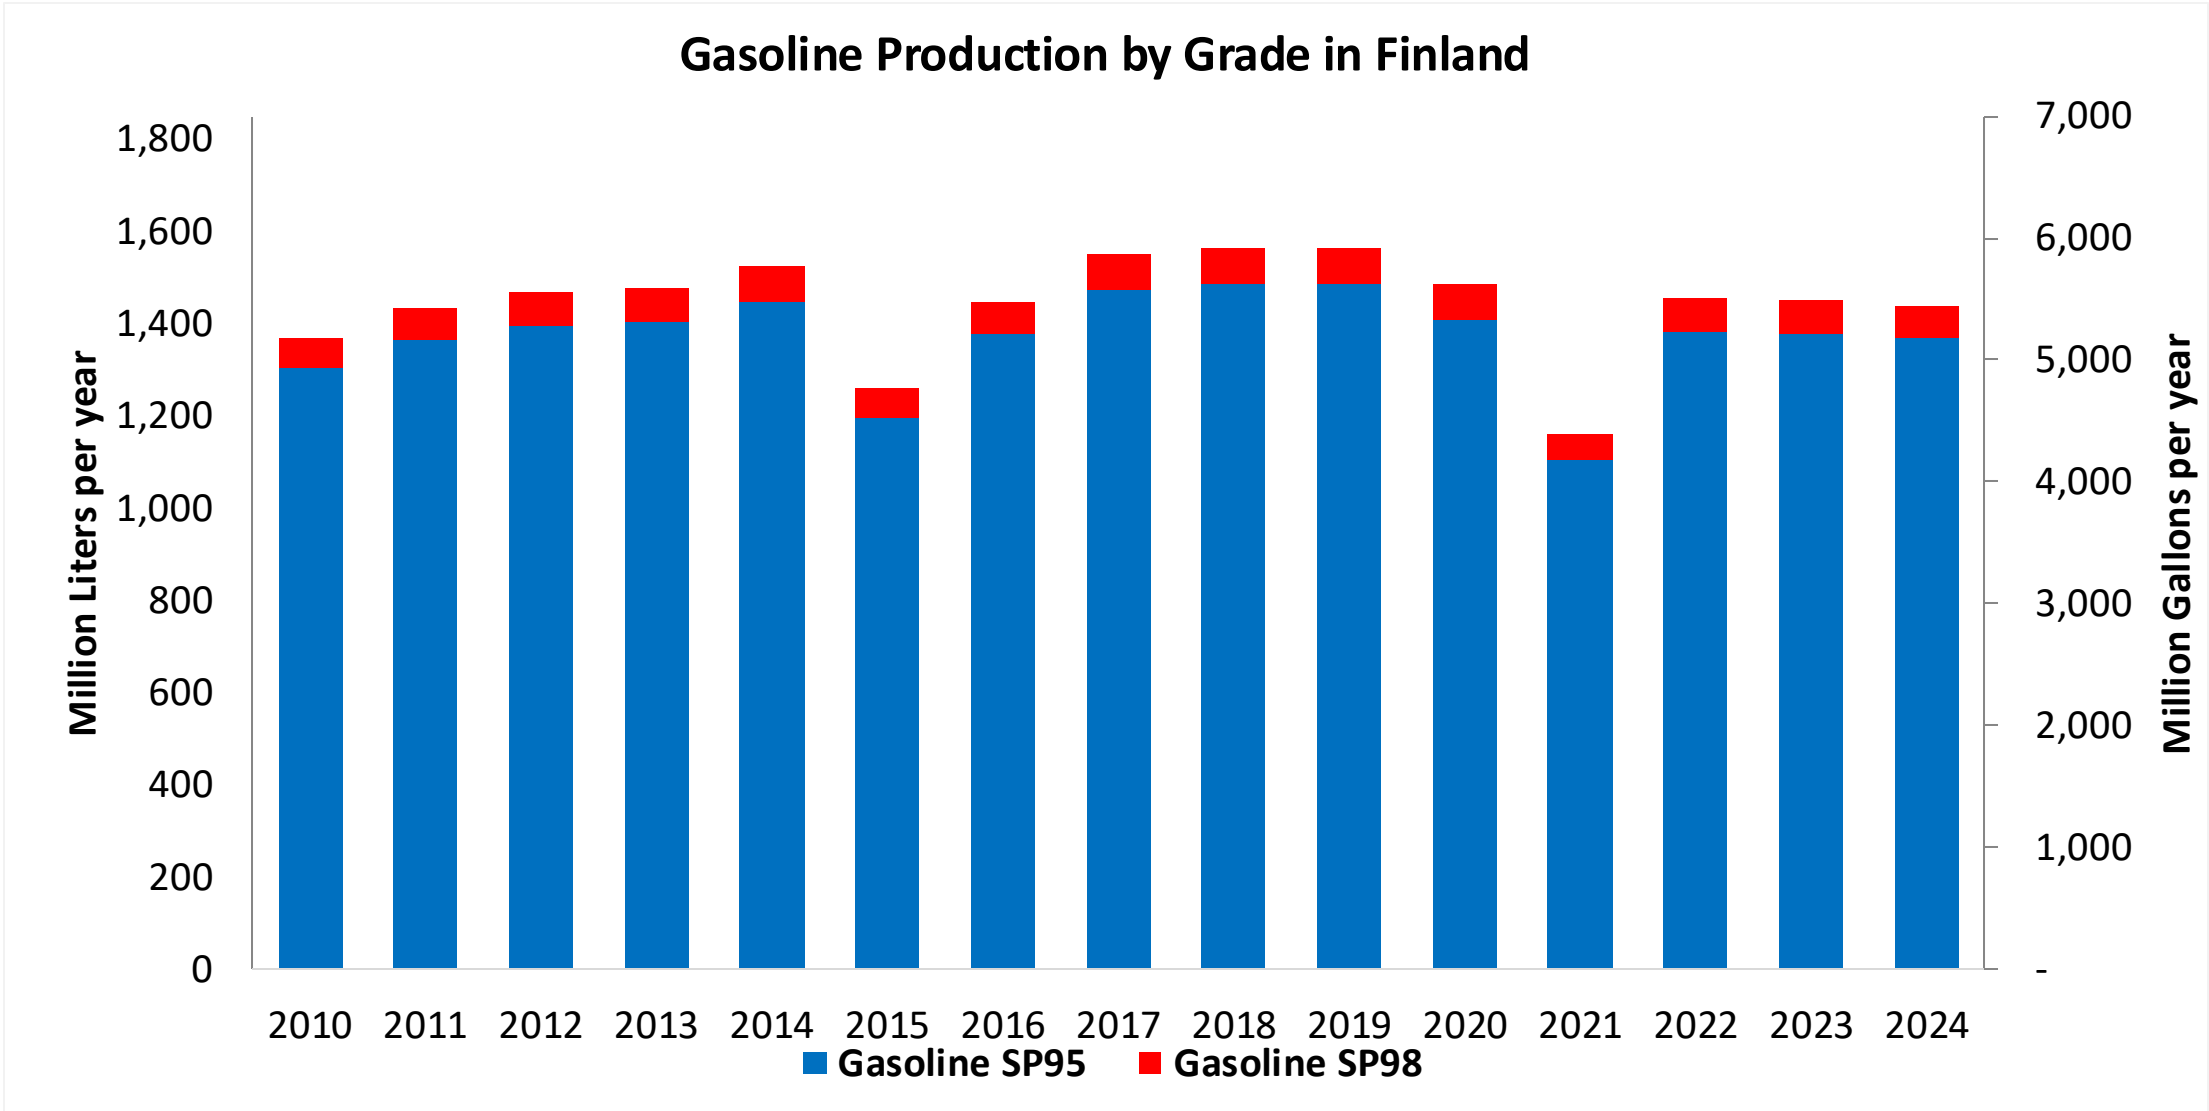


Source: Eurostat


The FARO90 logo is shown in a blue box, followed by a chemical structure diagram of a substituted cyclohexadiene. The structure features a six-membered ring with two double bonds. Substituents include a methyl group, a propyl group, and a group labeled 'X'. The letters 'H', 'C', and 'X' are highlighted in orange in the original image.



Gasoline Exports in Finland

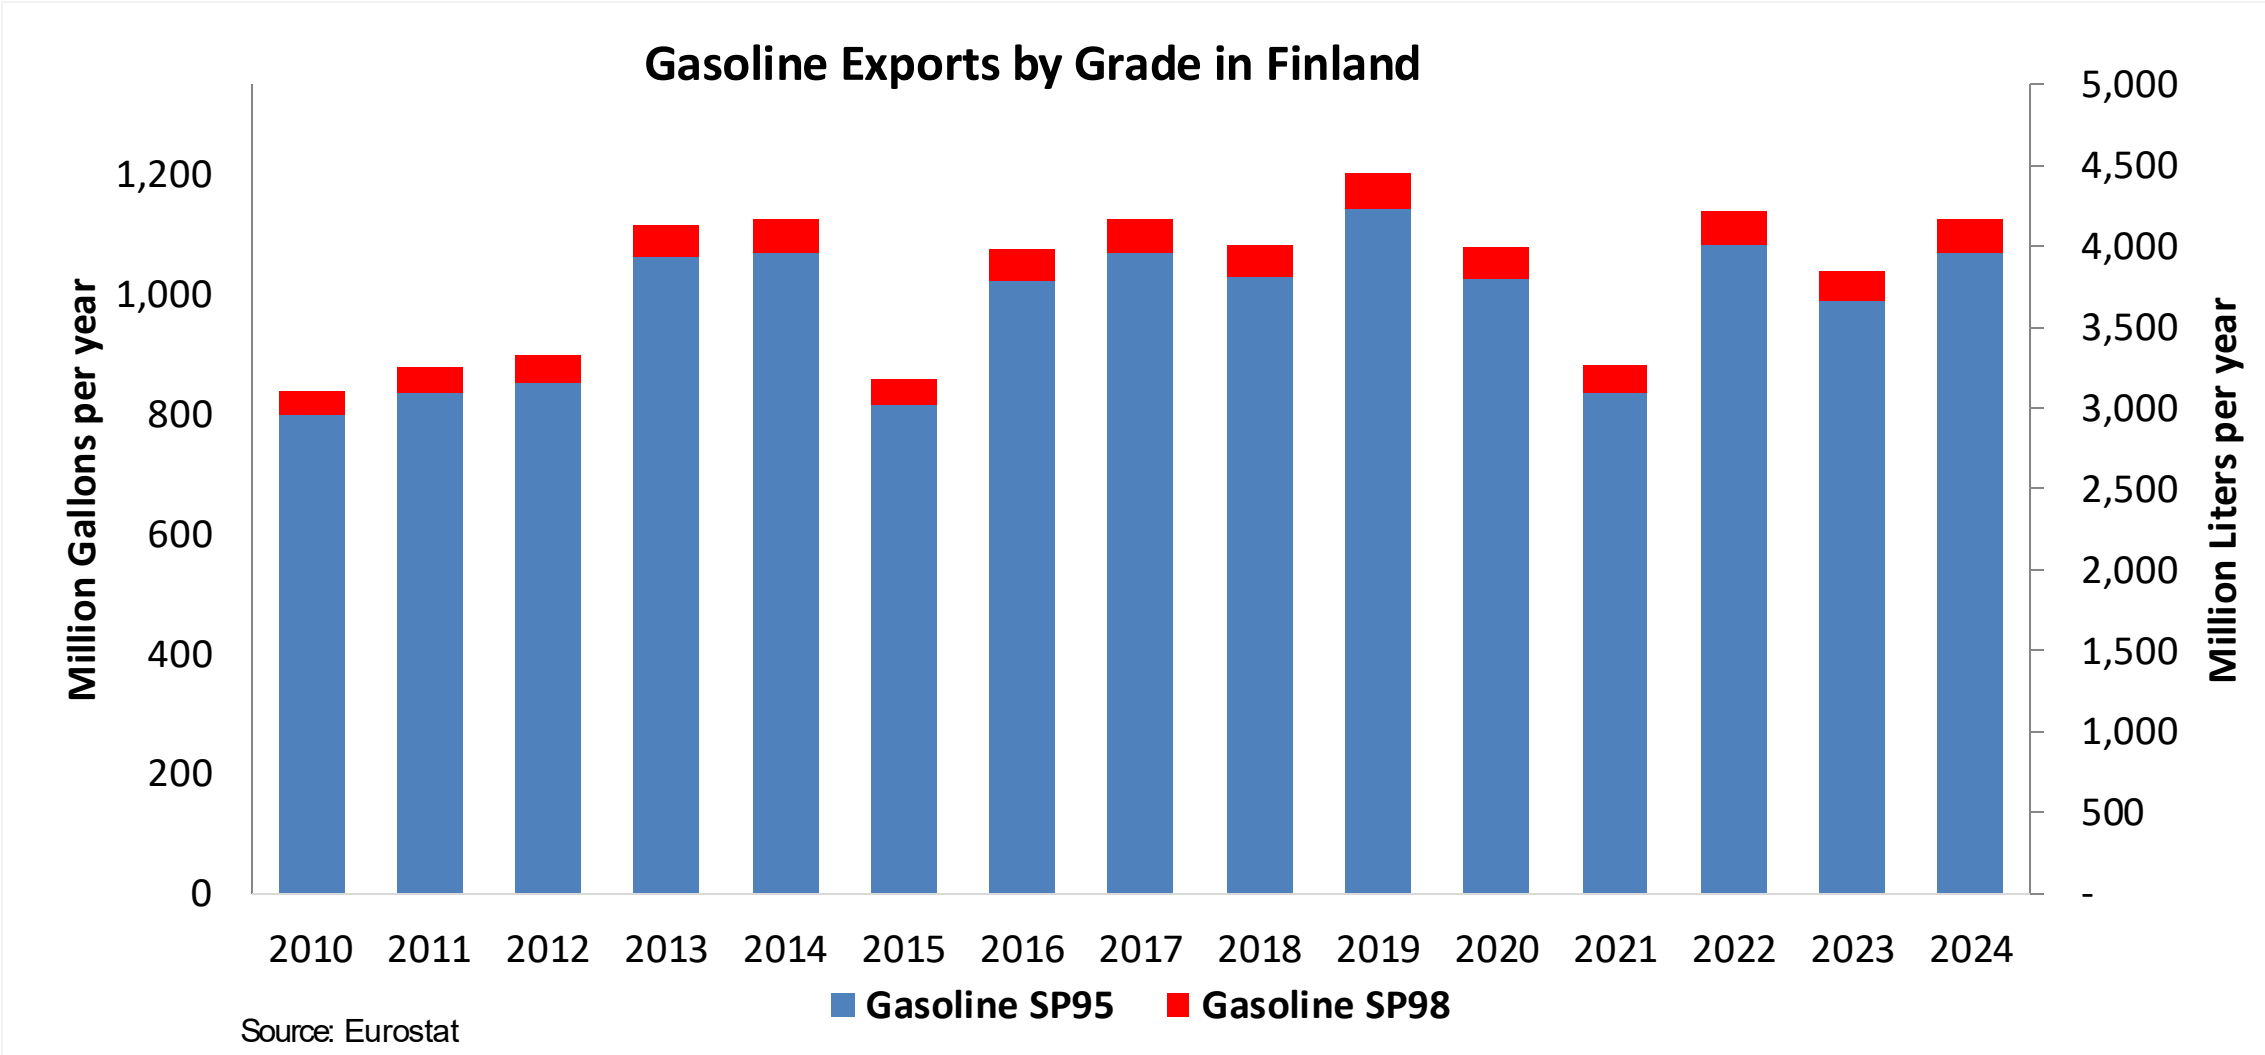

Ethanol Balance in Finland

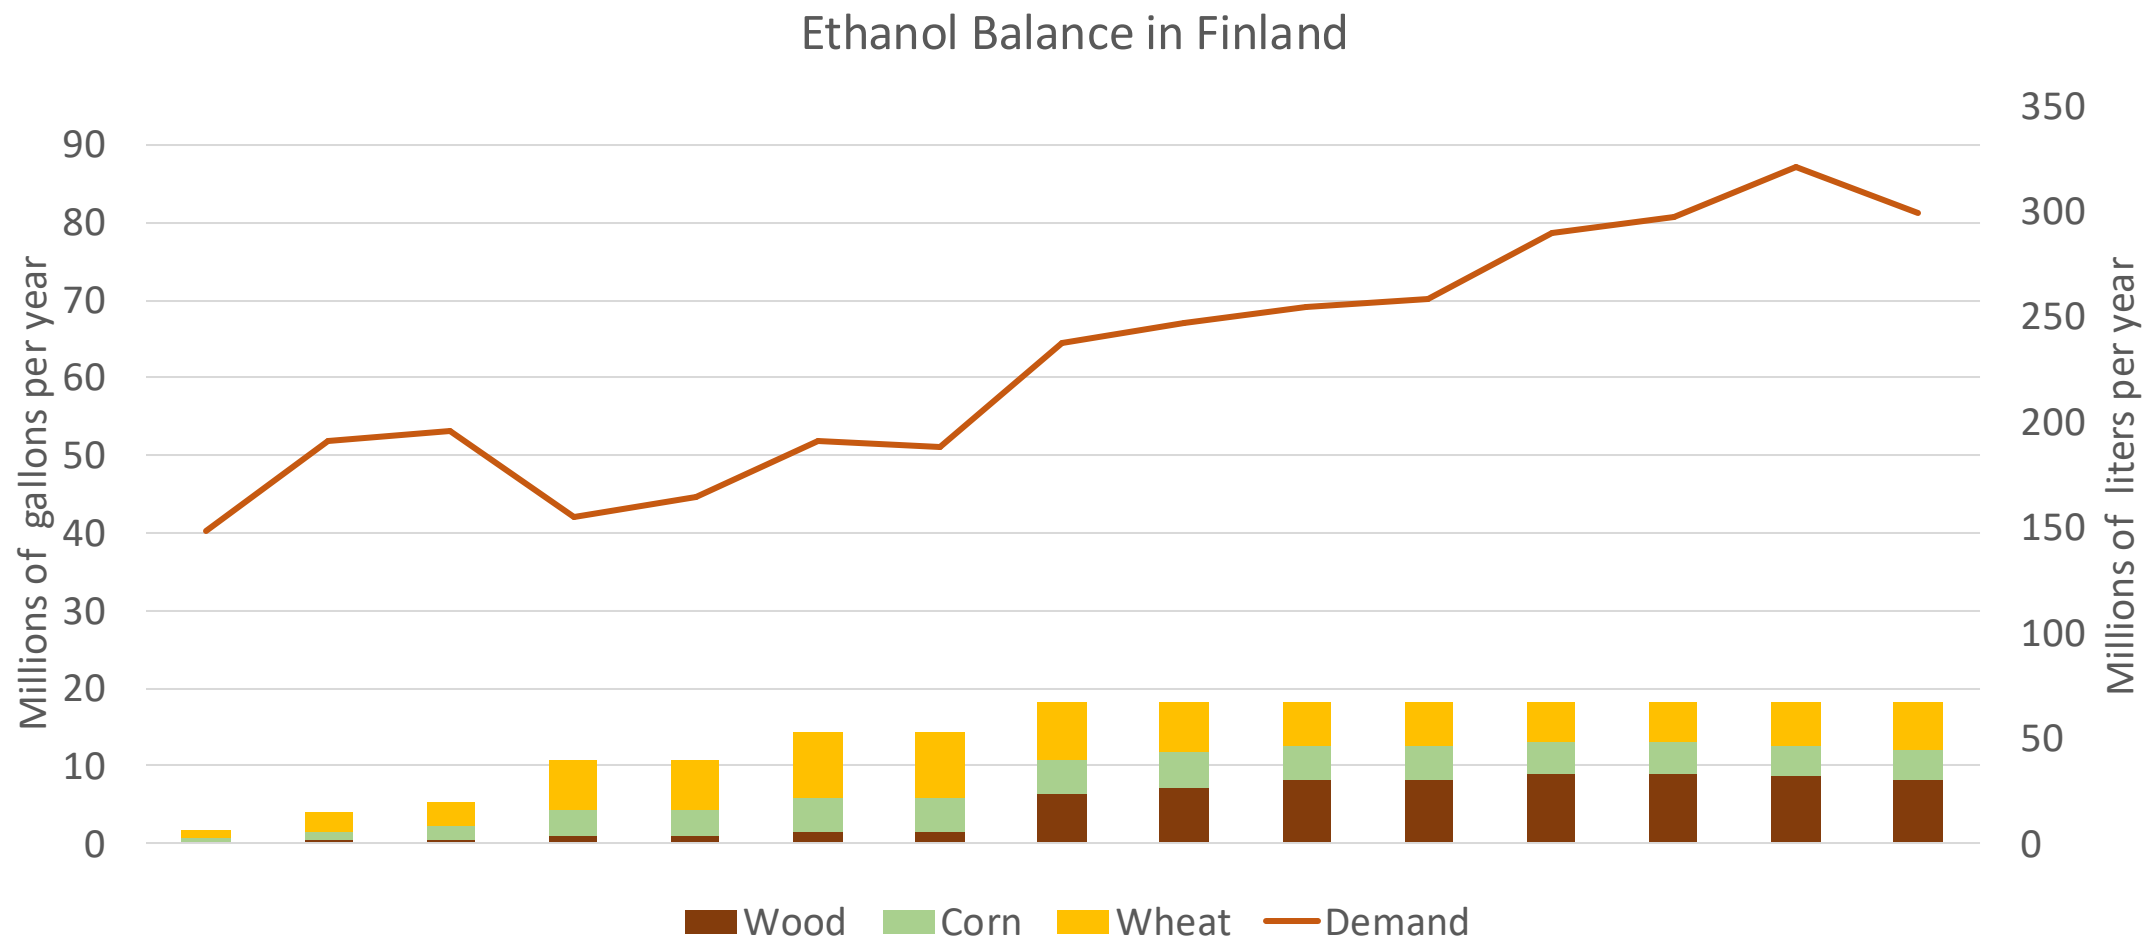

Source: Eurostat

Gasoline Quality in Finland

Name	EN 228:2025 (Euro 6); Country Level Fuel Ordinances							
Implementation Date	2025							
Applicability	All EU Countries + UK							
Grade	RON 95 E5		RON 95 E10		RON 98 E5		RON 98 E10	
	Min	Max	Min	Max	Min	Max	Min	Max
RON	95.0		95.0		98.0		98.0	
MON	> 85	> 88	> 85	> 88	> 85	> 88	> 85	> 88
AKI								
Benzene (%vol)	< 1							
Aromatics (% vol)	< 35							
Olefins (%vol)	< 18							
Lead (g/L)	< 0.005							
Manganese (mg/L)	< 2,0							
Sulfur (ppm)	10.0							
Oxygen (%w)*	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7
Ethanol (%vol)	< 5	< 10	< 5	< 10	< 5	< 10	< 5	< 10
PVR 37.8°C (psi)	<> 45 - 100 kPa in 6 Volatility Classes							
Overall Biofuels (%cal)	16.5							
Advanced Biofuels (%cal)	4.0							
Bioethanol in Gasoline Sales (%cal)	-							
GHG Emission Reduction (%)	-							

* Methanol 3%, Iso-propyl alcohol 12%, Ter-butyl alcohol 15%, Iso-butyl alcohol 15%, Ethers +5 Carbons 22%, Other Oxygenates 15%

Source: European Commission


Gasoline Component Blending in Europe



Gasoline is a blend of a base gasoline and other components. Each component provides different properties to the final blend, for example, isomerates, alkylates and butanes increase the octane. The components commonly used in Europe are:

- Catalytic Gasoline
- Light Primary Naphta
- Heavy Primary Naphta
- Reformate
- Isopentane
- Alkylate
- Isomerate
- Hydrocracked Gasoline
- Coker Naphta
- n-Butane
- MTBE
- ETBE
- TAME
- Aromatics

Source: Faro90

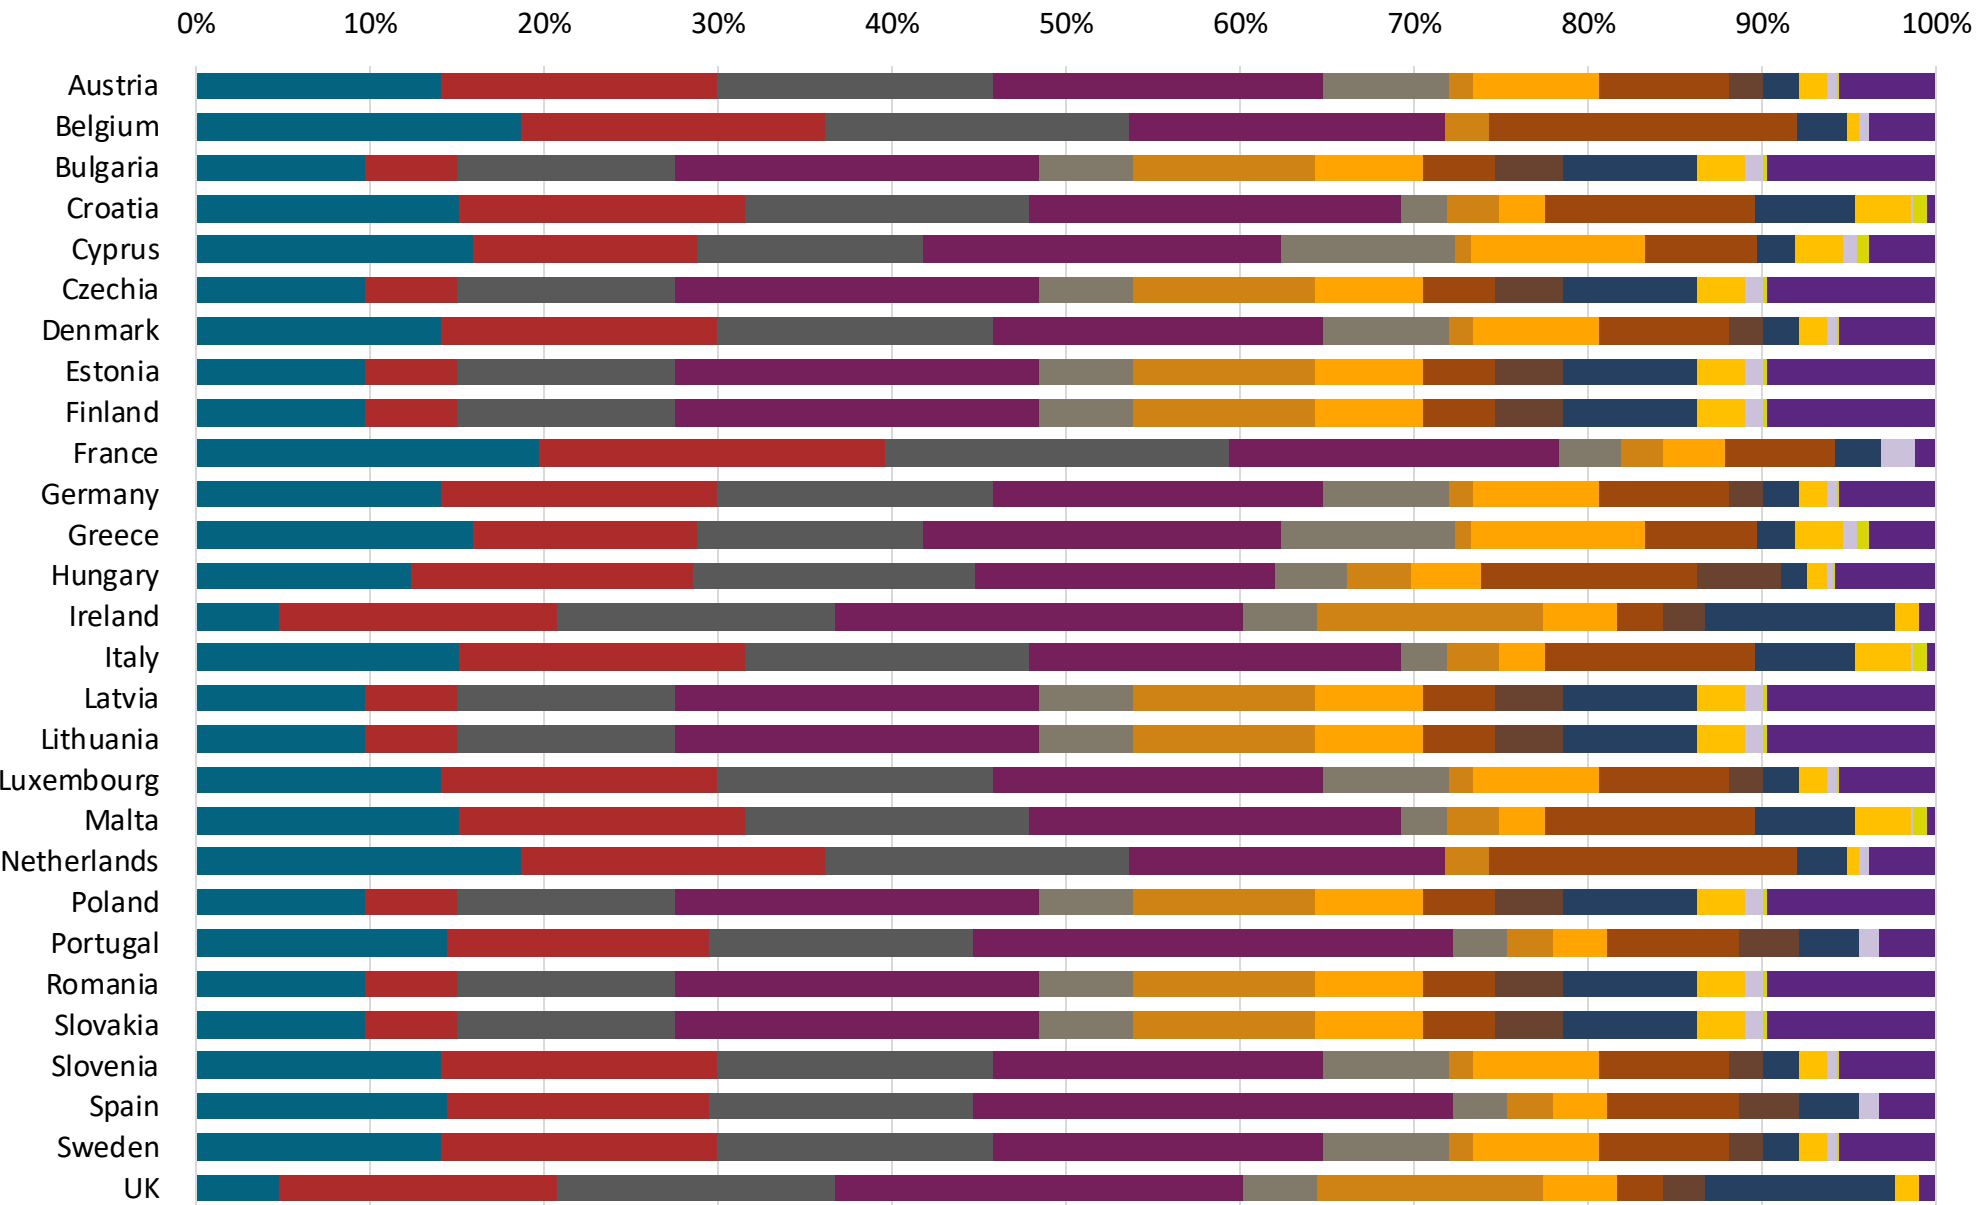


Gasoline Blending Optimization

In some parts of the world, ethanol is added to gasoline as a blending component. The advantages of ethanol include that it is a renewable fuel made of biomass; that it is an octane booster that helps to dilute sulfur; and that it allows the fulfillment of environmental objectives. To determine the optimal components to be blended with ethanol, a **blending model** was used. This model selects the components to add in the gasoline/ethanol blend based on:


- Components prices,
- Properties each component affects,
- Quality parameters by country, and
- Component availability by country.

Through iterations, the model obtains the %v/v of the components to be blended with 10%, 15%, 20%, 25% and 30% of ethanol, in such a way that the final blend complies with the required properties of a finished gasoline by country.



The blending model uses gasoline component spot average prices 2024 and provides fuel prices that do not include country distribution costs, local taxes and subsidies and import or gas station margins.

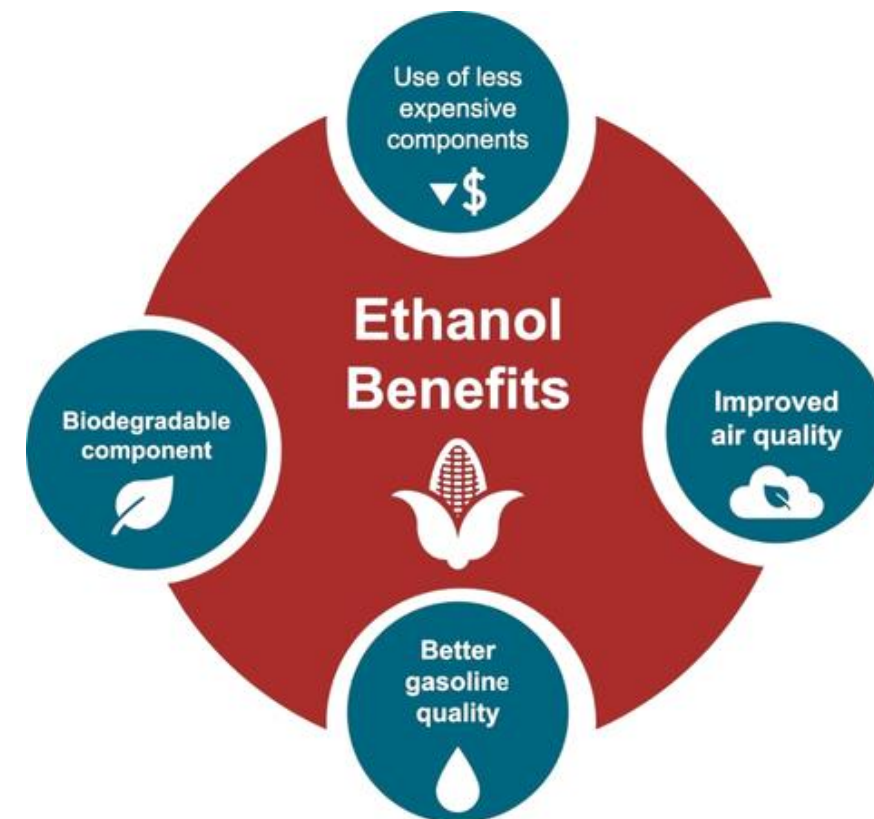

Finland Available Blending Components

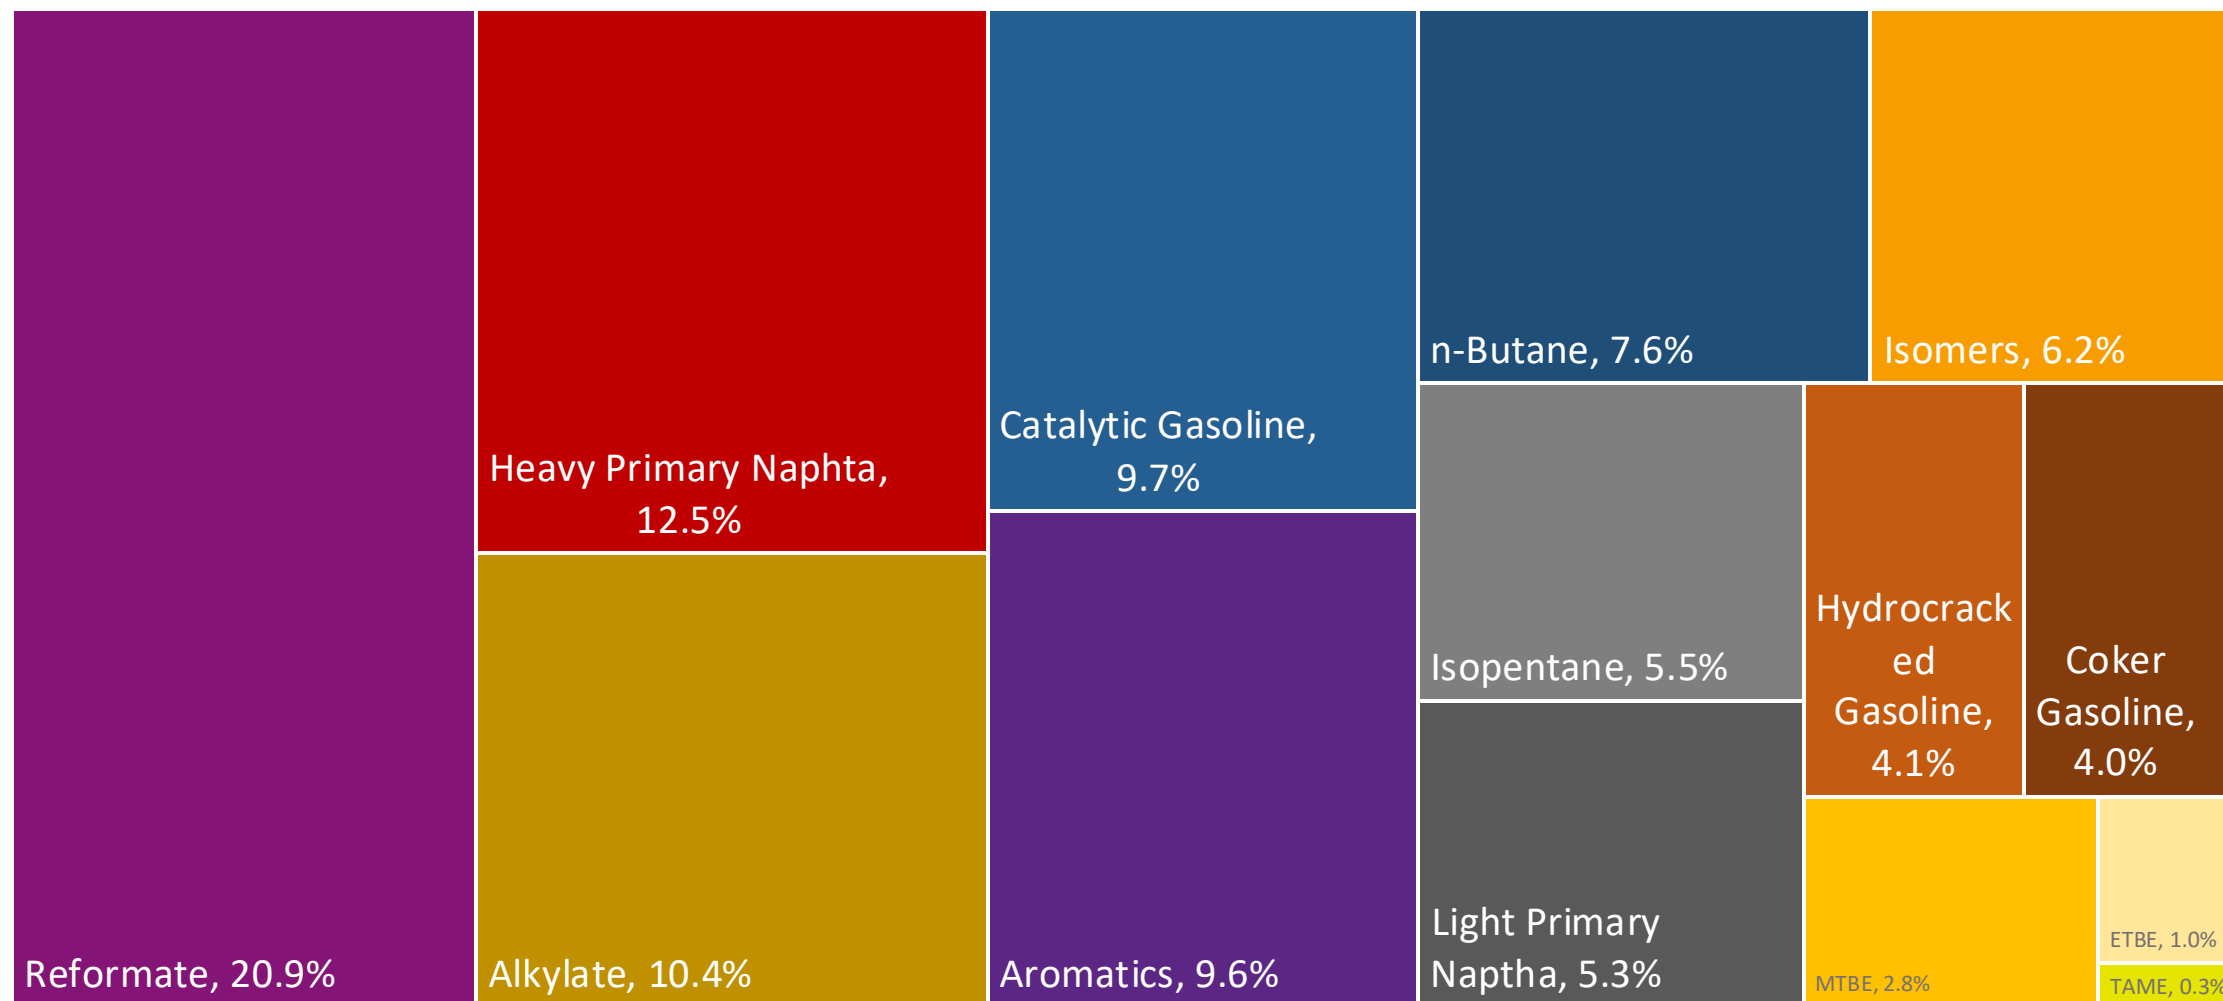



Finland – Gasoline 95 – Constant Octane

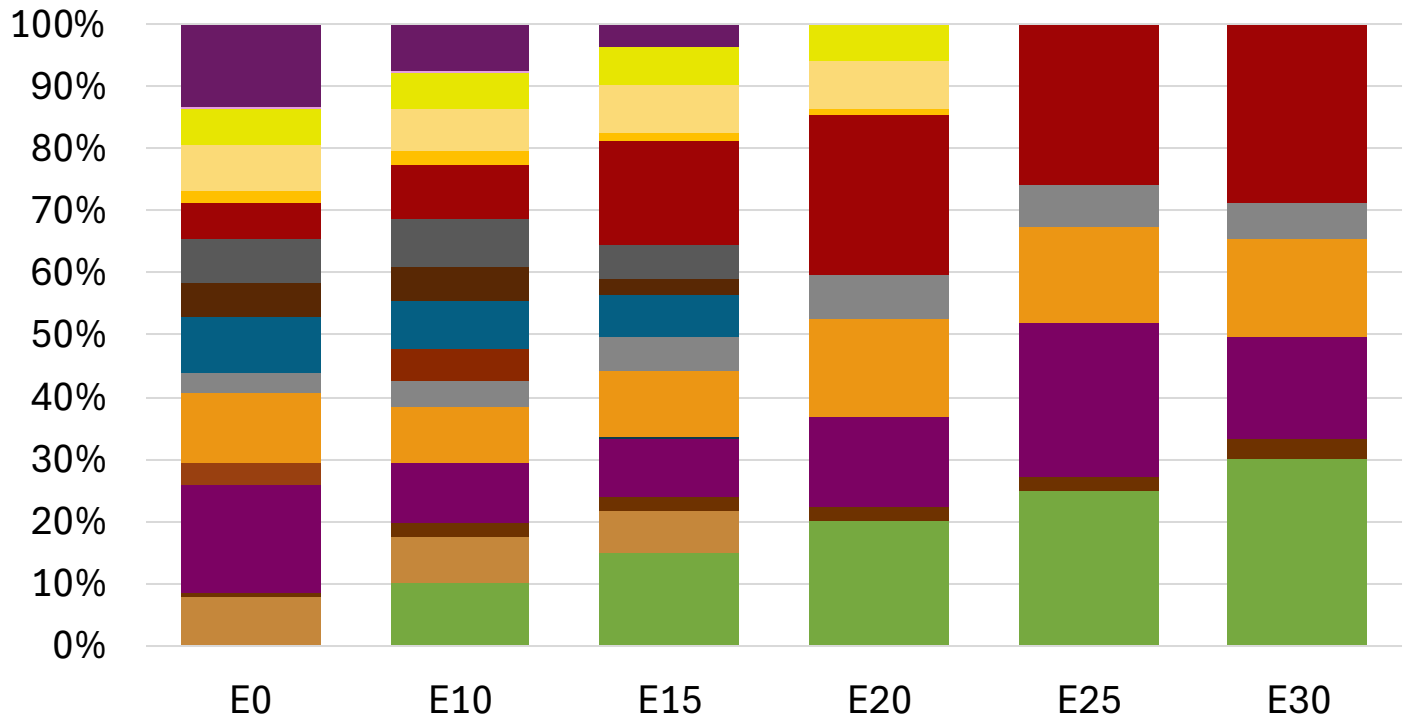

Average CIF 2024
Prices

Octane (RON)	95.0	95.0	95.0	95.0	95.0	95.8
Price (US\$/gal)	\$ 2.294	\$ 2.156	\$ 2.056	\$ 1.941	\$ 1.895	\$ 1.842



Finland - Gasoline 98 - Constant Octane

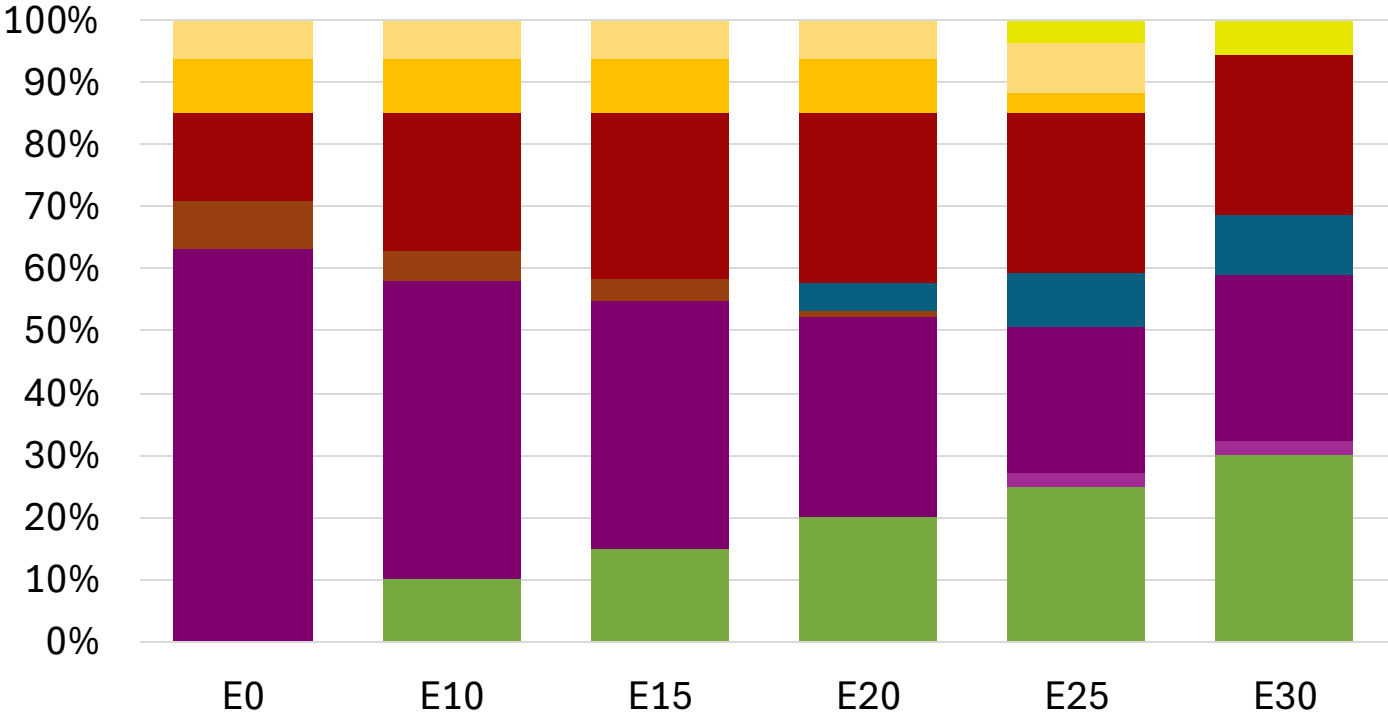

Average CIF 2024 Prices

Octane (RON)	98.0	98.0	98.0	98.0	98.0	98.0
Price (US\$/gal)	\$ 2.314	\$ 2.197	\$ 2.128	\$ 2.056	\$ 1.991	\$ 1.941



Finland – Gasoline 95 – Increased Octane

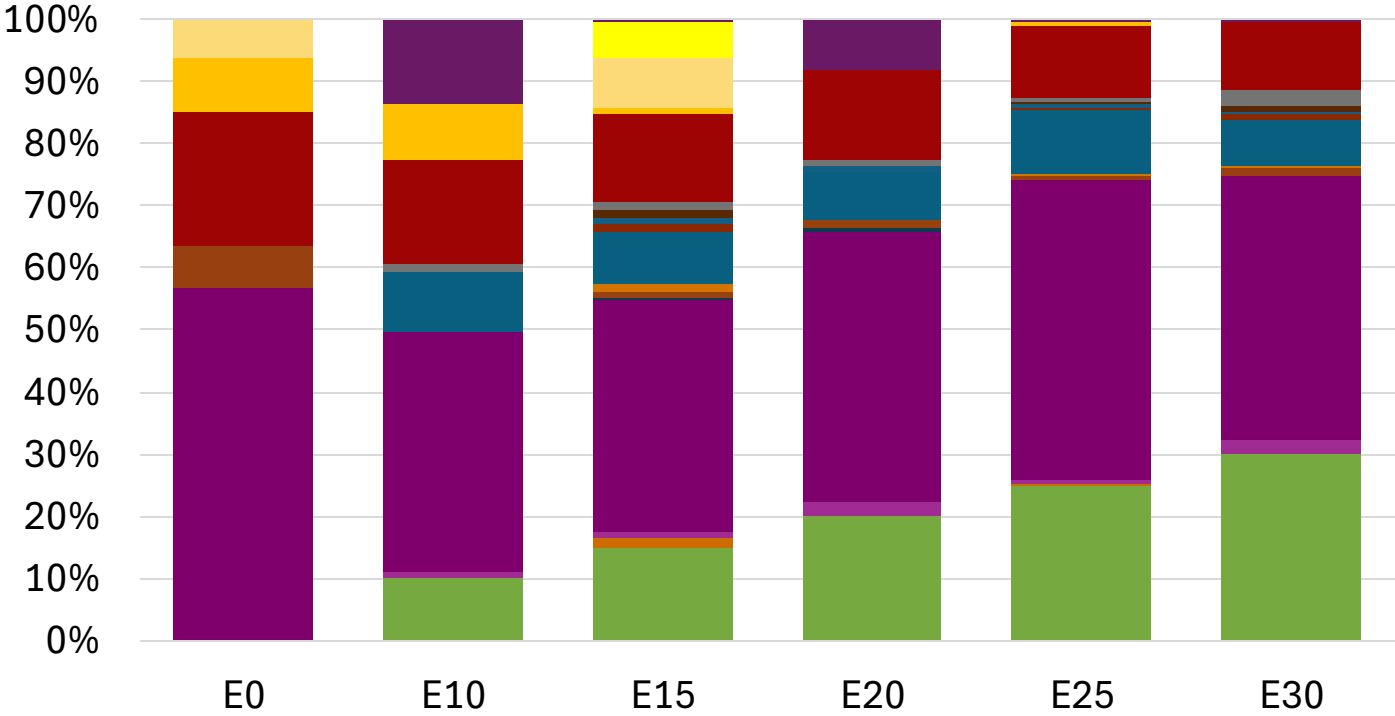

Average CIF 2024
Prices

Octane (RON)	95.0	96.2	98.3	98.7	100.5	101.8
Price (US\$/gal)	\$ 2.182	\$ 2.182	\$ 2.182	\$ 2.182	\$ 2.182	\$ 2.182

Finland – Gasoline 98 – Increased Octane

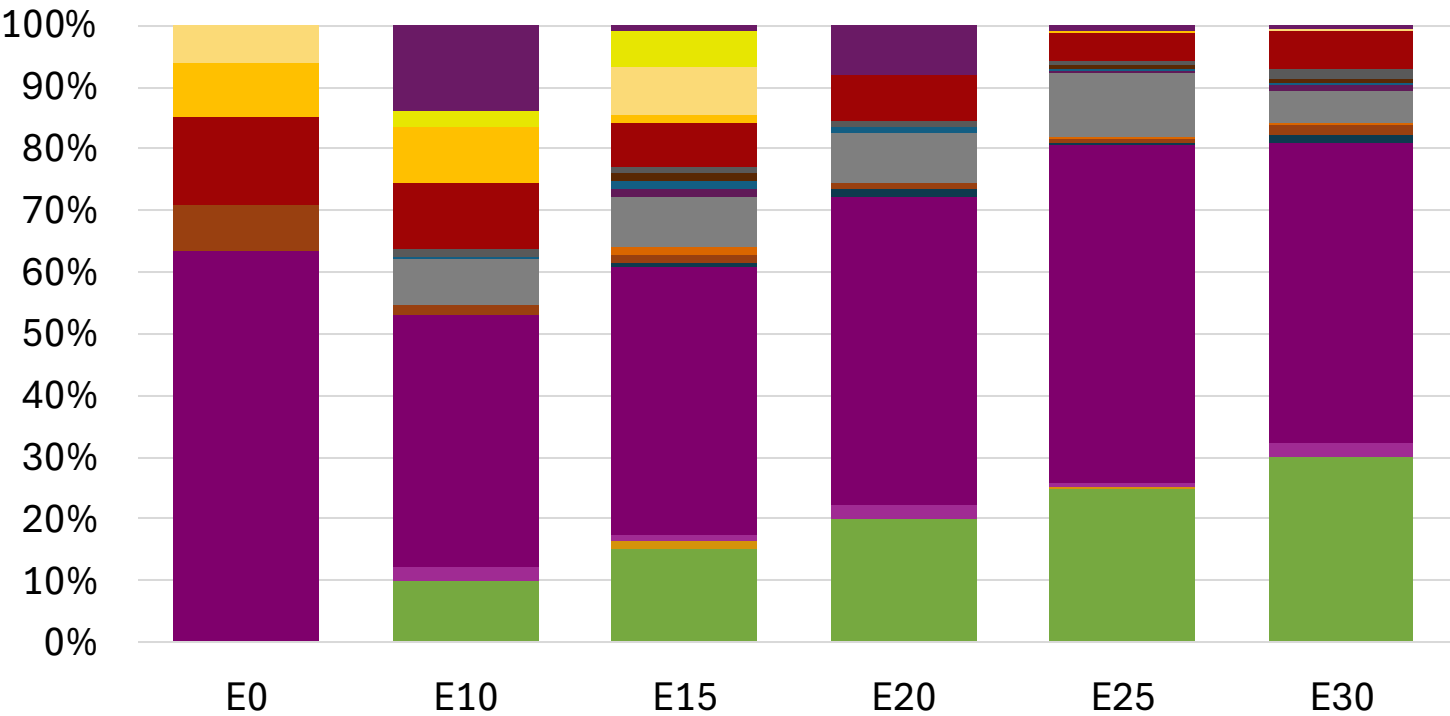



Average CIF 2024
Prices

Octane (RON)	98.0	99.0	100.9	101.2	102.8	104.1
Price (US\$/gal)	\$ 2.314	\$ 2.314	\$ 2.314	\$ 2.314	\$ 2.314	\$ 2.314

Source: Faro90



Finland – Gasoline 95 – Constant Octane

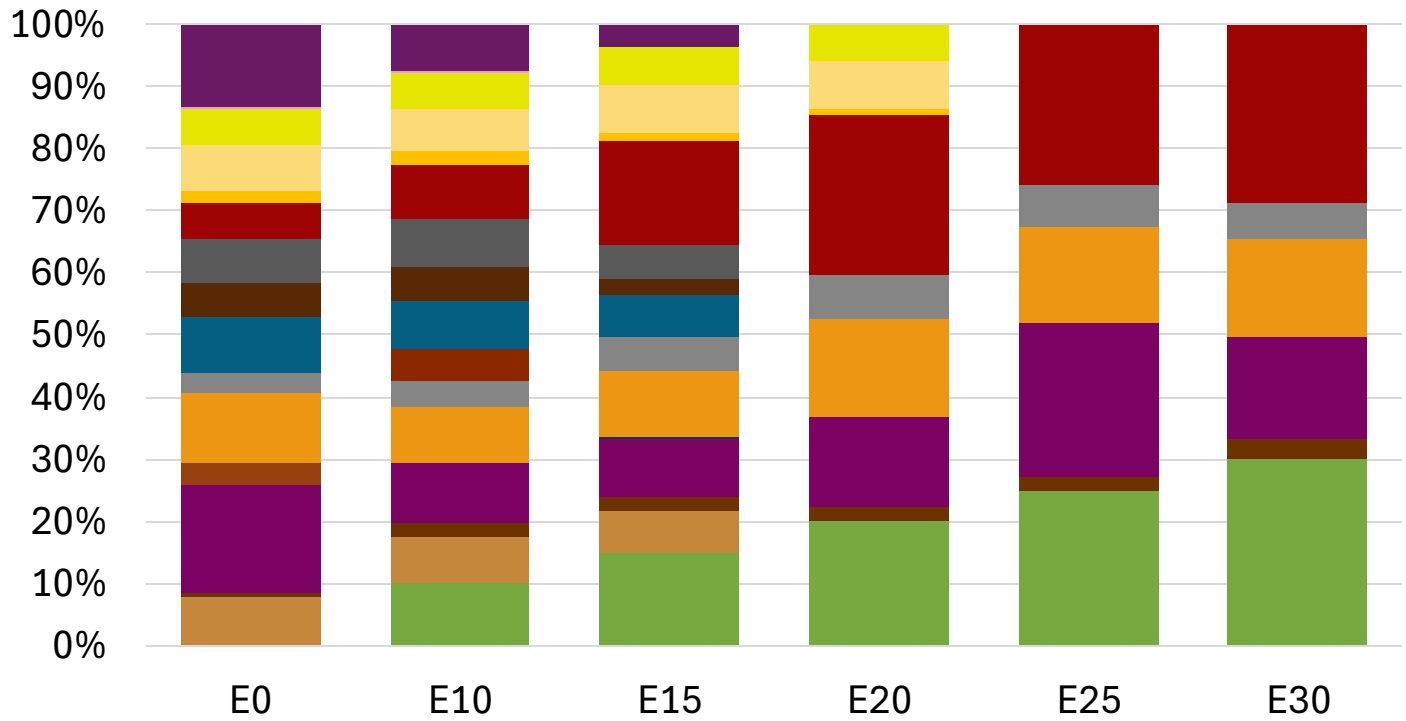

Average CIF 2024
Prices

Octane (RON)	95.0	95.0	95.0	95.0	95.0	95.8
Price (US\$/gal)	\$ 2.274	\$ 2.136	\$ 2.036	\$ 1.921	\$ 1.875	\$ 1.822


Finland - Gasoline 98 - Constant Octane

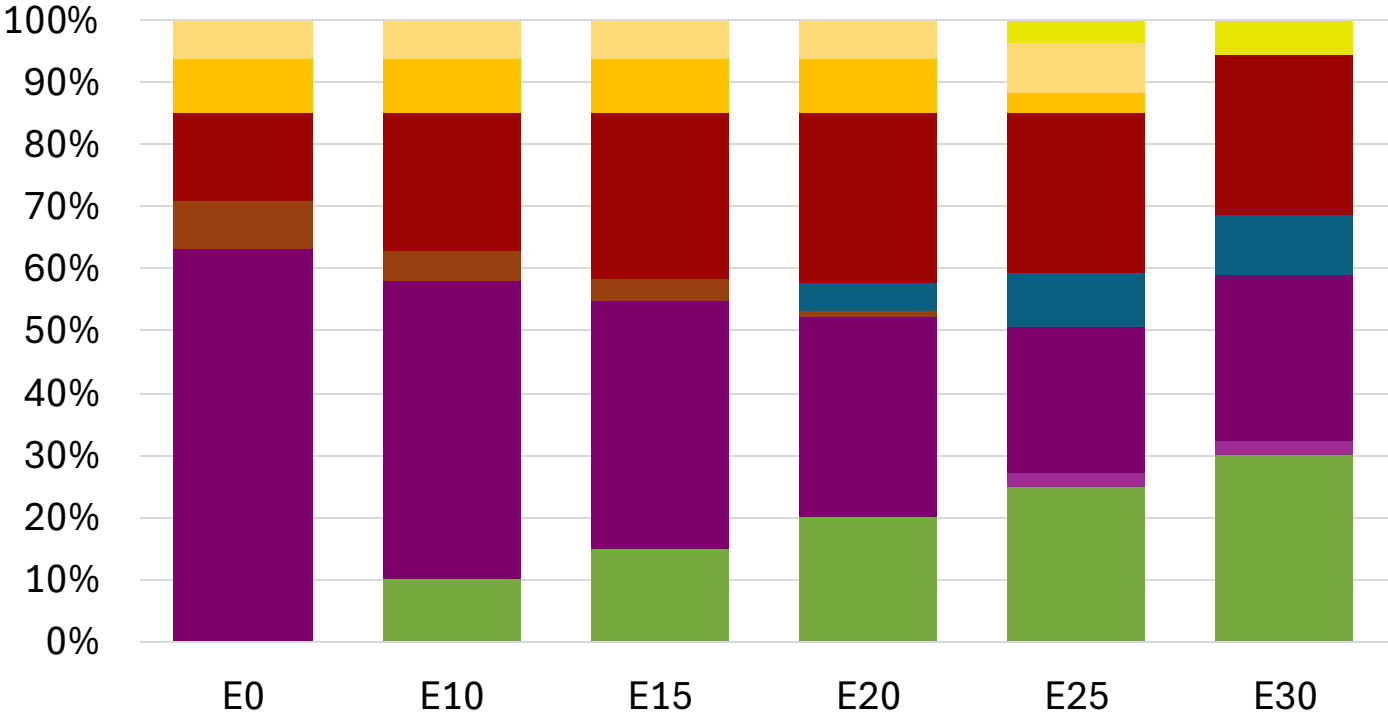

Average CIF 2024
Prices

Octane (RON)	98.0	98.0	98.0	98.0	98.0	98.0
Price (US\$/gal)	\$ 2.294	\$ 2.177	\$ 2.108	\$ 2.036	\$ 1.971	\$ 1.921



Finland – Gasoline 95 – Increased Octane

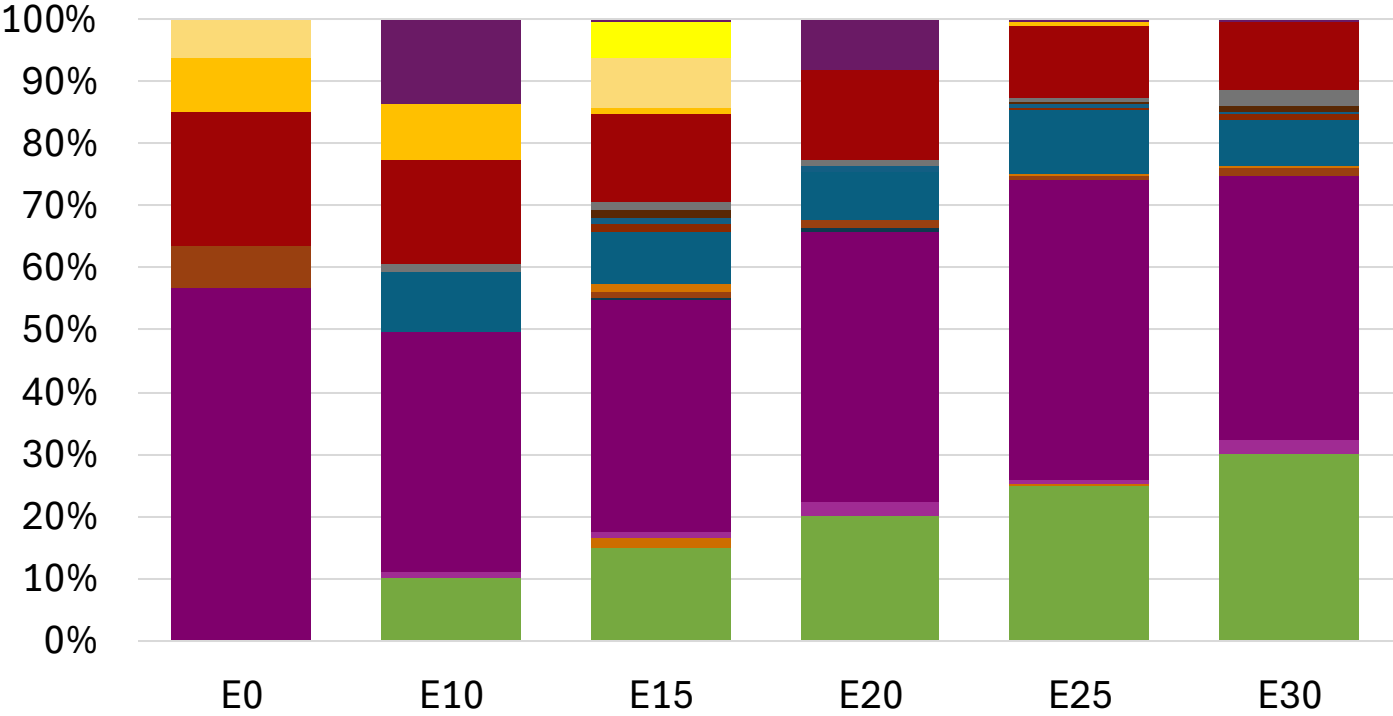

Average CIF 2024
Prices

Octane (RON)	95.0	96.2	98.3	98.7	100.5	101.8
Price (US\$/gal)	\$ 2.162	\$ 2.162	\$ 2.162	\$ 2.162	\$ 2.162	\$ 2.162

Finland – Gasoline 98 – Increased Octane

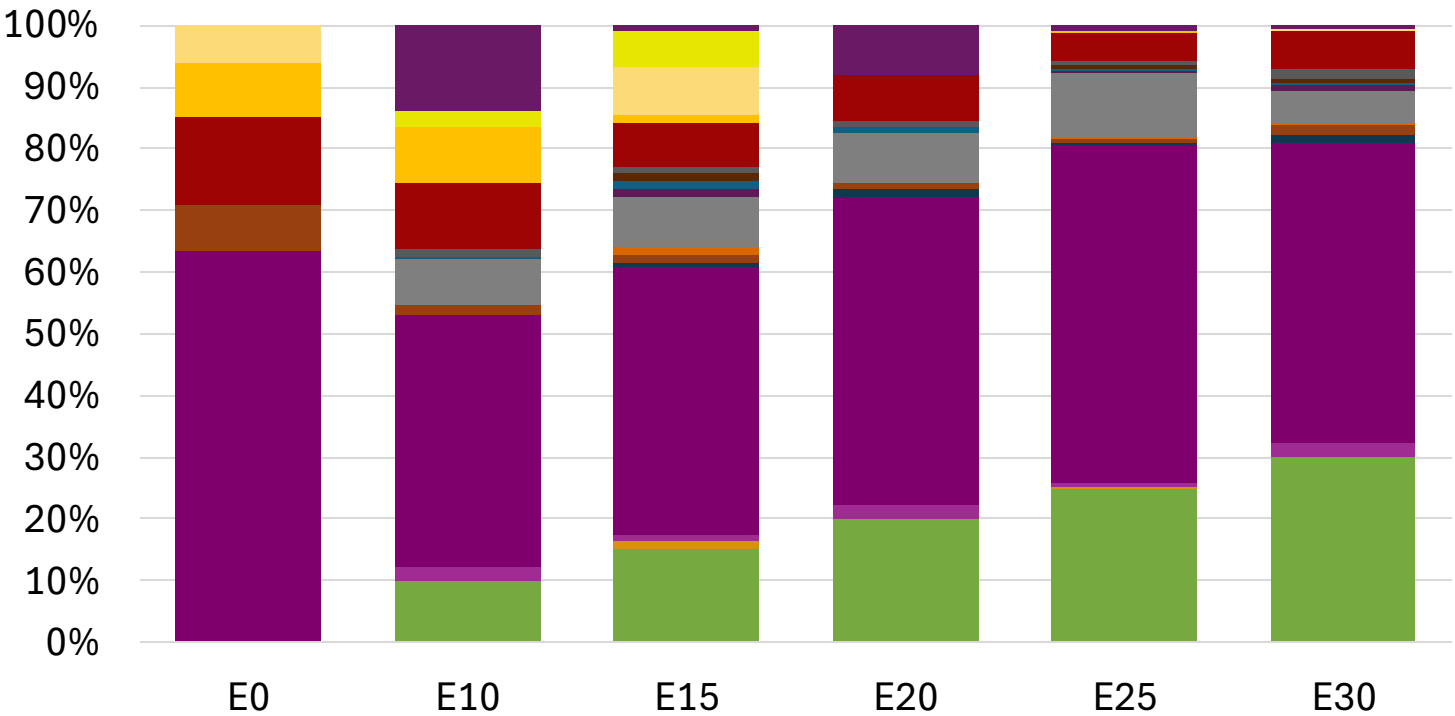

Average CIF 2024
Prices

Octane (RON)	98.0	99.0	100.9	101.2	102.8	104.1
Price (US\$/gal)	\$ 2.294	\$ 2.294	\$ 2.294	\$ 2.294	\$ 2.294	\$ 2.294

Source: Faro90

Vehicle Emission Impact for Ethanol Gasoline Blending

The model used in this analysis takes as a reference the [International Vehicle Emissions Model \(IVE\)](#).

The model uses the Base Emission Rates from IVE model, as well as its Adjustment Factors based on:


- Vehicle technology (cars, trucks, buses, motorcycles),
- Vehicle fleet average age,
- Average traveled distance per vehicle by country, as well as
- Geographical and climatic conditions (altitude, humidity, temperature).

Emissions of criteria pollutants, toxic pollutants, and greenhouse gases (GHG) were calculated and calibrated with emission inventories, using real gasoline quality data. The reduction rates for gasoline/ethanol blends were obtained from various sources (IPCC, US Grains, among others).


Emission estimations for different pollutants for gasoline and gasoline/ethanol blends (10%, 15%, 20%, 25% and 30% ethanol) were determined using the IVE Model. A comparison between the results and the European (Euro 6) requirements is made. Results are also compared with real emissions of the United States vehicle fleet*.

*Source: Bureau of transportation statistics.

Main Results

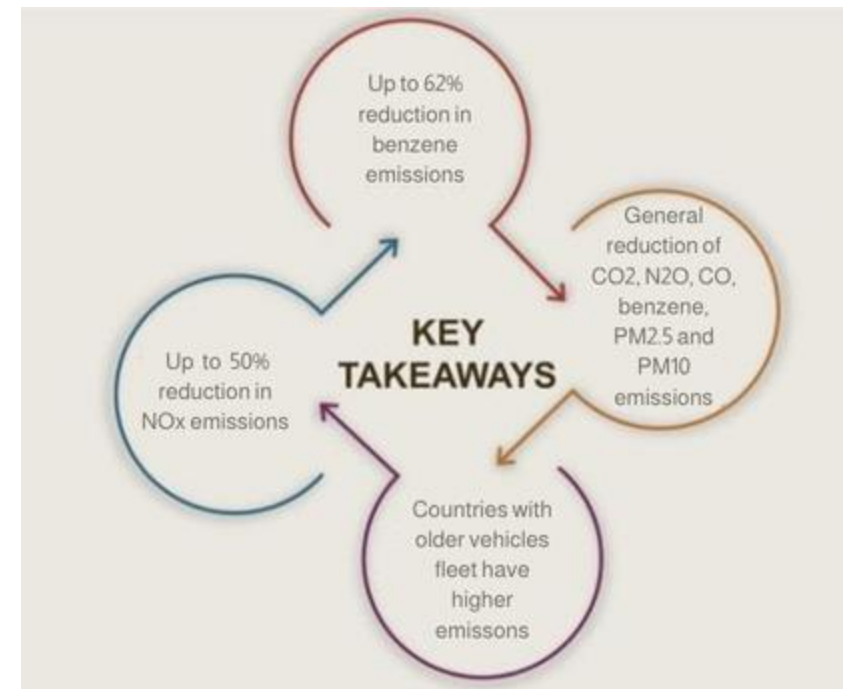

Gasoline Vehicle Fleet - Finland







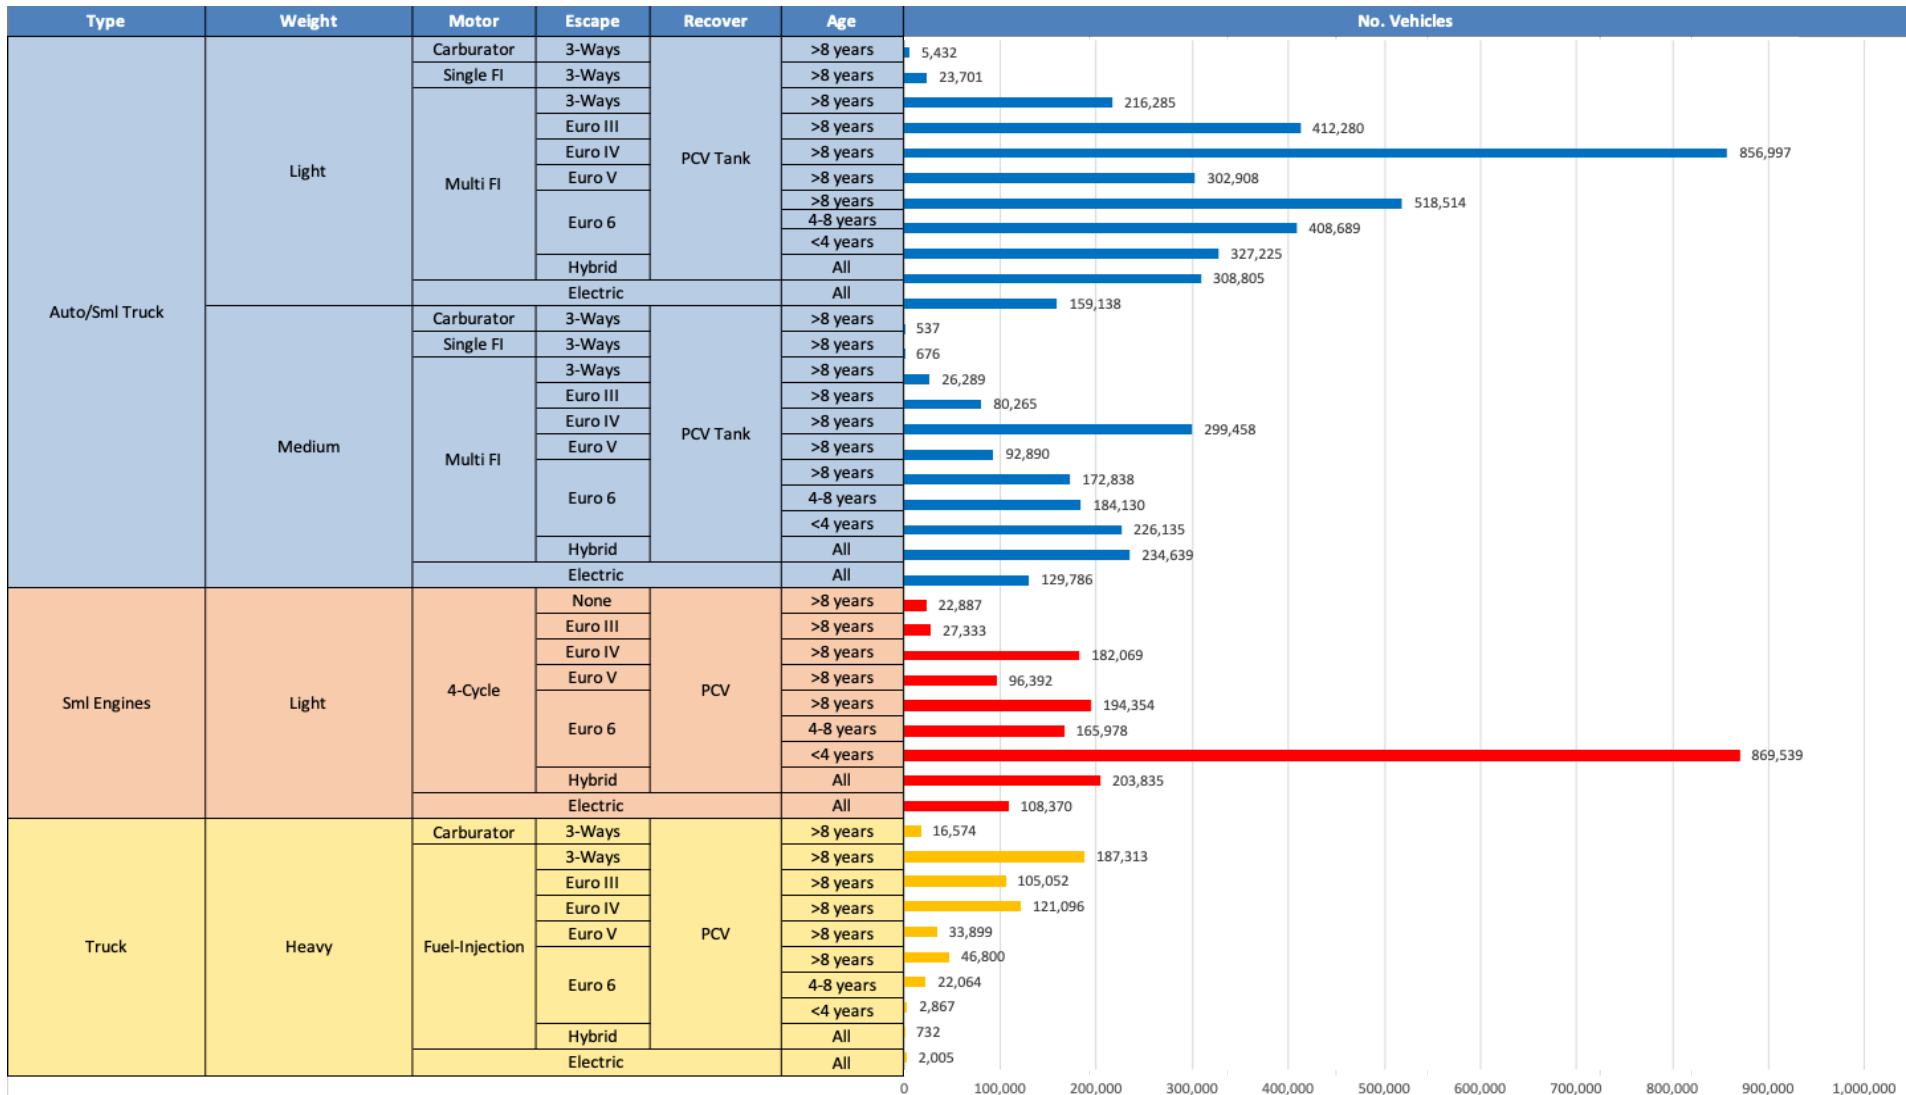


Vehicle Fleet: 7,396,775
Gasoline Vehicle Fleet: 3,837,401

Source: Eurostat, ACEA

France – Vehicular Emissions

TIER III BIN 125 United States
Euro 6 Standard

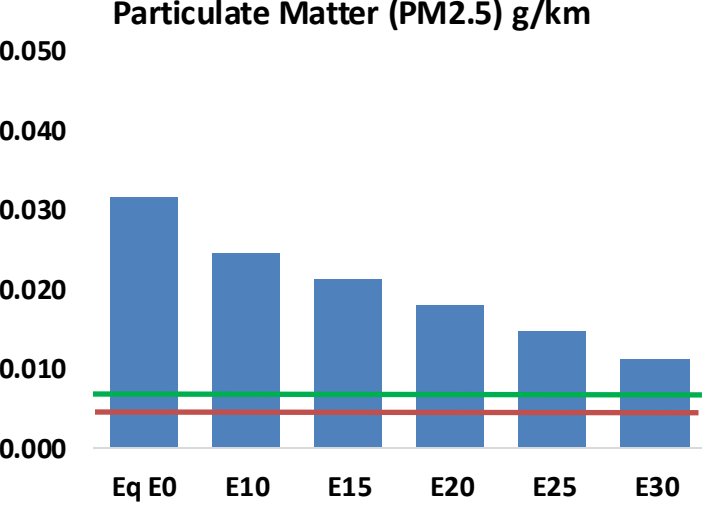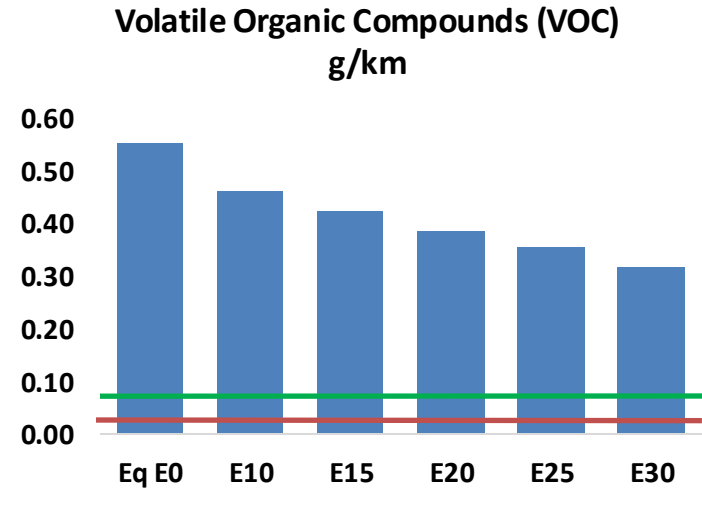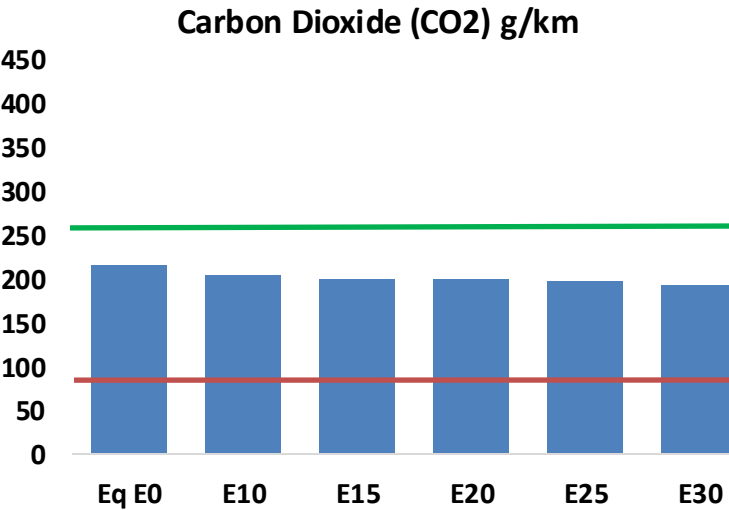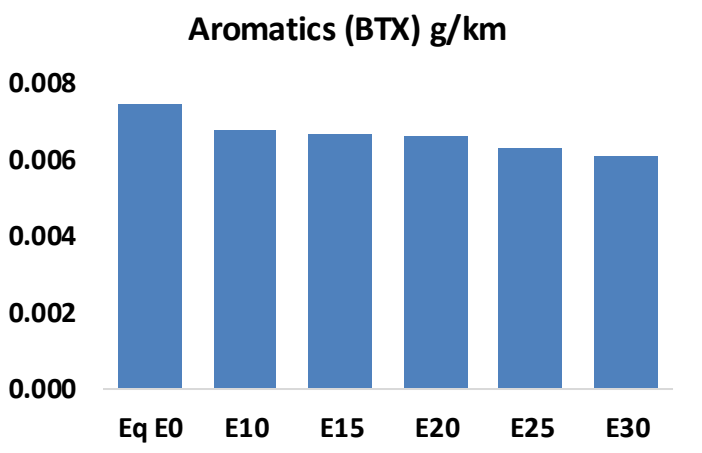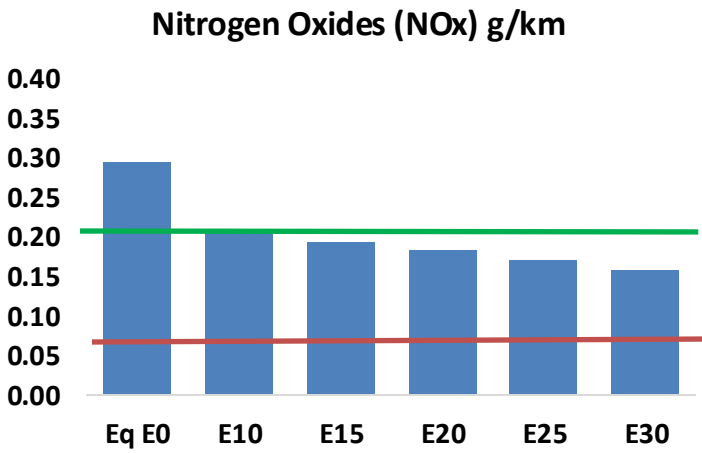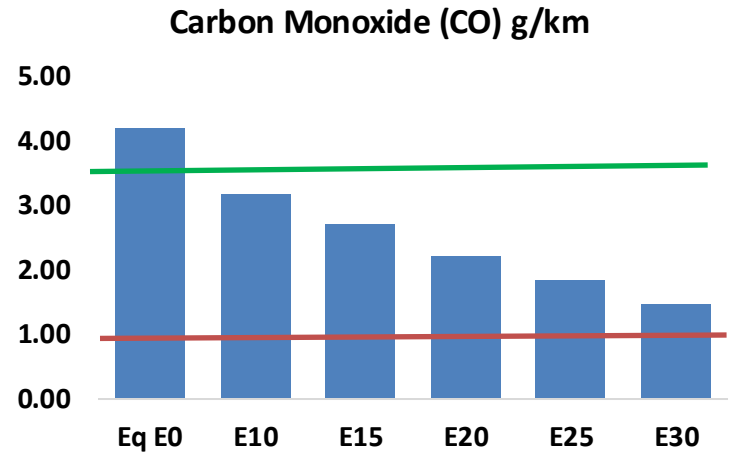

Finland – Vehicular Emissions

Vehicular Fleet Emissions (kg/day)	Eq E0	E5	E10	E15	E20	E25	E30	Reduction (%)	
								E10	E20
CO	469,869	408,719	347,570	292,577	234,989	190,028	145,320	-26%	-50%
CO2	19,452,404	18,952,199	18,479,784	18,108,243	17,924,390	17,818,561	17,490,113	-5%	-8%
VOC	114,075	103,064	92,053	82,593	72,871	65,335	55,493	-19%	-36%
NOx	27,517	20,638	19,262	18,154	17,121	15,982	14,777	-30%	-38%
SOx	221	204	188	174	160	145	130	-15%	-28%
NH3	7,866	7,788	7,710	7,747	7,834	7,895	7,946	-2%	0%
N2O	324	322	321	323	329	333	337	-1%	2%
CH4	22,977	22,977	22,977	23,322	23,828	24,264	24,678	0%	4%
Lead	-	-	-	-	-	-	-	0%	0%
Butadiene	467	434	400	373	347	326	299	-14%	-26%
Acetaldehyde	1,791	2,056	3,017	4,594	6,259	7,152	8,451	68%	249%
Formaldehyde	7,151	6,952	8,104	9,516	9,969	11,029	12,006	13%	39%
Benzene	1,102	1,059	1,003	987	979	936	906	-9%	-11%
PM2.5	1,230	1,092	954	828	703	571	433	-22%	-43%
PM10	4,504	3,999	3,494	3,035	2,577	2,091	1,585	-22%	-43%


Life Cycle GHG Emissions

The Global Agenda for Climate Action calls for countries, cities and regions, businesses, and members of civil society around the world to achieve a low-carbon and climate-resilient economies in support of the Paris Agreement. Road Transportation accounts for 15% of total GHG emissions (IPCC,2023).


Ethanol gasoline blends are an internationally adopted practice that offer significant short-term benefits. Biofuels are an important solution to achieve reduction targets in the transportation sector.

Country GHG emission reductions are calculated using **RED II/III** and **GREET** life cycle emission methodologies and the **International Vehicular Emissions Model (IVE)**. Results are compared to the current country targets for 2035. Current 2024 country emission are those published by **IPCC**.



Current GHG Global Emissions Distribution

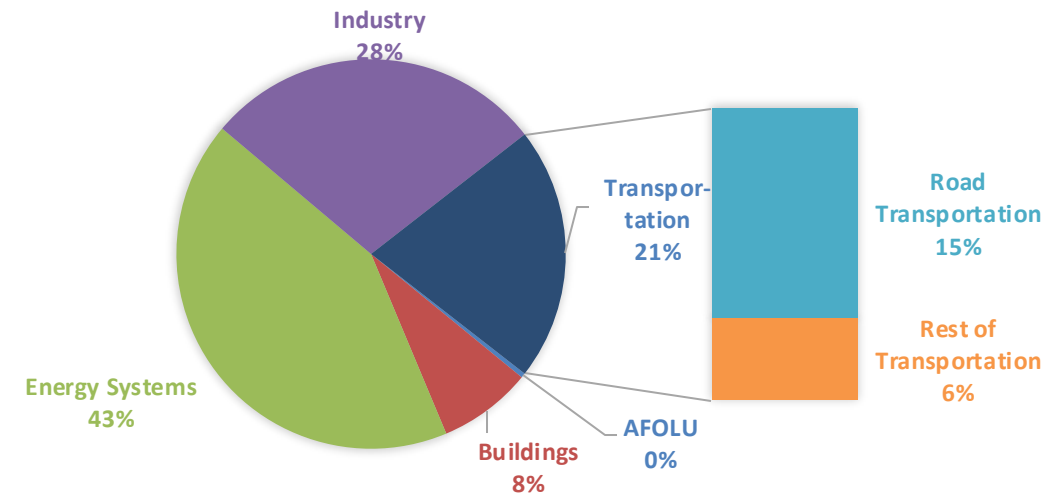

IPCC Transport Sector Sustainable Development Goals and climate policies Scenario, 2023

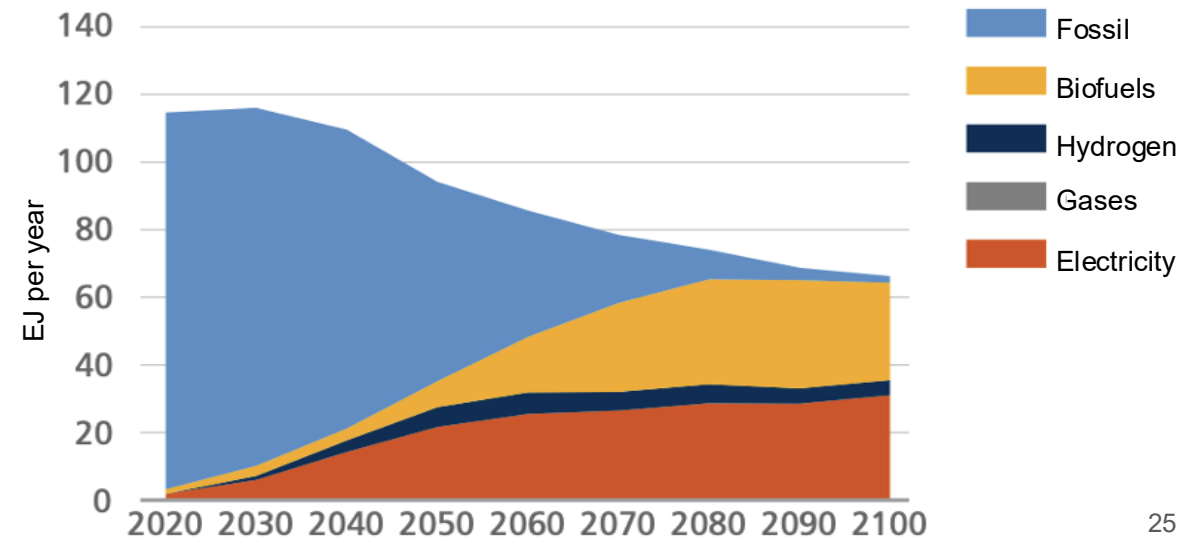

Finland – Gasoline Vehicle Fleet Life Cycle GHG Emissions

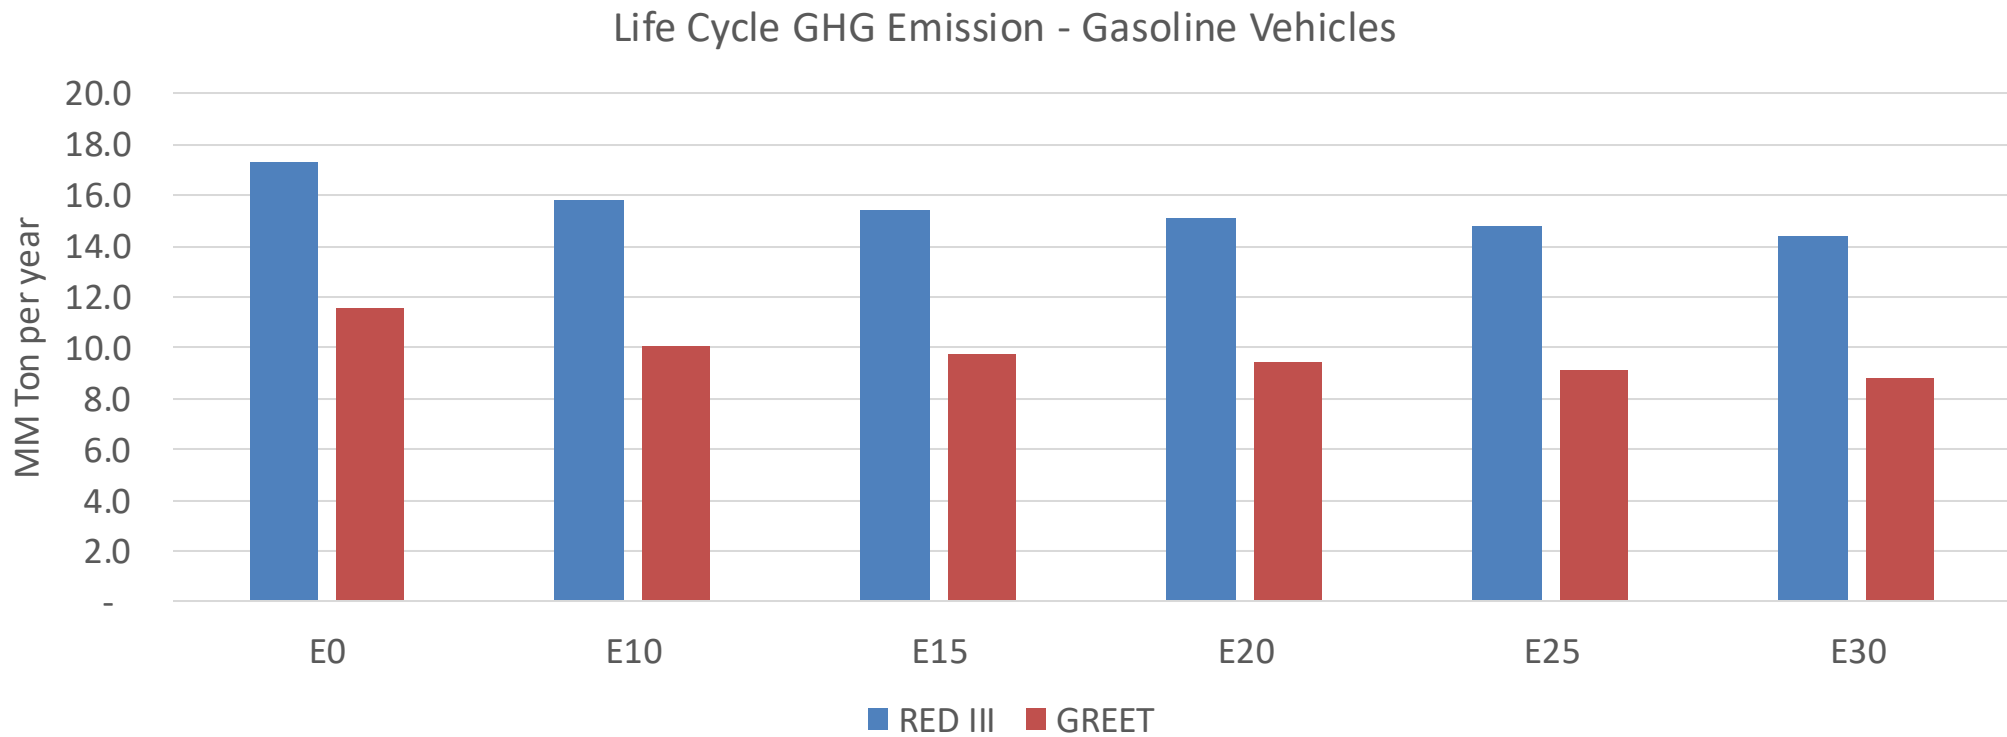

Country Emissions 2024 (MMT/año)	64.9
Target @ 2035 (MMT/year)	36.6
Delta	28.4

%Reduction vs E0	E0	E10	E15	E20	E25	E30
GREET 2024	0.0%	12.7%	15.9%	18.5%	21.0%	24.2%
RED II/III	0.0%	8.9%	11.3%	13.1%	14.9%	17.2%

% Target@2035	E0	E10	E15	E20	E25	E30
GREET 2024	0.0%	5.2%	6.5%	7.6%	8.6%	9.9%
RED II/III	0.0%	5.5%	6.9%	8.0%	9.1%	10.5%

Source: Greet, RED II/III, IPCC, climateactiontracker.org, F90