

Ethanol Blending in Gasoline - Peru

August 2025



**U.S. GRAINS &
BIOPRODUCTS
COUNCIL**

20 F St. NW, Suite 900 \ Washington, DC 20001
202-789-0789 \ www.grains.org

FARO90



www.faro90.com
+52 55 6122 2255

Ethanol Blending in Latin America

There are important fuel quality and environmental impact of vehicle emission challenges in the Region.

- The use of ethanol improves gasoline quality and creates flexibility in gasoline production.
- Ethanol use is a cost-effective way to increase gasoline octane and to replace more expensive gasoline components.
- Ethanol contributes to transport decarbonization and air quality improvement.
- There are opportunities across Latin America to increase the ethanol blend level and implement new policies on the use of gasoline-ethanol blends.

Sixteen countries with potential and additional use of ethanol were studied: 1) gasoline market profiles; 2) Optimization of gasoline blends with ethanol and 3) Environmental impact of gasolines blended with ethanol.



Ethanol Blending in Gasoline - Peru




In 2024, Peru gasoline consumption surpassed 900 million gallons (3,000 millions liters). Starting in 2023 a program to increase octane in gasoline was implemented; RON84 and RON 90 gasoline are commercialized as Regular gasoline (RON 91) with a 70% market participation. RON 95, RON 97 and RON 98 gasolines are now marketed as Premium gasoline (RON 96) with a 30% market share. Gasoline with ethanol (gasohol) is required to meet one additional octane number (RON 91 and RON 96 respectively). Local gasoline supply is done with production from Petroperú, Repsol and Primax. Gasoline imports account for 10 to 15% of demand, and are supplied by local markets, United states and Europe.

Blends with 7.8% v/v are allowed (Decreto Supremo N.° 021-2007-EM: MINEM). Peru produces ethanol from sugarcane; however, its destination is mainly the EU market. Ethanol imports from the United States and to a lesser degree from Brazil are used for the national blend.

Source: MEM, 2024

Gasoline Demand in Peru


Gasoline Demand by Grade in Peru

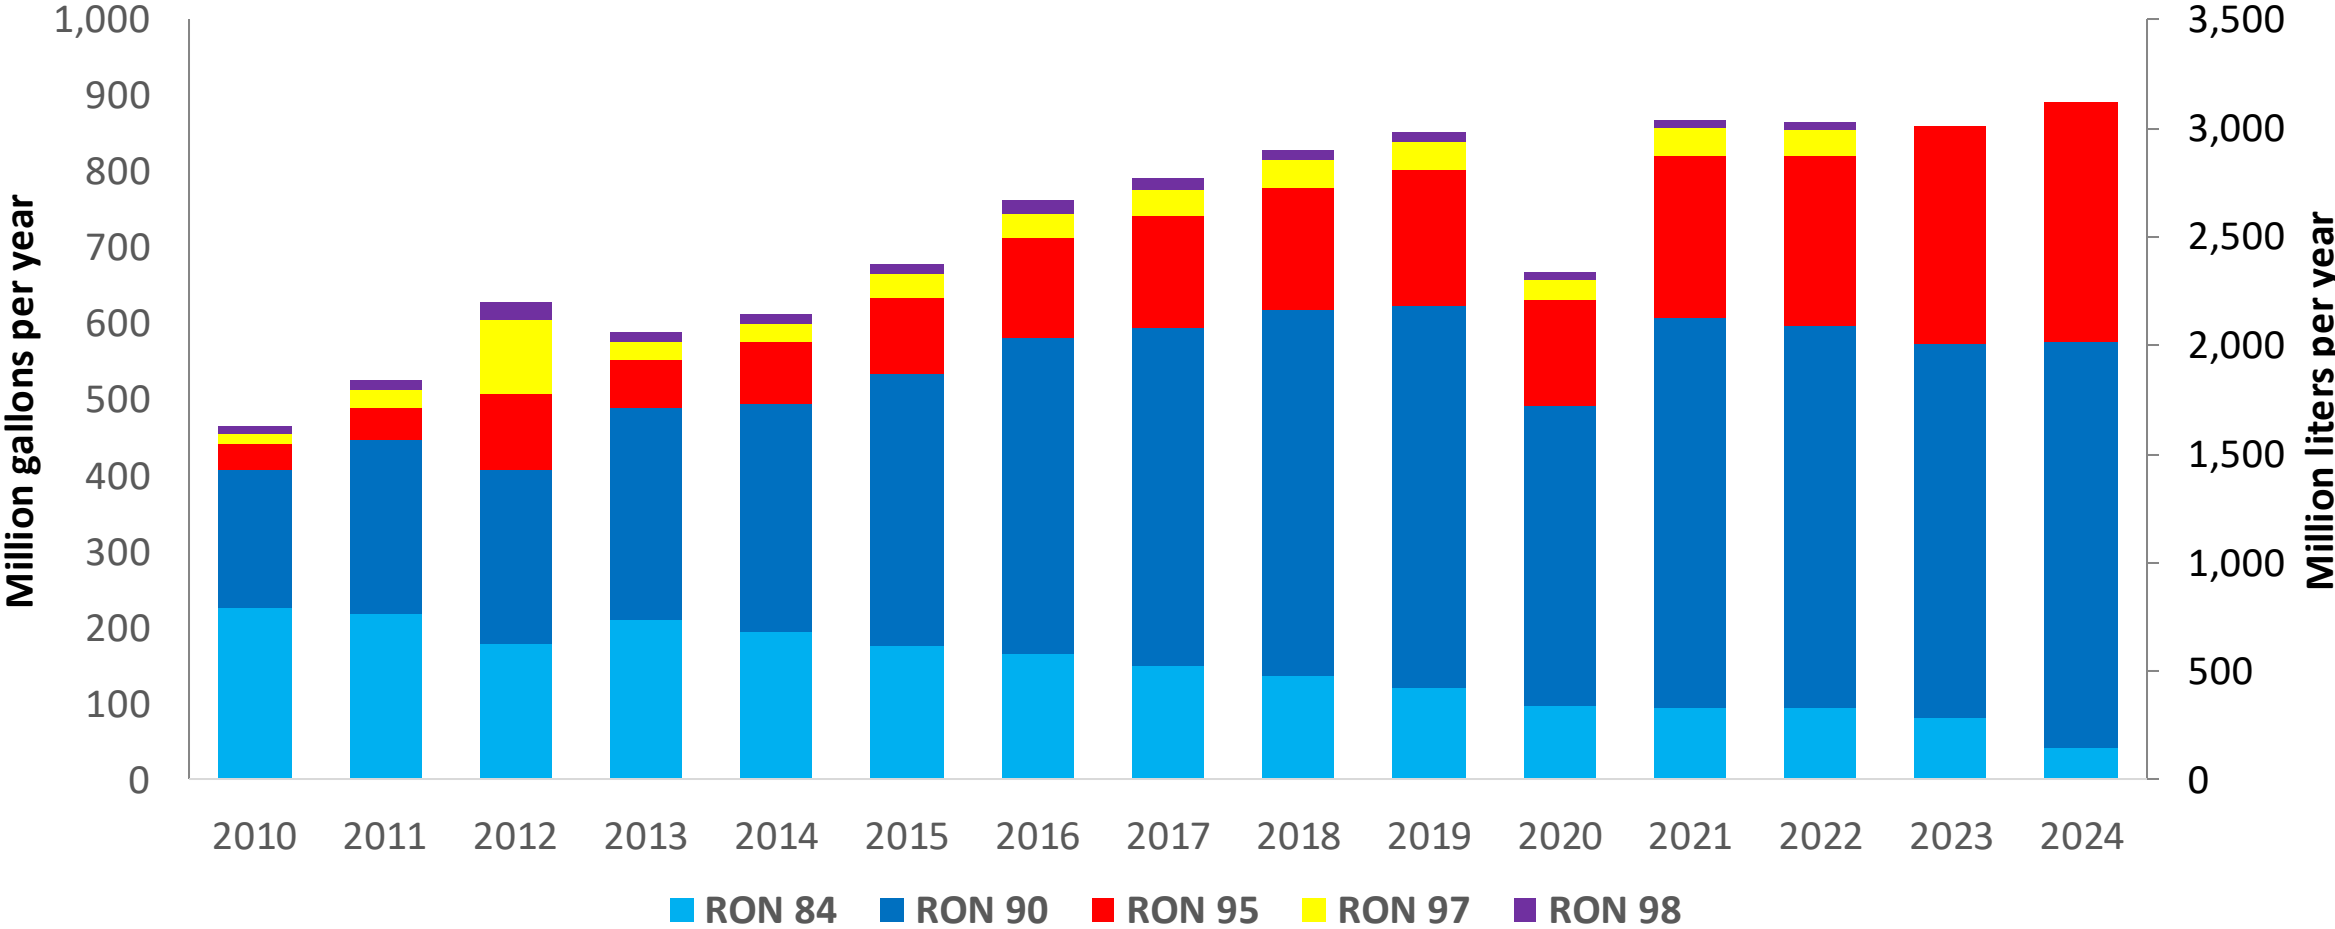

Since 2023, RON 90 is commercialized as Regular Gasoline (RON 90-91) and RON 95, RON 97 and RON 98 are now marketed as Premium Gasoline (RON 95-96).

Source: MINEM, 2024

Gasoline Production in Peru

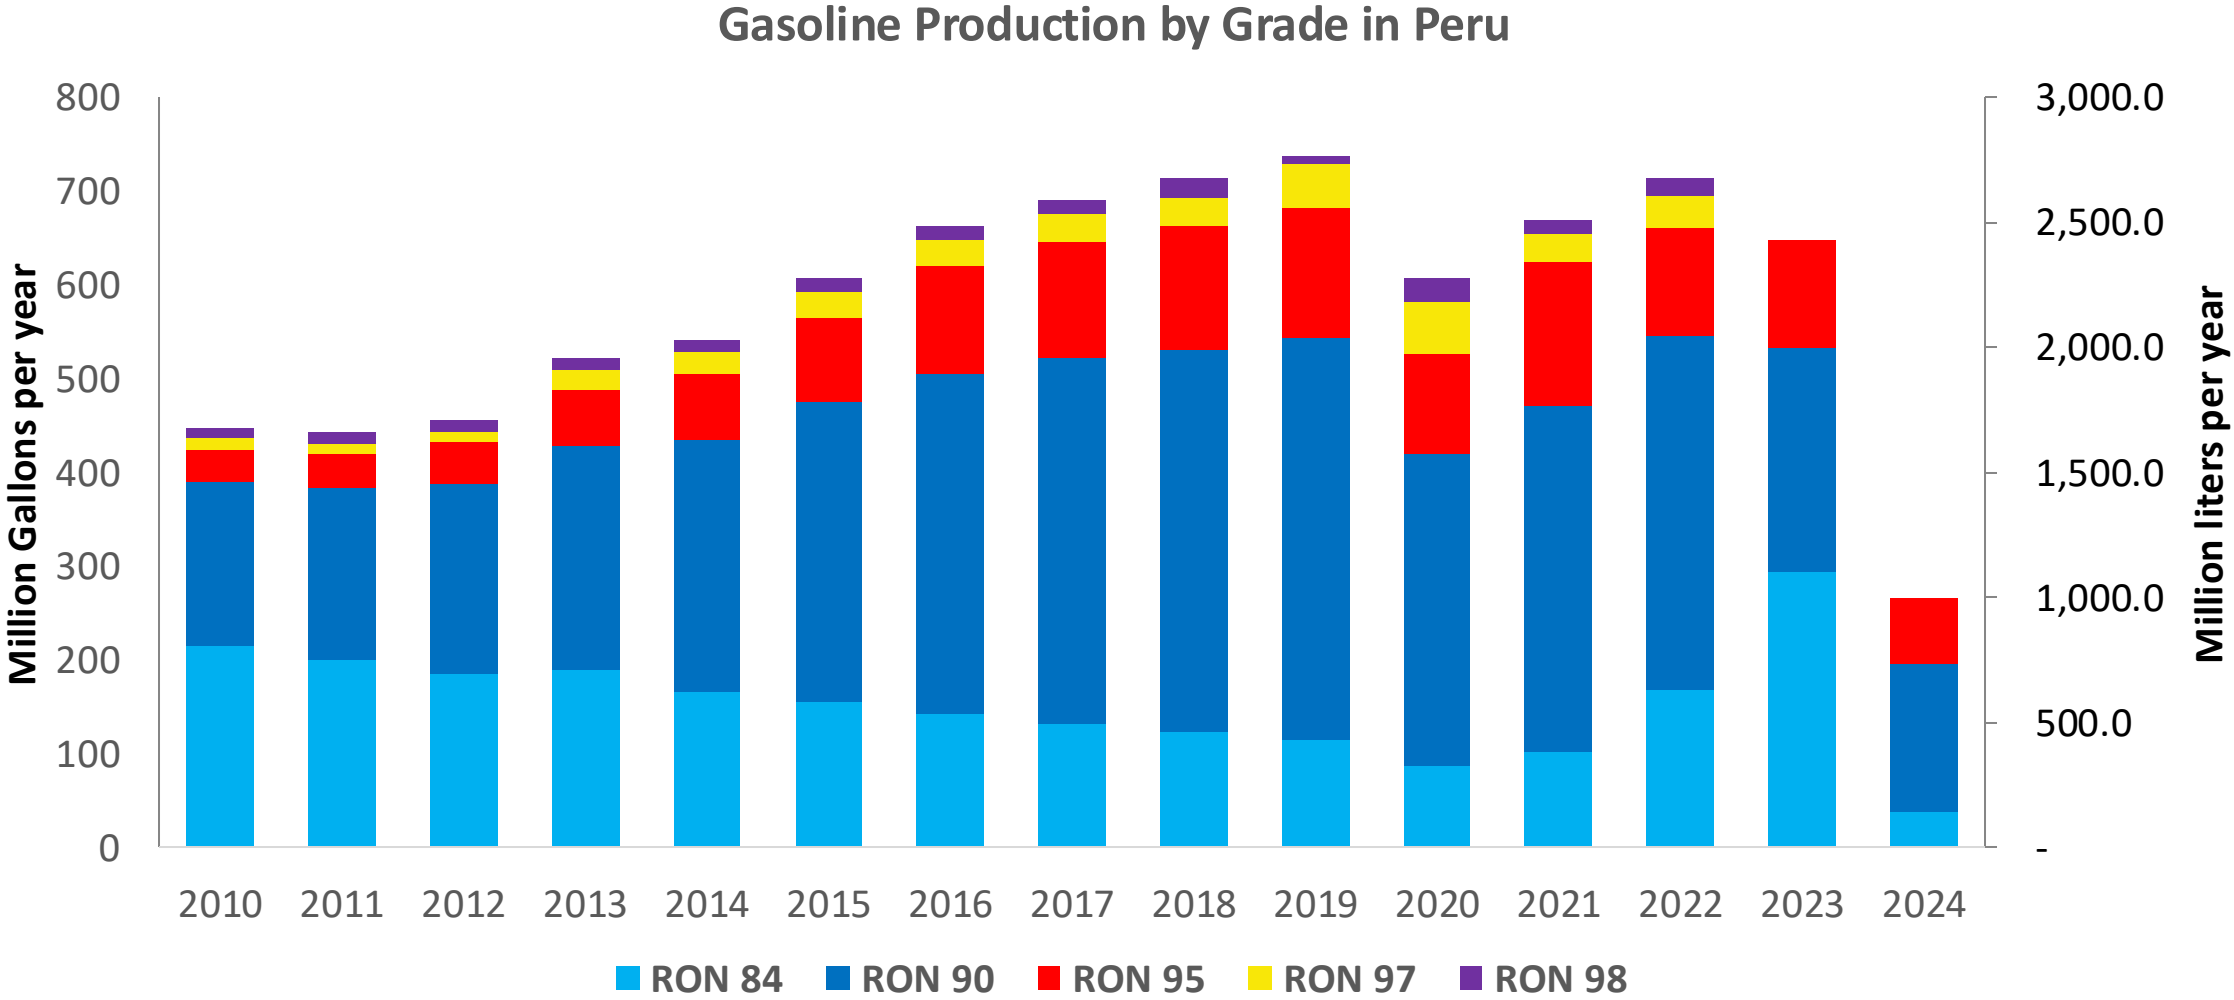

Since 2023, RON 90 is commercialized as Regular Gasoline (RON 90-91) and RON 95, RON 97 and RON 98 are now marketed as Premium Gasoline (RON 95-96).

Source: MINEM, 2024


The FARO90 logo is shown in a blue box, followed by a chemical structure of a substituted cyclohexadiene. The structure features a six-membered ring with two double bonds. Substituents include a methyl group, a propyl group, and a group labeled 'X'. The letters 'H', 'C', and 'X' are highlighted in orange in the original image.

The chart displays the projected production of three types of petroleum products from 2010 to 2024. The data is presented as stacked bars, with the left Y-axis representing production in Million gallons per year (0 to 500) and the right Y-axis representing production in Million liters per year (0 to 1,600). The legend indicates three categories: Low Octane Naphta (Cracked) in blue, High Octane Naphta (HOGBS) in red, and High Octane Gasoline in purple.

Year	Low Octane Naphta (Cracked) (Million gallons per year)	High Octane Naphta (HOGBS) (Million gallons per year)	High Octane Gasoline (Million gallons per year)
2010	40	10	5
2011	35	10	5
2012	30	10	10
2013	100	30	10
2014	100	30	10
2015	165	60	5
2016	230	80	0
2017	250	95	5
2018	225	85	20
2019	230	65	0
2020	290	55	0
2021	310	60	0
2022	145	50	5
2023	310	35	110
2024	310	0	180

3

Production and Demand of Ethanol in Peru

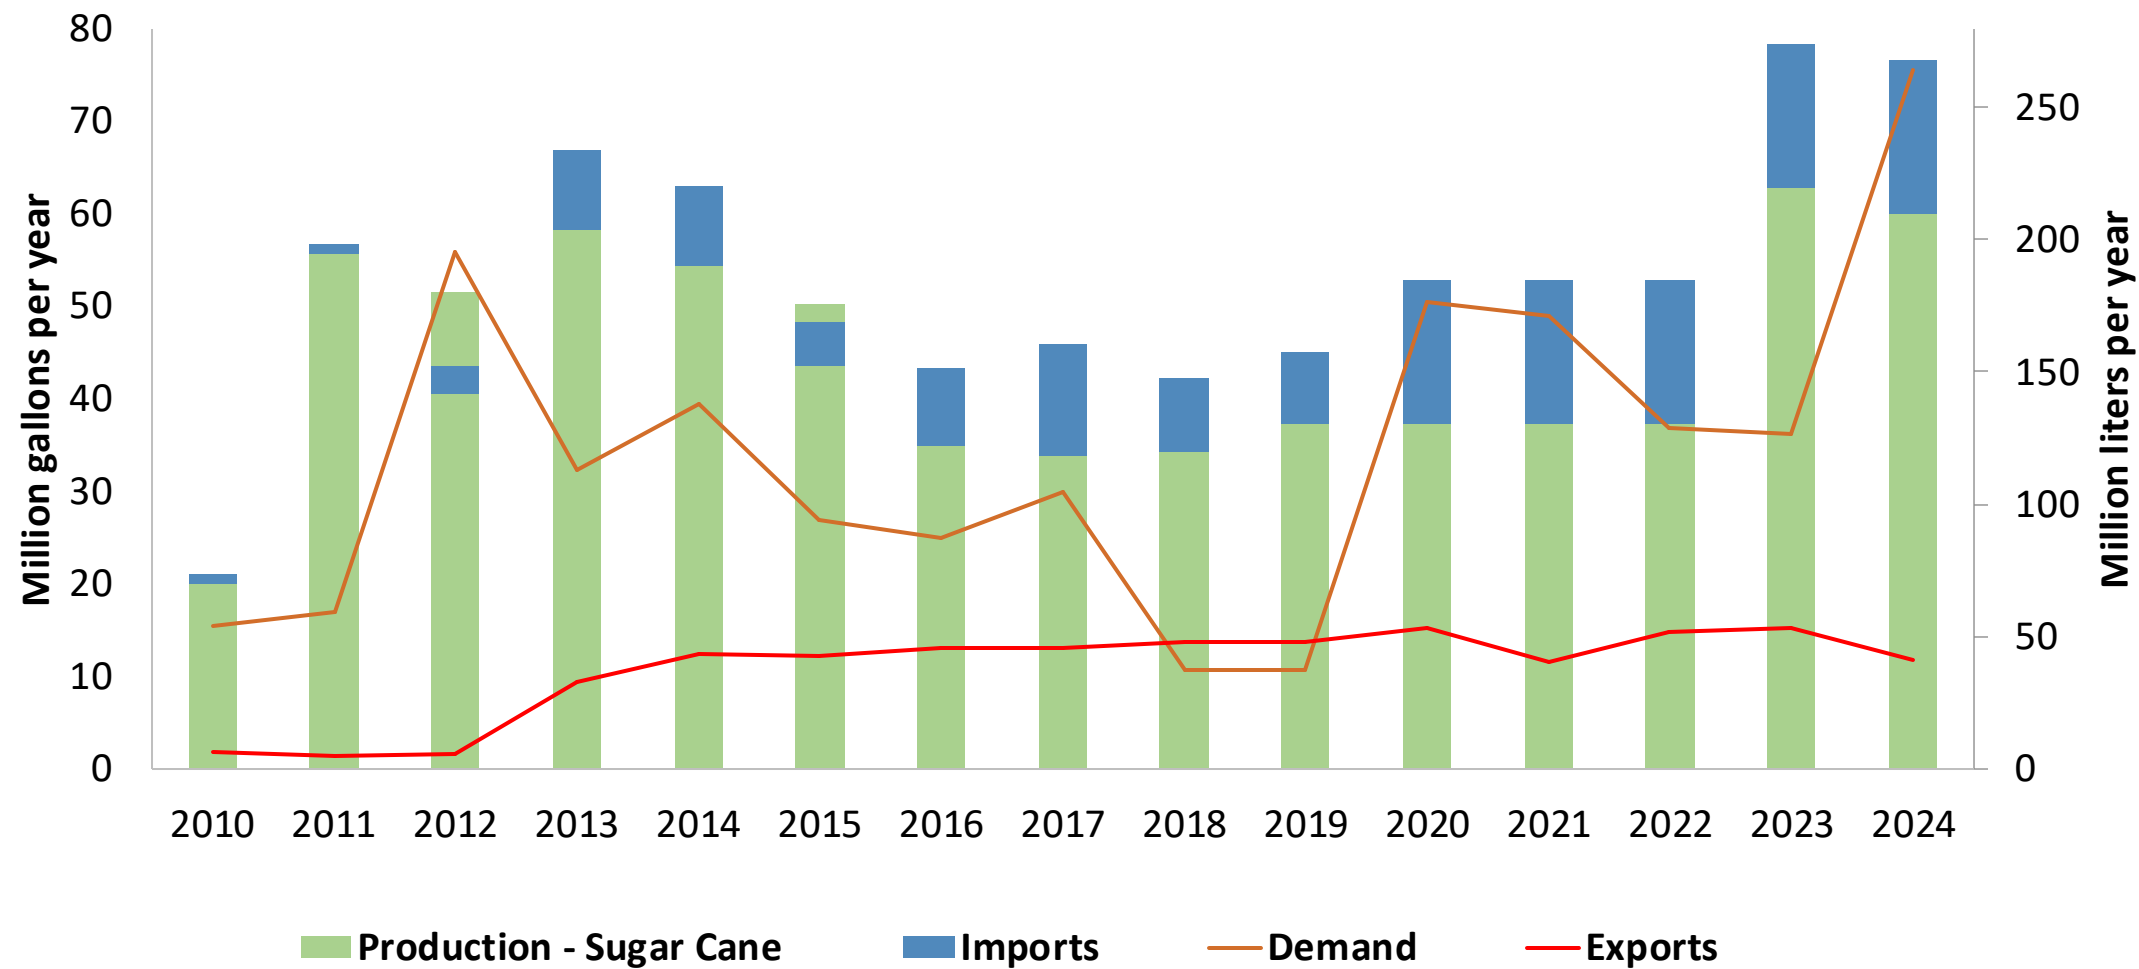

Source: MINEM, 2024


Gasoline Quality in Peru

Name	Ministerial Resolution N° 469-2021-MINEM/DM				EN 228:2012 + A1:2017 (Euro 6 enabling)			
Implementation Date	2021				2017			
Applicability	Whole contry	Whole contry	Whole contry	Whole contry	All countries			
Selected Grade	Gasolina Regular	Gasolina Premium	Gasohol Regular	Gasohol Premium	RON 95 E5	RON 95 E10	RON 98 E5	RON 98 E10
Benzene Content	< 2% v/v	< 2% v/v	< 2% v/v	< 2% v/v	< 1 %v/v	< 1 %v/v	< 1 %v/v	< 1 %v/v
Aromatics	< 45% v/v	< 45% v/v	< 45% v/v	< 45% v/v	< 35 %v/v	< 35 %v/v	< 35 %v/v	< 35 %v/v
Olefins	< 25% v/v	< 25% v/v	< 25% v/v	< 25% v/v	< 18 %v/v	< 18 %v/v	< 18 %v/v	< 18 %v/v
Lead Content	< 0,013 g/l	< 0,013 g/l	< 0,013 g/l	< 0,013 g/l	< 5 mg/l	< 5 mg/l	< 5 mg/l	< 5 mg/l
Manganese	< 0,25 mg/l	< 0,25 mg/l	< 0,25 mg/l	< 0,25 mg/l	< 2,0 mg/l	< 2,0 mg/l	< 2,0 mg/l	< 2,0 mg/l
RON	> 90	> 95	> 91	> 96	> 95	> 95	> 98	> 98
MON	-	-	-	-	> 85	> 88	> 85	> 88
AKI								
Sulfur Content	< 50 mg/kg	< 50 mg/kg	< 50 mg/kg	< 50 mg/kg	< 10 mg/kg	< 10 mg/kg	< 10 mg/kg	< 10 mg/kg
Oxygen Content	Reportar	Reportar	< 3,45 %m/m	< 3,45 %m/m	<2,7 % m/m	<3,7 % m/m	<2,7 % m/m	<3,7 % m/m
Ethanol (EtOH)			< 7,8 %v/v	< 7,8 %v/v	<5 %v/v	<10 %v/v	<5 %v/v	<10 %v/v
RVP 37.8°C (Summer)	< 76 kPa	< 76 kPa	< 76 kPa	< 76 kPa	<> 60 - 70 kPa *Depends on the country, RVP is regulated in the EU Fuel Quality Directive			
RVP 37.8 °C(Winter)								
RVP 37.8°C (Transition)								
MTBE					-	-	-	-
Ethers 5 or more C Atoms	-	-	-	-	Based on oxygen content	<22 %v/v	Based on oxygen content	<22 %v/v

Source: MINEM, 2023

Gasoline Component Blending in Latin America

Gasoline is a blend of a base gasoline and other components. This blending is usually done at blending terminals as only 30% of the world's finished gasoline is distributed directly from refineries. Each component provides different properties to the final blend, for example, isomerates, alkylates and butanes increase the octane. The components commonly used in Latin America are:

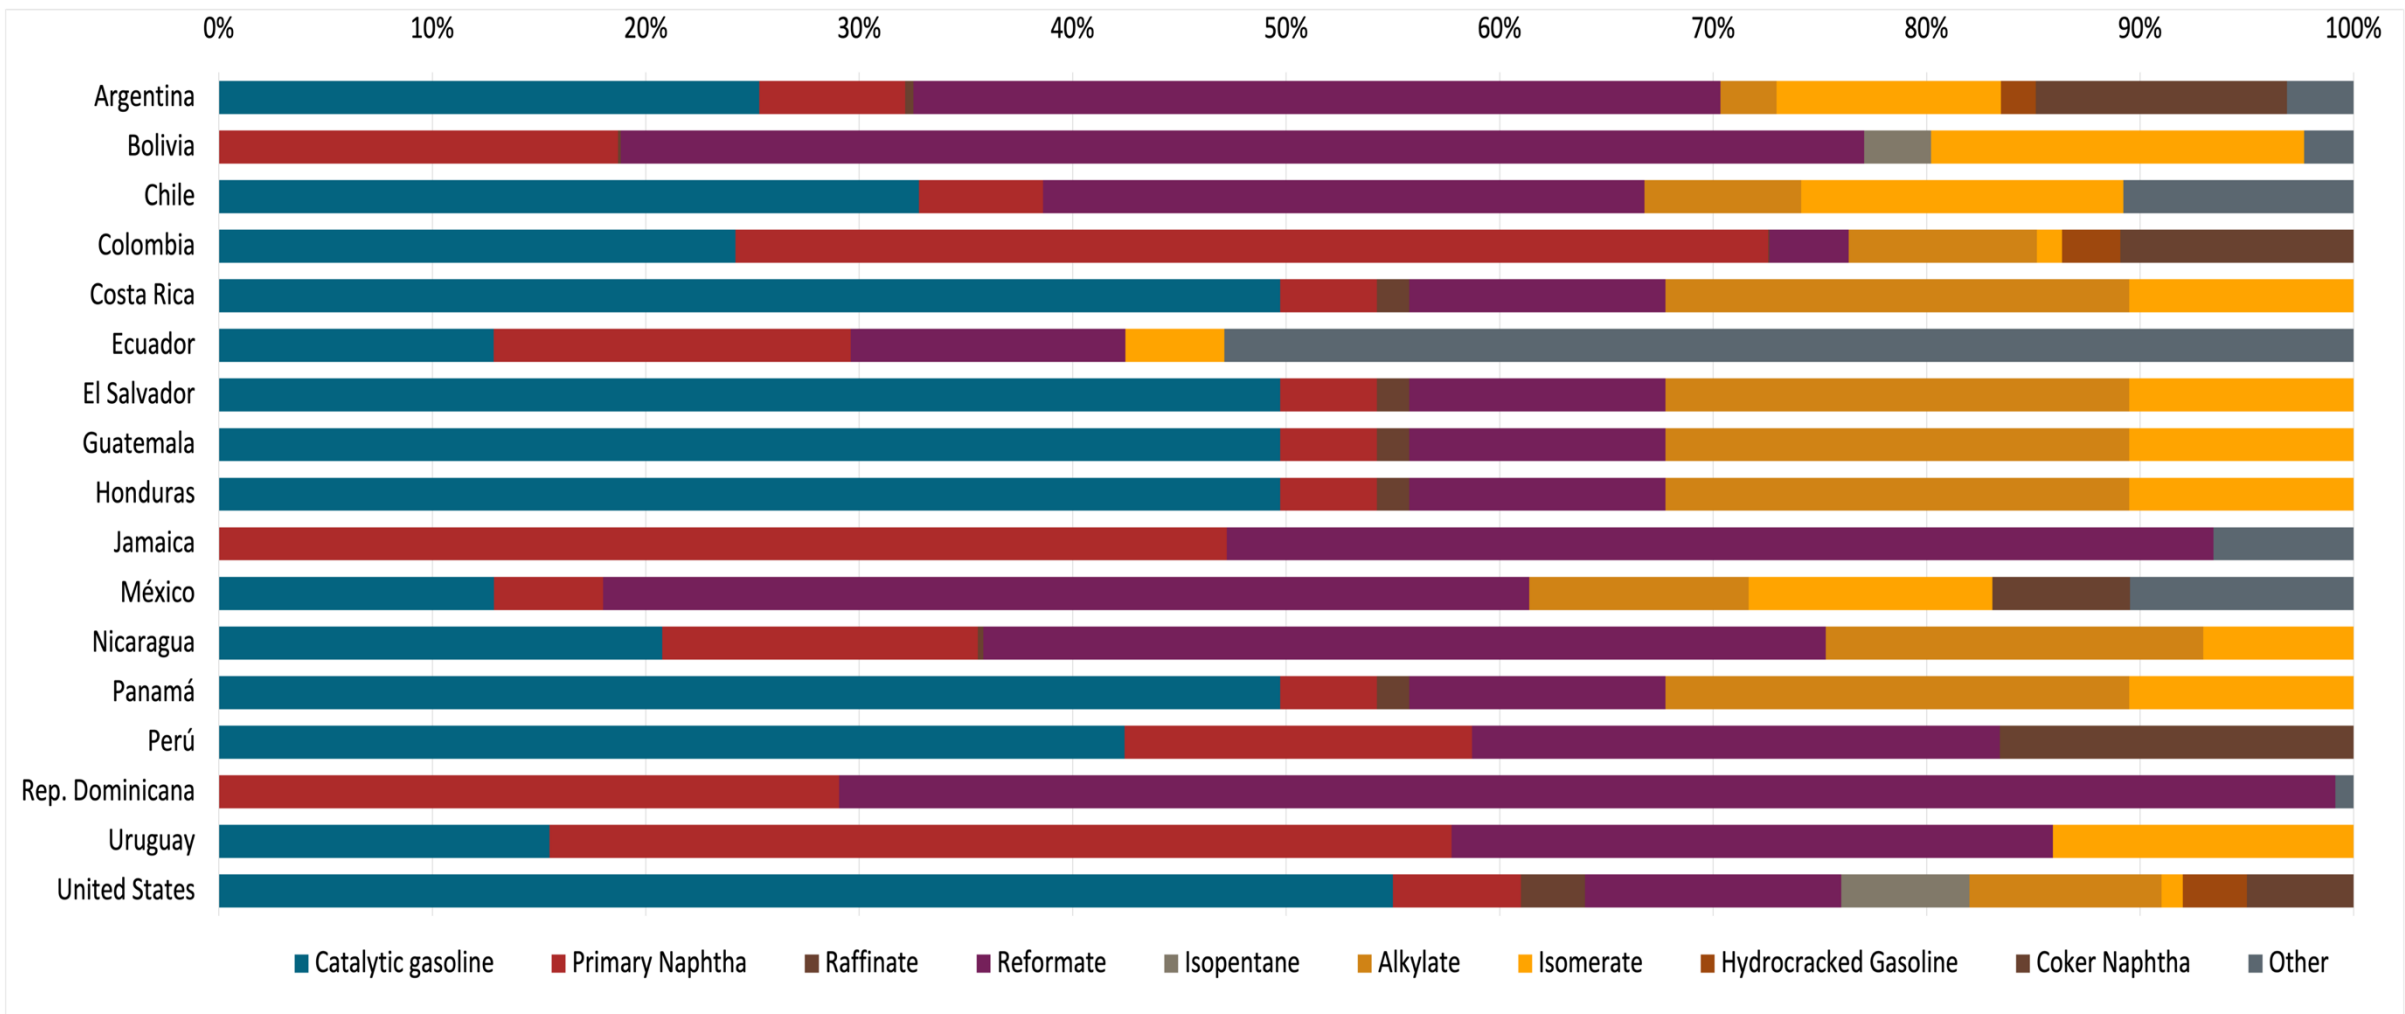


Gasoline Blending Optimization

In some parts of the world, ethanol is added to gasoline as a blending component. The advantages of ethanol include that it is a renewable fuel made of biomass; that it is an octane booster that helps to dilute sulfur; and that it allows the fulfillment of environmental objectives. To determine the optimal components to be blended with ethanol, a **blending model** was used. This model selects the components to add in the gasoline/ethanol blend based on:


- Components prices,
- Properties each component affects,
- Quality parameters by country, and
- Component availability by country.

Through iterations, the model obtains the %v/v of the components to be blended with 10%, 15%, 20%, 25% and 30% of ethanol, in such a way that the final blend complies with the required properties of a finished gasoline by country.


The blending model uses gasoline component spot average prices 2024 and provides fuel prices that do not include country distribution costs, local taxes and subsidies and import or gas station margins.

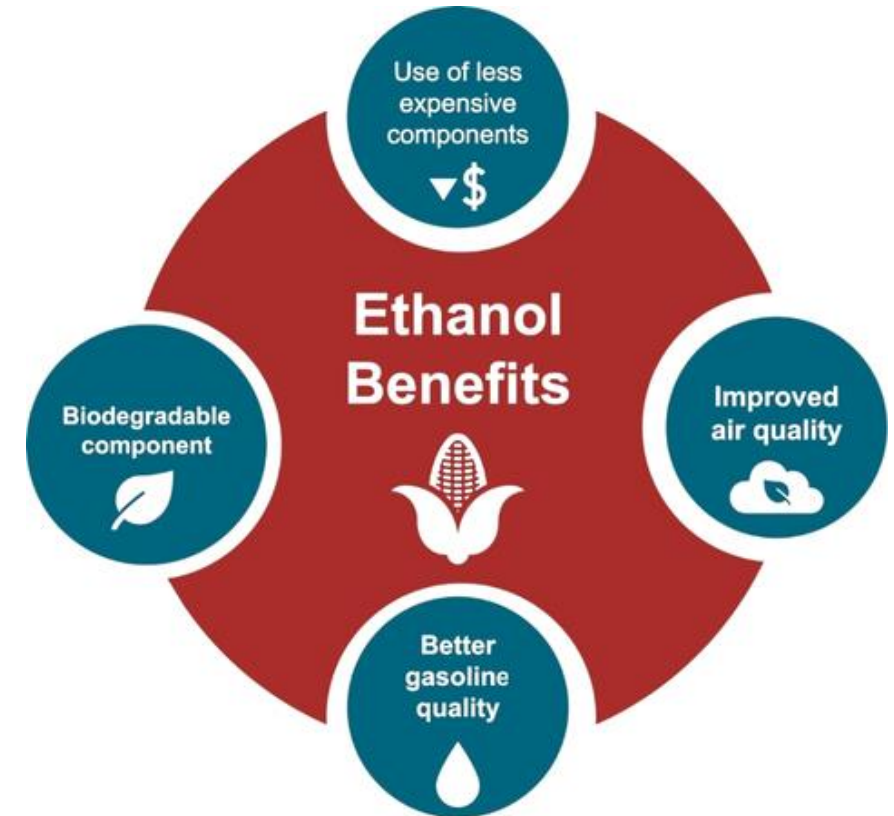

Available Blending Components

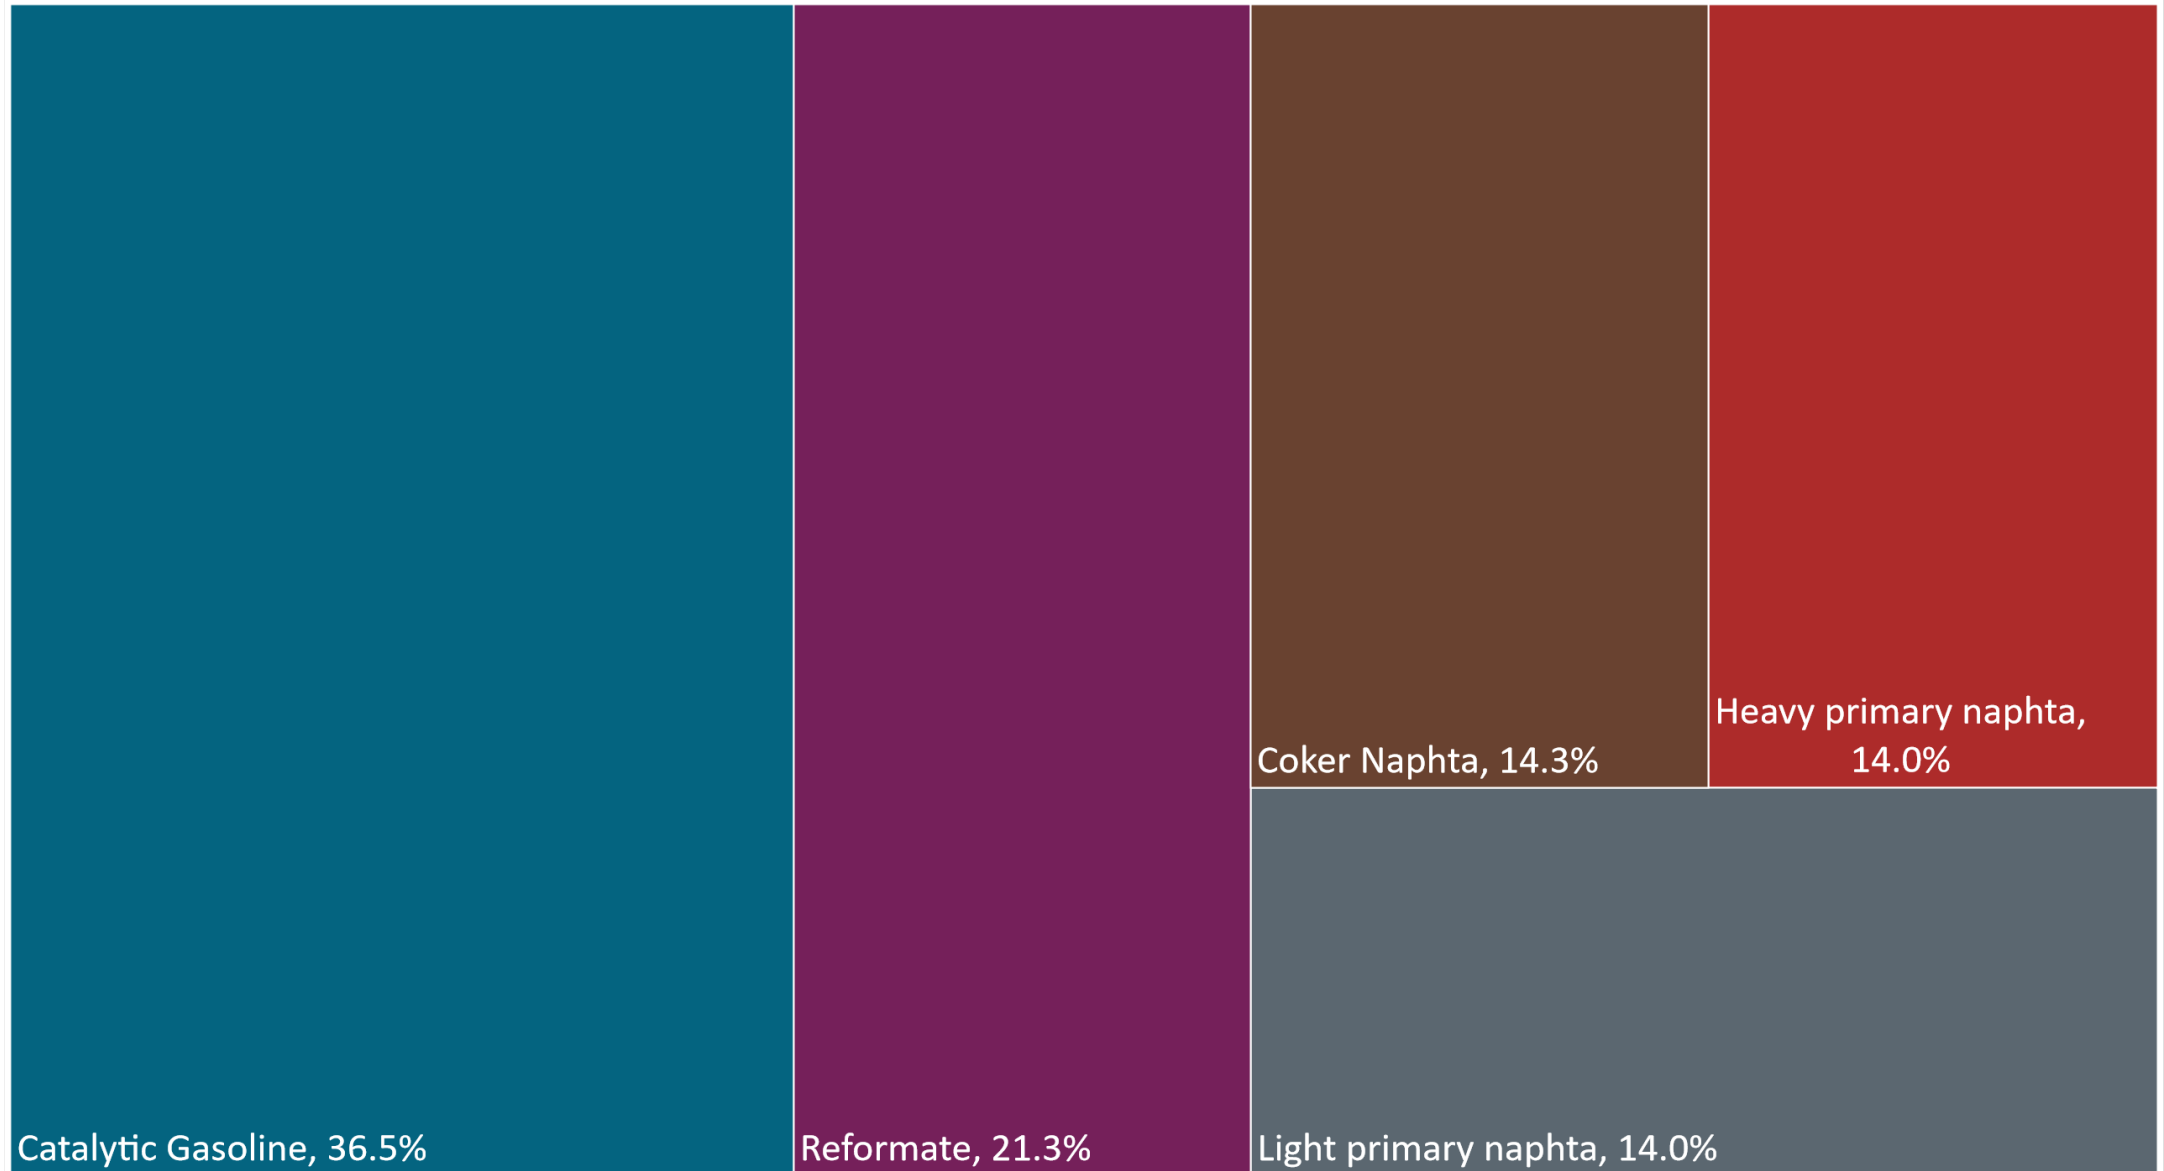


Peru – Regular – Constant Octane

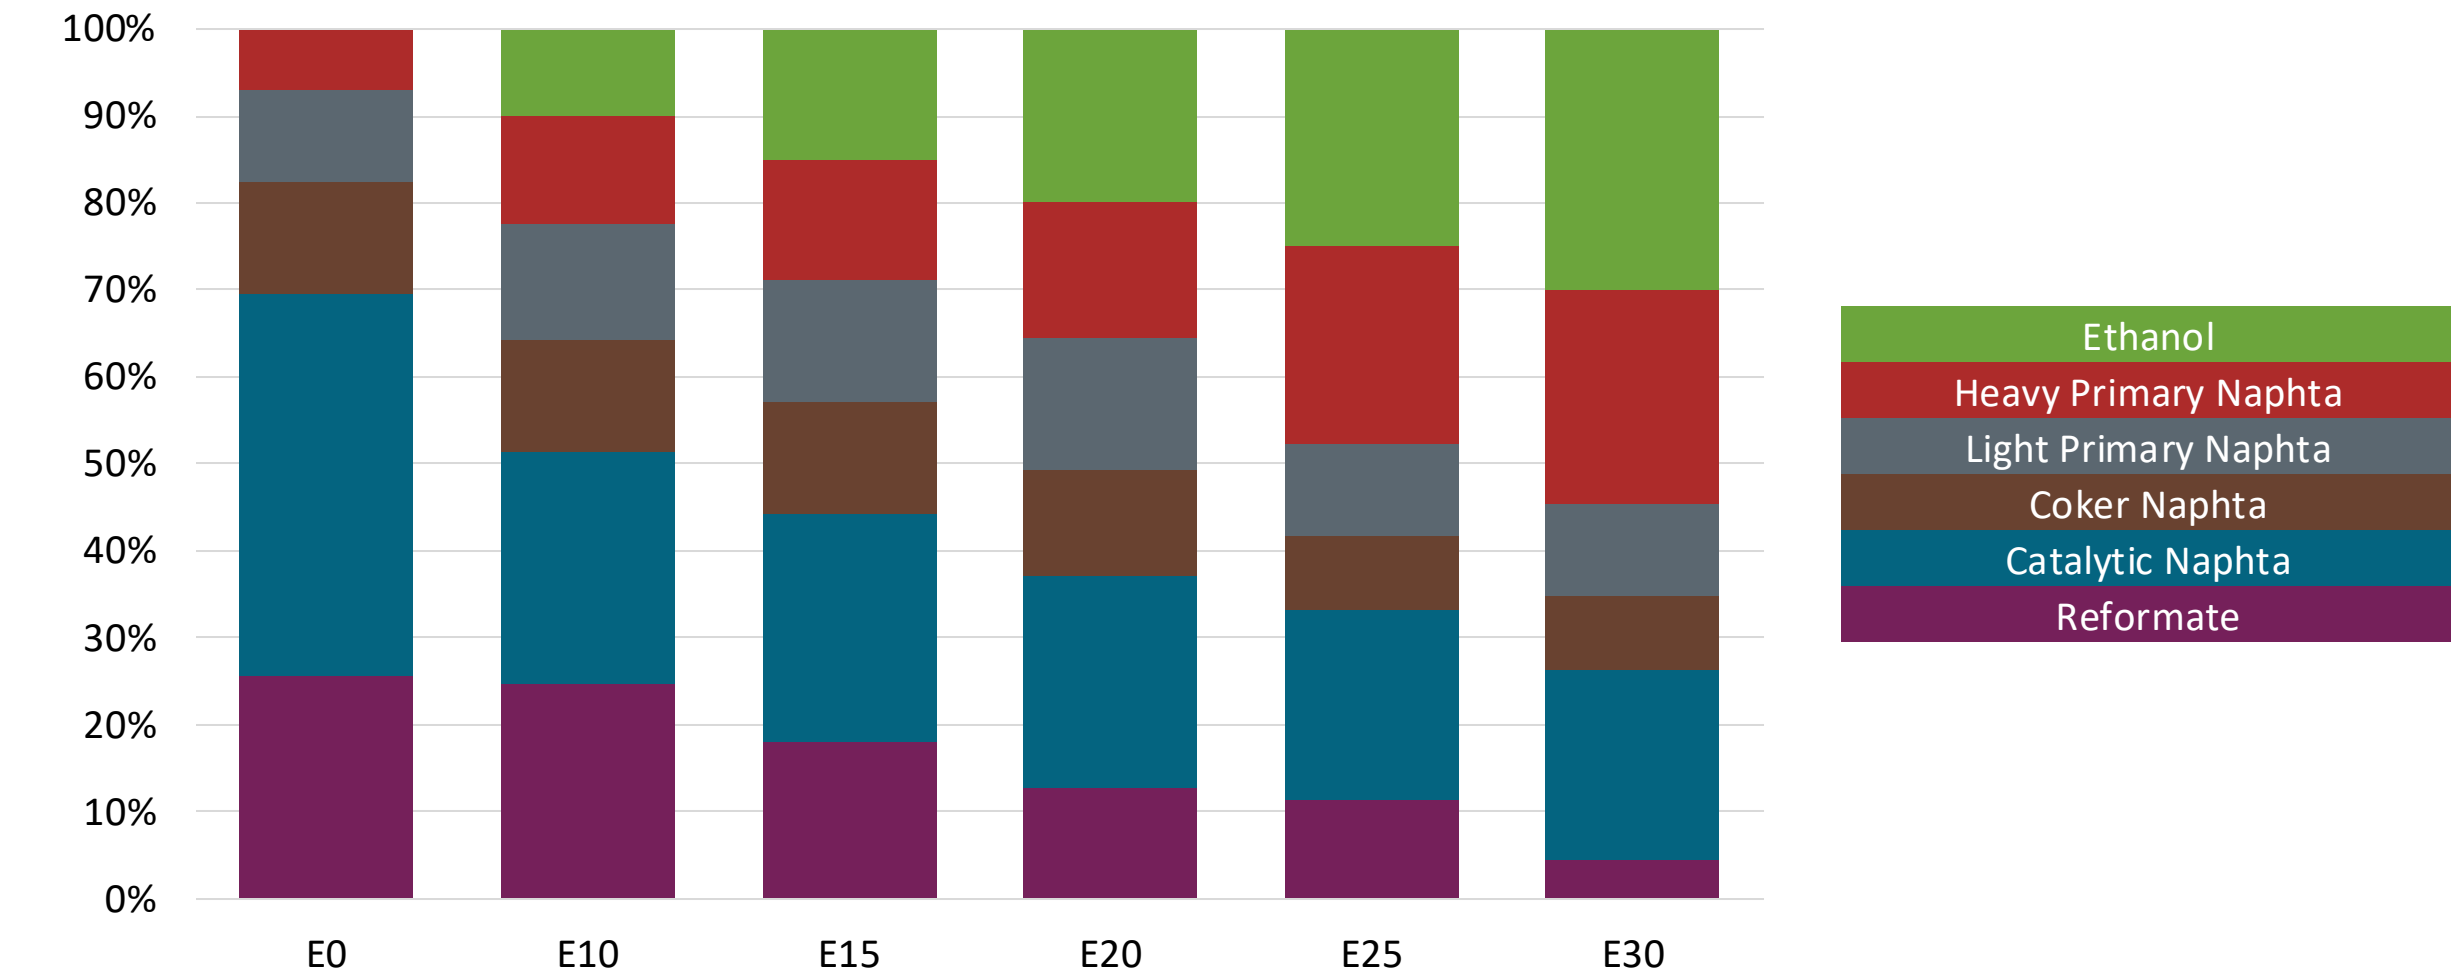

Octane (RON)	90.0	90.0	90.0	90.0	90.0	90.0
Price (US\$/gal)	\$ 2.412	\$ 2.242	\$ 2.155	\$ 2.070	\$ 1.995	\$ 1.908

Source: Faro90


Peru – Premium – Constant Octane

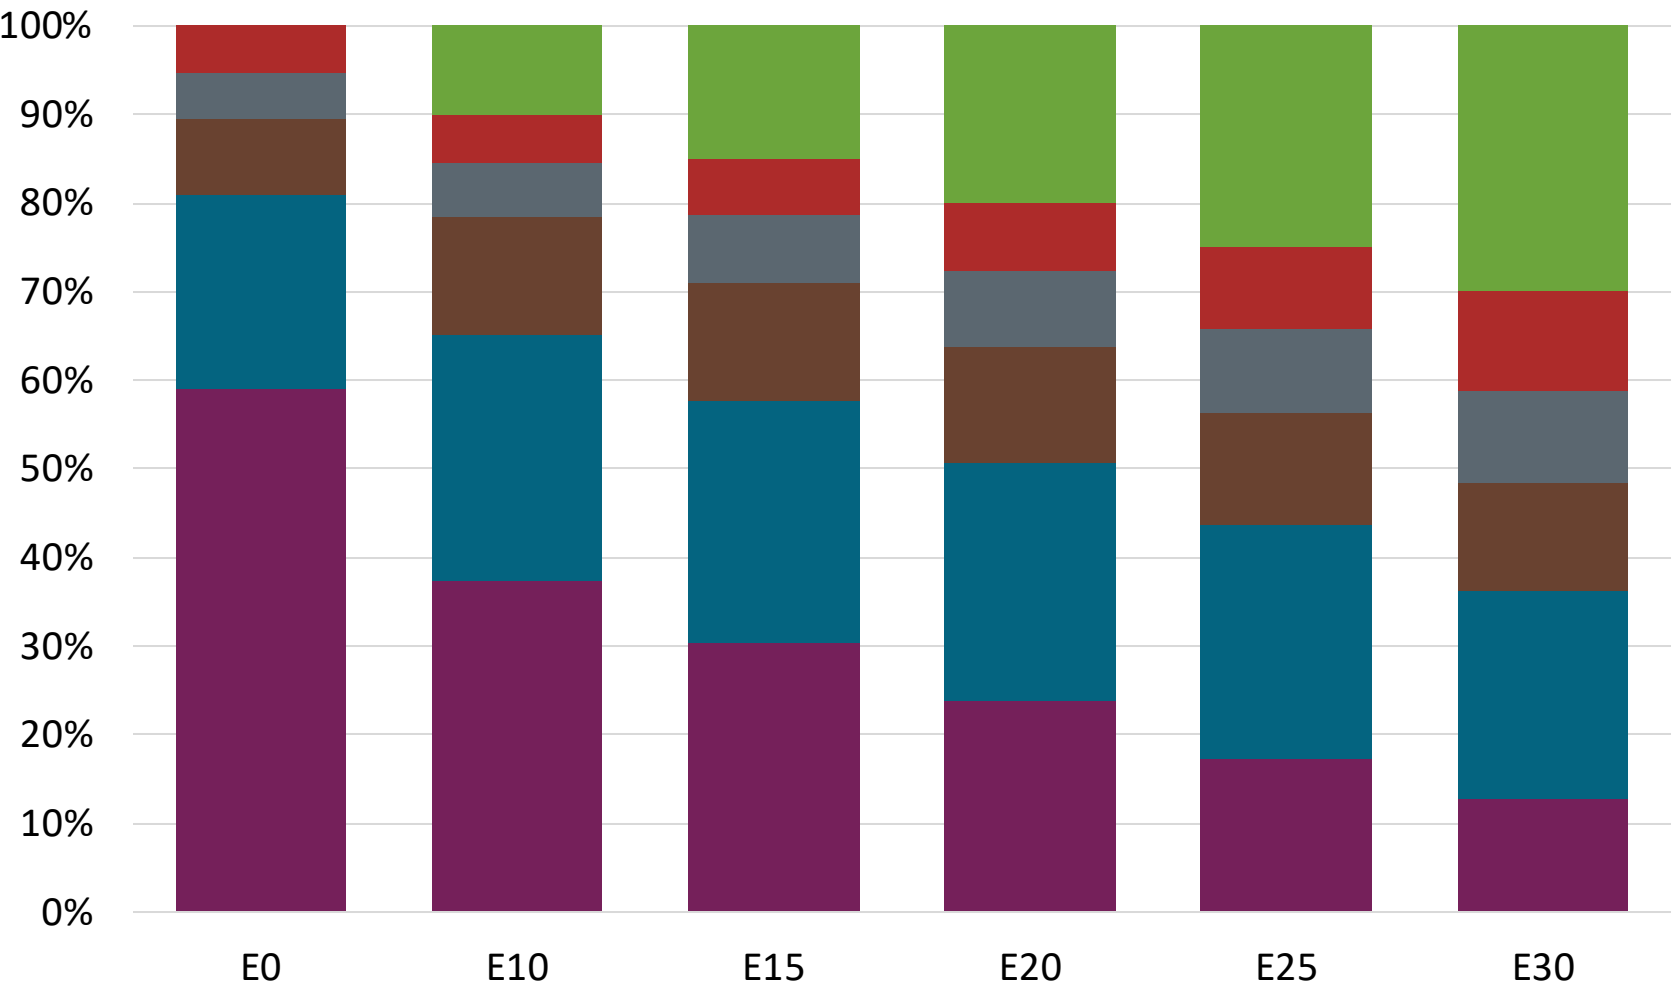

Octane (RON)	95.0	95.0	95.0	95.0	95.0	95.0
Price (US\$/gal)	\$ 2.672	\$ 2.483	\$ 2.395	\$ 2.309	\$ 2.223	\$ 2.138

Source: Faro90


Peru – Regular – Increased Octane

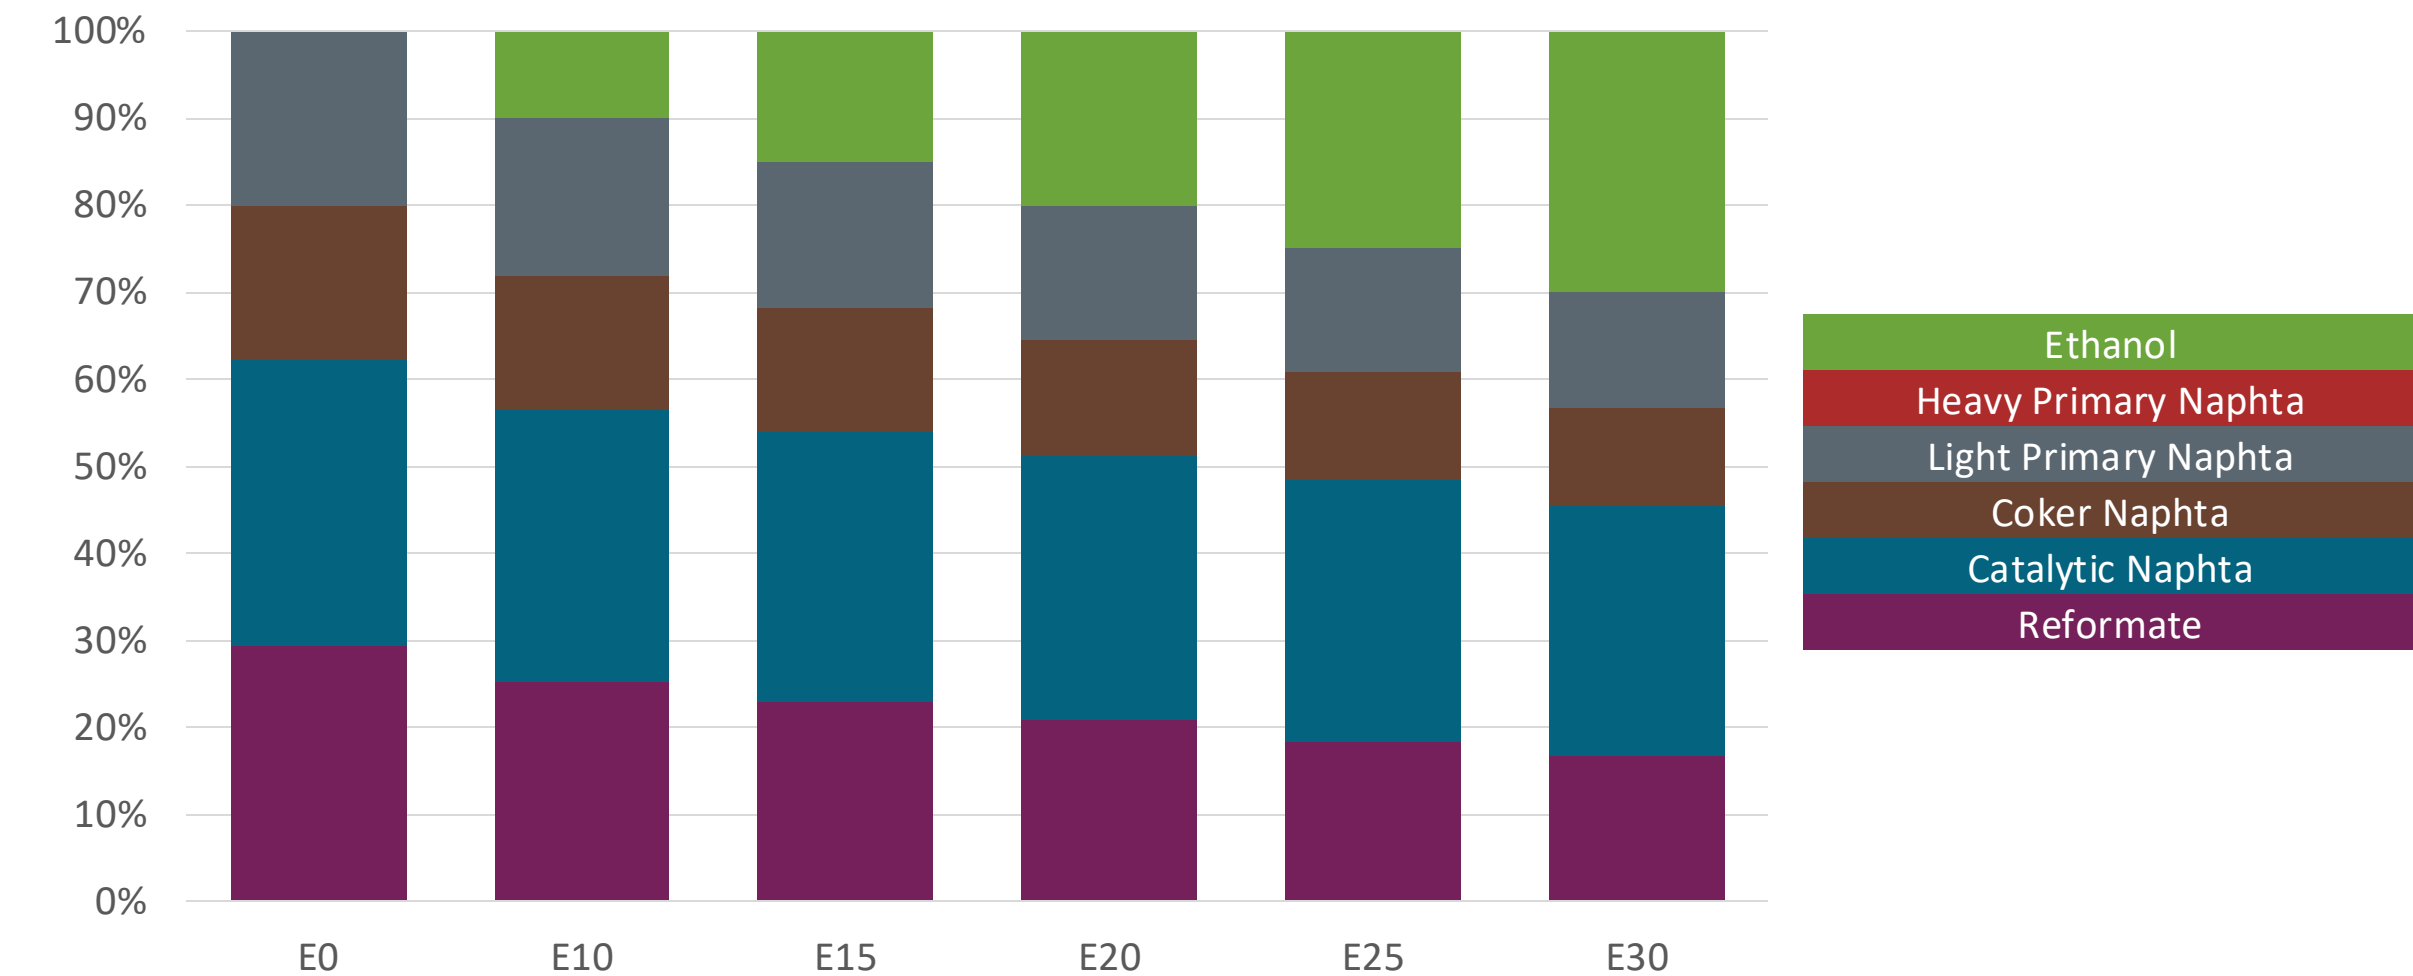

	E0	E10	E15	E20	E25	E30
Octane (RON)	90.0	93.5	95.2	96.9	98.4	105.4
Price (US\$/gal)	\$ 2.410	\$ 2.412	\$ 2.412	\$ 2.412	\$ 2.401	\$ 2.412

Source: Faro90

Peru – Premium – Increased Octane

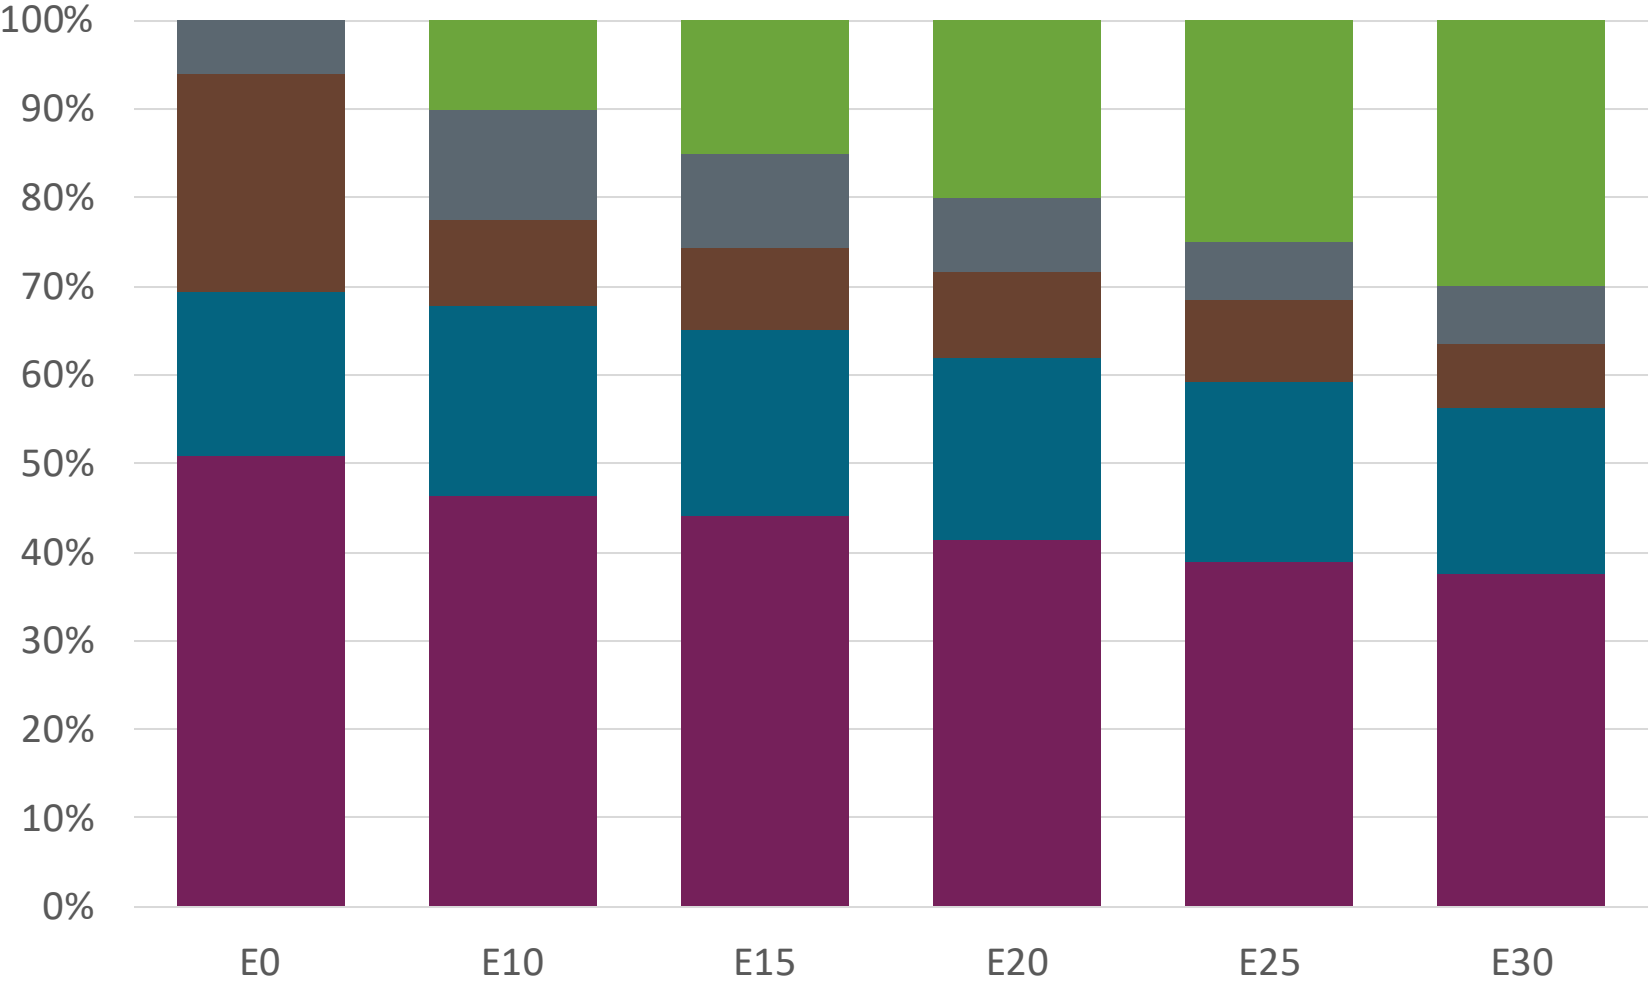

Octane (RON)	95.0	96.4	97.8	99.4	100.8	102.1
Price (US\$/gal)	\$ 2.623	\$ 2.561	\$ 2.545	\$ 2.531	\$ 2.515	\$ 2.496

Source: Faro90

Vehicle Emission Impact for Ethanol Gasoline Blending

The model used in this analysis takes as a reference the [International Vehicle Emissions Model \(IVE\)](#).


The model uses the Base Emission Rates from IVE model, as well as its Adjustment Factors based on:

- Vehicle technology (cars, trucks, buses, motorcycles),
- Vehicle fleet average age,
- Average traveled distance per vehicle by country, as well as
- Geographical and climatic conditions (altitude, humidity, temperature).

Emissions of criteria pollutants, toxic pollutants, and greenhouse gases (GHG) were calculated and calibrated with emission inventories, using real gasoline quality data. The reduction rates for gasoline/ethanol blends were obtained from various sources (IPCC, US Grains, among others).


Emission estimations for different pollutants for gasoline and gasoline/ethanol blends (10%, 15%, 20%, 25% and 30% ethanol) were determined using the IVE Model. A comparison between the results and the European (Euro 6) requirements is made. Results are also compared with real emissions of the United States vehicle fleet*.

Main Results

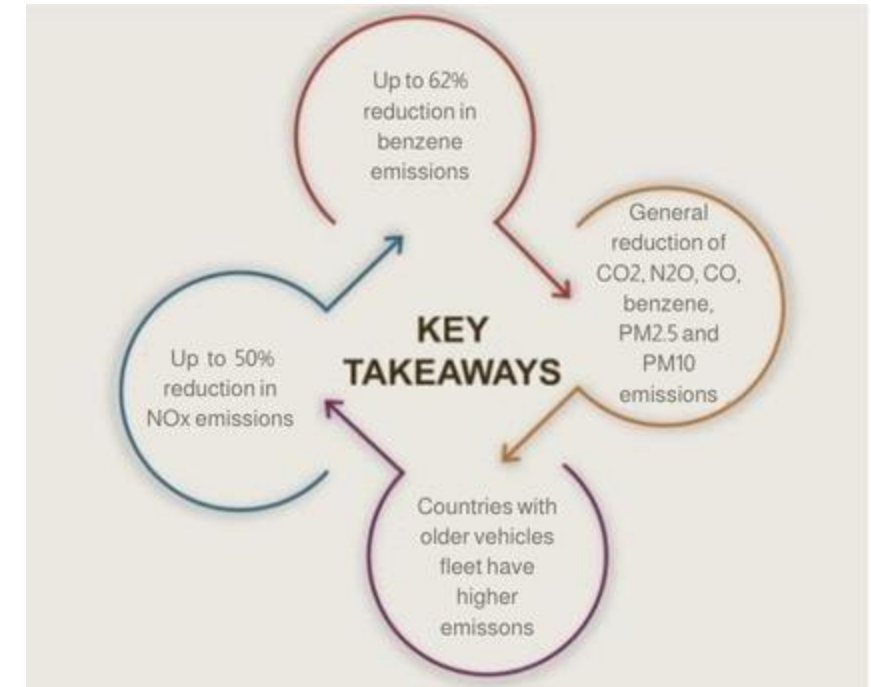




*Source: Bureau of transportation statistics.

Peru – Gasoline Vehicle Fleet

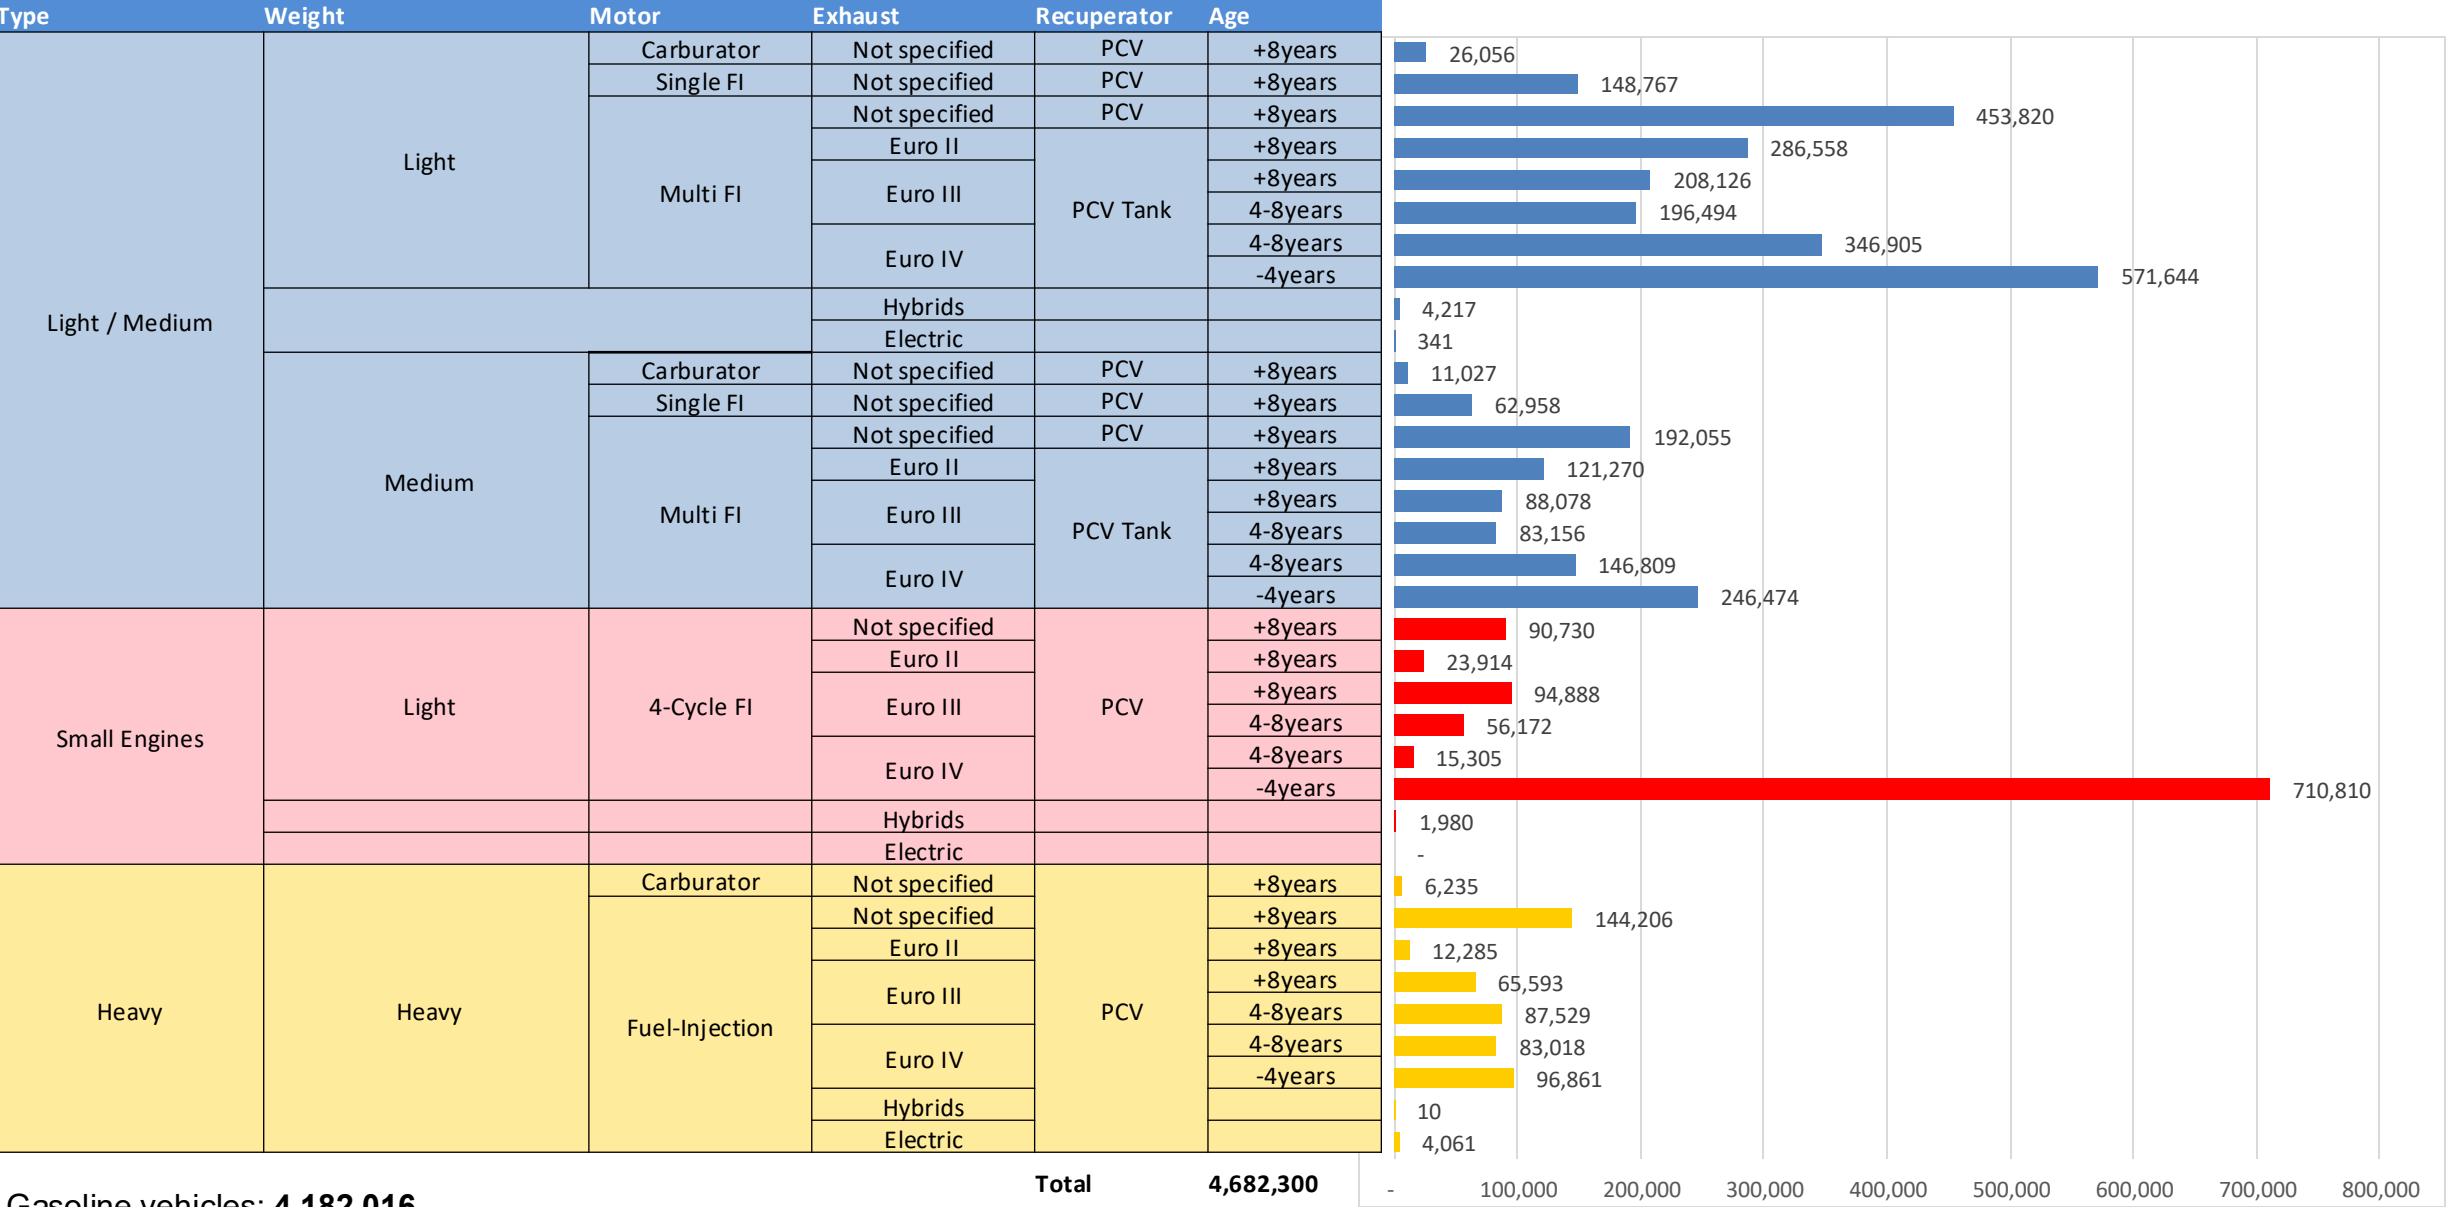

Gasoline vehicles: **4,182,016**
Average Age: **13.2 years**
Motorcycles: 21%

The FARO90 logo is shown in a blue box, followed by a chemical structure of a substituted benzene ring. The structure features a benzene ring with a methyl group at the top, a methyl group at the bottom, and a methyl group at the right. The ring is substituted with a methyl group at the top-left position, a methyl group at the bottom-left position, and a methyl group at the bottom-right position. The ring is also substituted with a methyl group at the top-right position, a methyl group at the bottom-right position, and a methyl group at the bottom-left position. The ring is also substituted with a methyl group at the top-left position, a methyl group at the bottom-left position, and a methyl group at the bottom-right position. The ring is also substituted with a methyl group at the top-right position, a methyl group at the bottom-right position, and a methyl group at the bottom-left position.

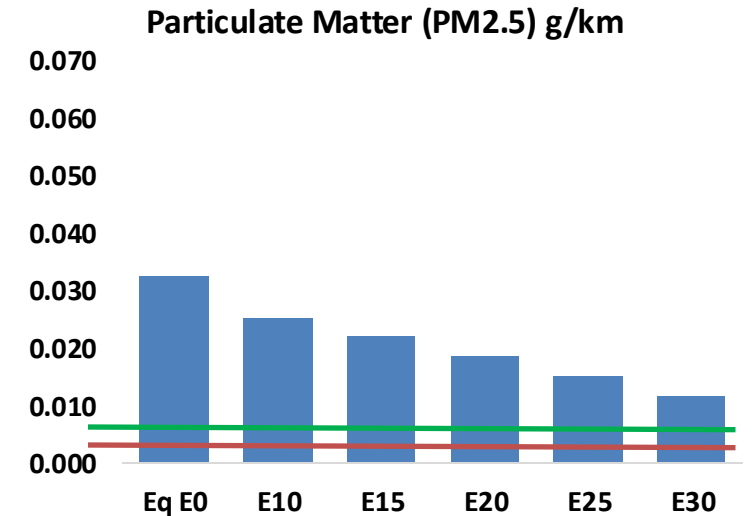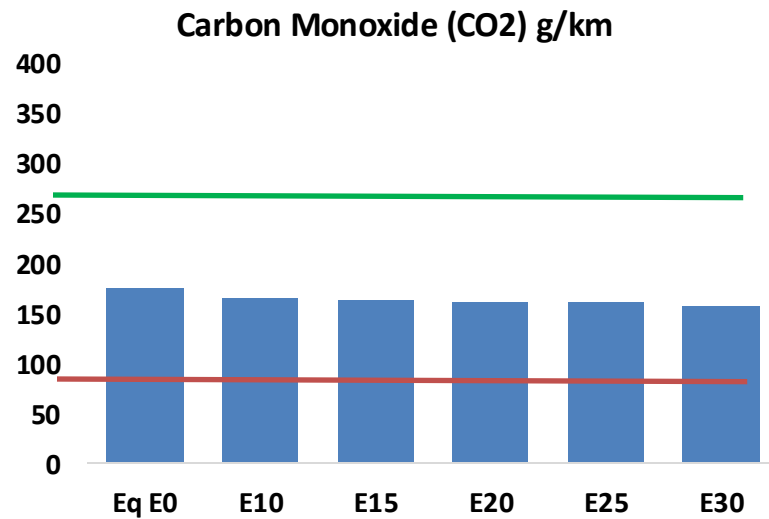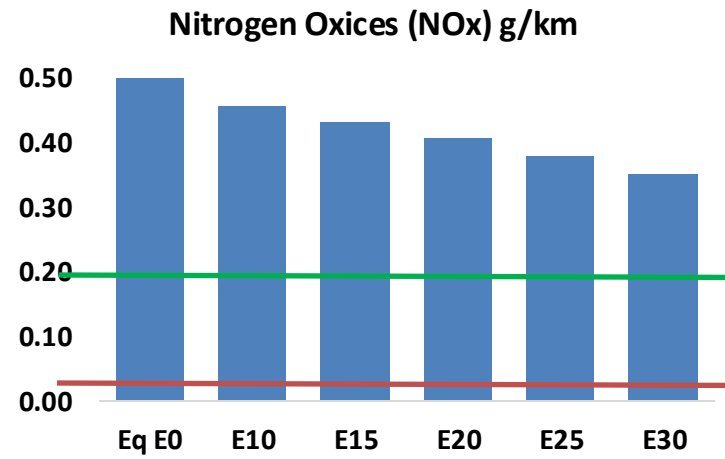

Peru – Gasoline Vehicle Fleet Emissions

Vehicular Fleet Emissions (kg/day)	Eq E0	E5	E10	E15	E20	E25	E30	Reduction (%)	
								E10	E20
CO	1,170,590	1,104,141	1,037,691	987,831	939,771	903,453	857,418	-11%	-20%
CO2	18,524,884	18,048,530	17,598,640	17,244,815	17,069,728	17,005,418	16,691,959	-5%	-8%
VOC	189,380	183,101	176,821	173,290	170,481	168,545	165,170	-7%	-10%
NOx	69,172	51,879	48,420	45,636	43,039	40,175	37,145	-30%	-38%
SOx	223	206	189	175	161	147	131	-15%	-28%
NH3	6,880	6,812	6,744	6,776	6,852	6,905	6,950	-2%	0%
N2O	191	190	189	190	194	196	198	-1%	2%
CH4	41,845	41,845	41,845	42,472	43,393	44,188	44,941	0%	4%
Lead	-	-	-	-	-	-	-	0%	0%
Butadiene	604	580	555	539	525	515	499	-8%	-13%
Acetaldehyde	1,308	1,502	2,203	3,355	4,571	5,223	6,172	68%	249%
Formaldehyde	4,505	4,380	5,106	5,995	6,281	6,948	7,564	13%	39%
Benzene	3,455	3,320	3,146	3,096	3,070	2,936	2,842	-9%	-11%
PM2.5	1,236	1,097	959	833	707	574	435	-22%	-43%
PM10	2,215	1,967	1,719	1,492	1,267	1,028	779	-22%	-43%


Life Cycle GHG Emissions

The Global Agenda for Climate Action calls for countries, cities and regions, businesses, and members of civil society around the world to achieve a low-carbon and climate-resilient economies in support of the Paris Agreement. Road Transportation accounts for 15% of total GHG emissions (IPCC,2023).


Ethanol gasoline blends are an internationally adopted practice that offer significant short-term benefits. Biofuels are an important solution to achieve reduction targets in the transportation sector.

Country GHG emission reductions are calculated using **RED II/III** and **GREET** life cycle emission methodologies and the **International Vehicular Emissions Model (IVE)**. Results are compared to the current country targets for 2035. Current 2024 country emission are those published by **IPCC**.


Current GHG Global Emissions Distribution

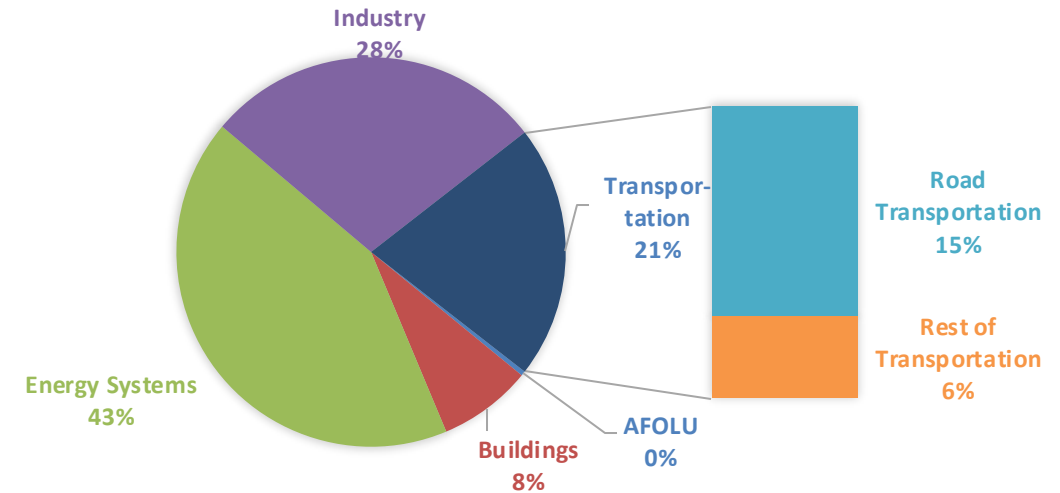

IPCC Transport Sector Sustainable Development Goals and climate policies Scenario, 2023

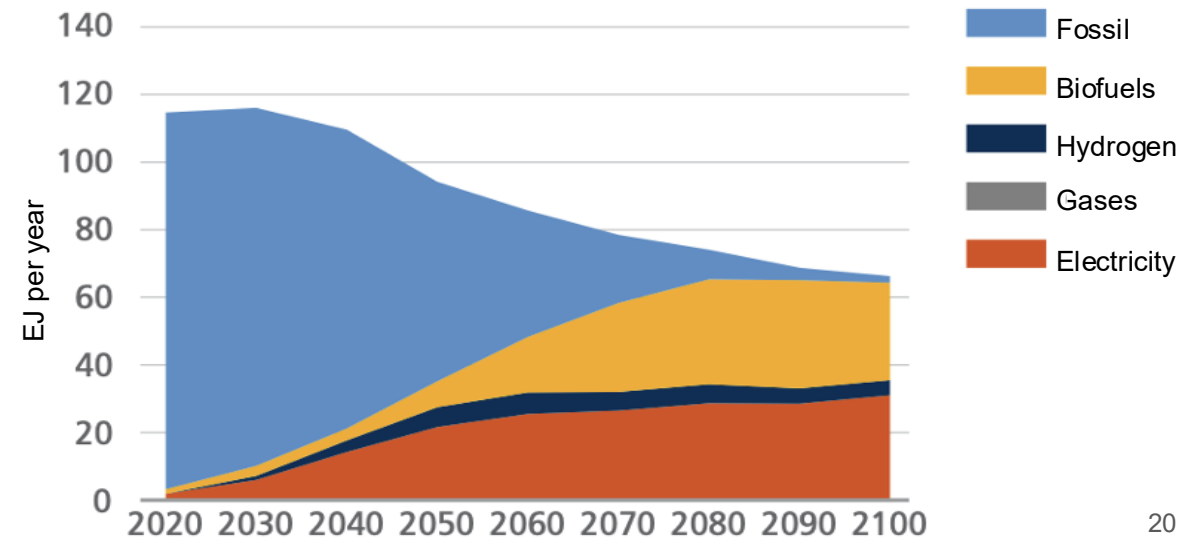

Peru – Gasoline Vehicle Fleet GEI Emissions

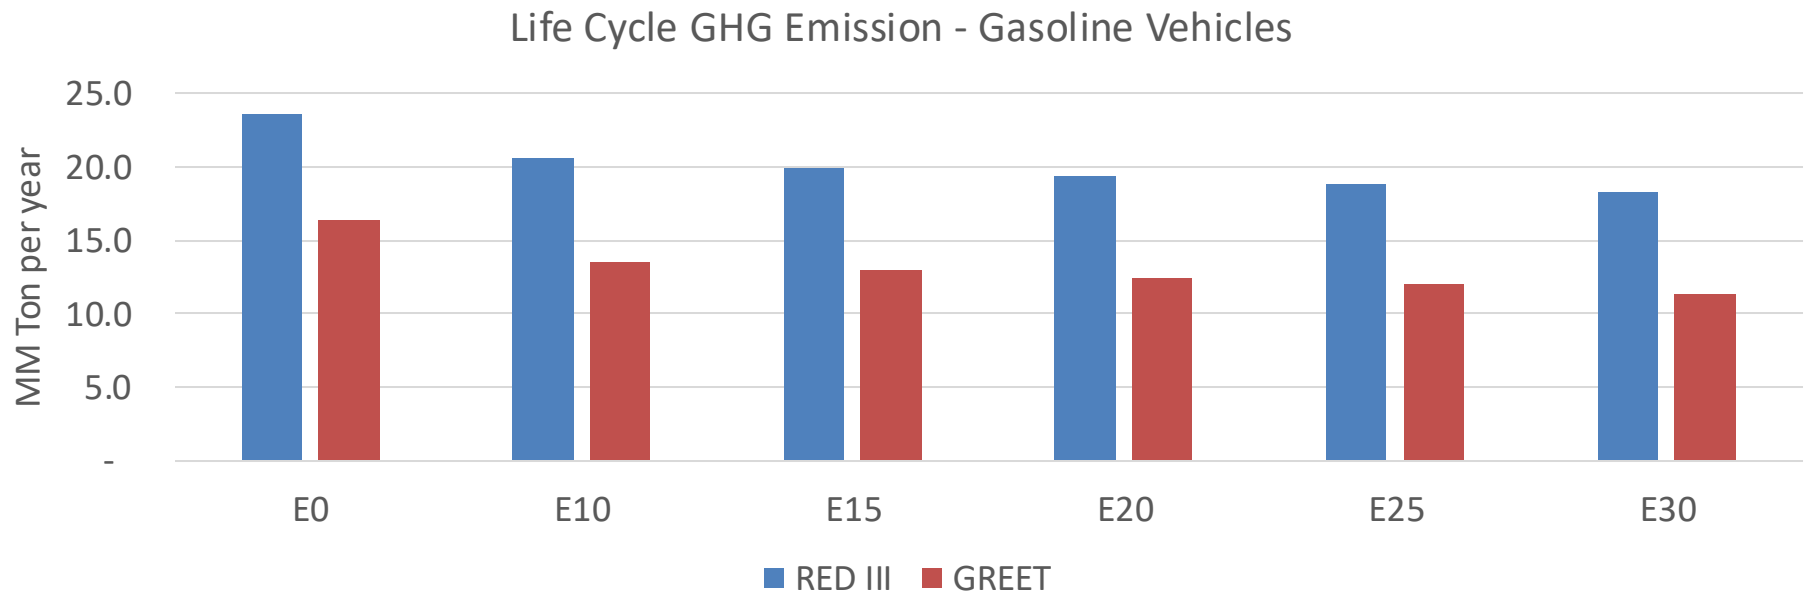

Country Emissions 2024 (MMT/year)	111.2
2035 Target (MMT/year)	96.1
Delta	15.1

%Reduction vs E0	E0	E10	E15	E20	E25	E30
GREET 2024	0.0%	17.5%	21.1%	24.1%	27.0%	30.7%
RED II/III	0.0%	12.8%	15.5%	17.8%	20.1%	22.8%

% 2035 Target	E0	E10	E15	E20	E25	E30
GREET 2024	0.0%	19.0%	22.8%	26.0%	29.2%	33.2%
RED II/III	0.0%	19.9%	24.1%	27.8%	31.3%	35.6%