

Ethanol Blending in Gasoline – Estonia


September 2025



**U.S. GRAINS &
BIOPRODUCTS
COUNCIL**

20 F St. NW, Suite 900 \ Washington, DC 20001
202-789-0789 \ www.grains.org

FARO90



www.faro90.com
+52 55 6122 2255

Ethanol Blending in Europe


There are important fuel quality and environmental impact of vehicle emission challenges in the Region.

- The use of ethanol improves gasoline quality and creates flexibility in gasoline production.
- Ethanol use is a cost-effective way to increase gasoline octane and to replace more expensive gasoline components.
- Ethanol contributes to transport decarbonization and air quality improvement.
- There are opportunities across Europe to increase the ethanol blend level and implement new policies on the use of gasoline-ethanol blends.



Twenty eight countries with potential and additional use of ethanol were studied: 1) Gasoline market profiles; 2) Optimization of gasoline blends with ethanol and, 3) Environmental impact of gasolines blended with ethanol.

Ethanol Gasoline Blending in Estonia

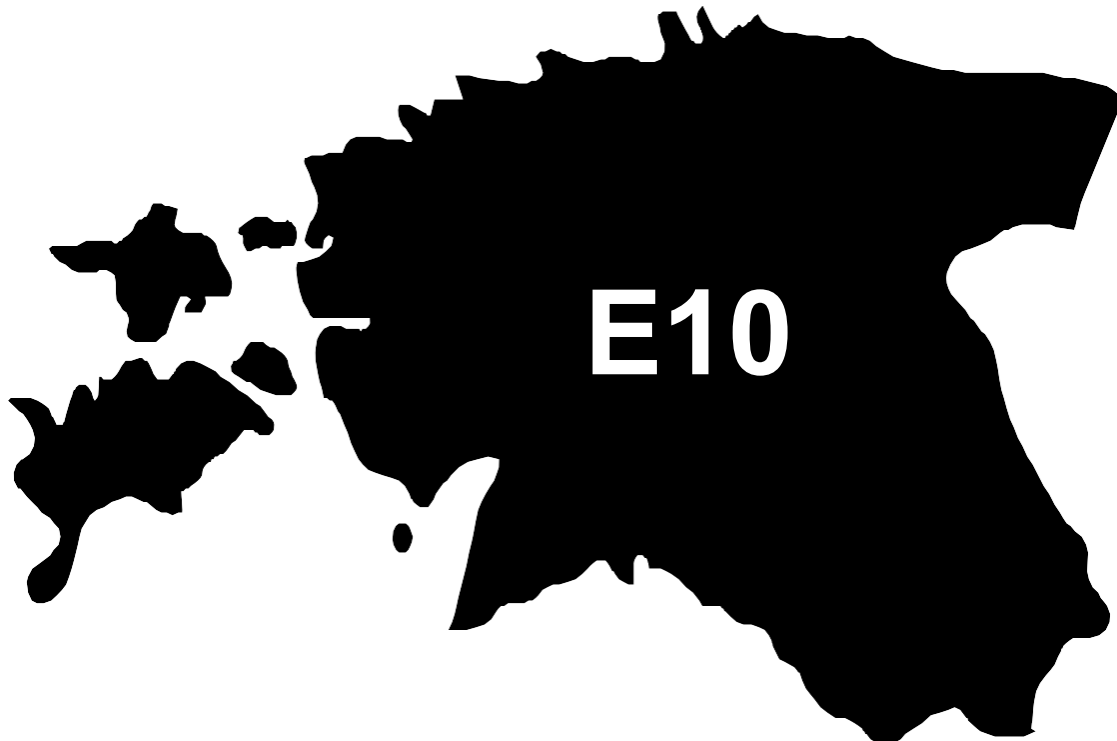


In 2024, gasoline consumption in Estonia was 267 million liters (71 million gallons) and growth rate was -1.8%. There is no gasoline production. Gasoline net imports were 267 million liters (70 million gallons). Estonia complies with the European gasoline standards and offers two main grades: RON 95 and RON 98) with an average octane of 96.2 RON.


In 2024, ethanol consumption in Estonia was 5 million liters (1 million gallons) representing 1.8% of gasoline demand. Ethanol imports were 5 million liters (1 million gallons). Ethanol sources is Cereals 100%.

Source: Eurostat, European Commission


Gasoline Demand in Estonia

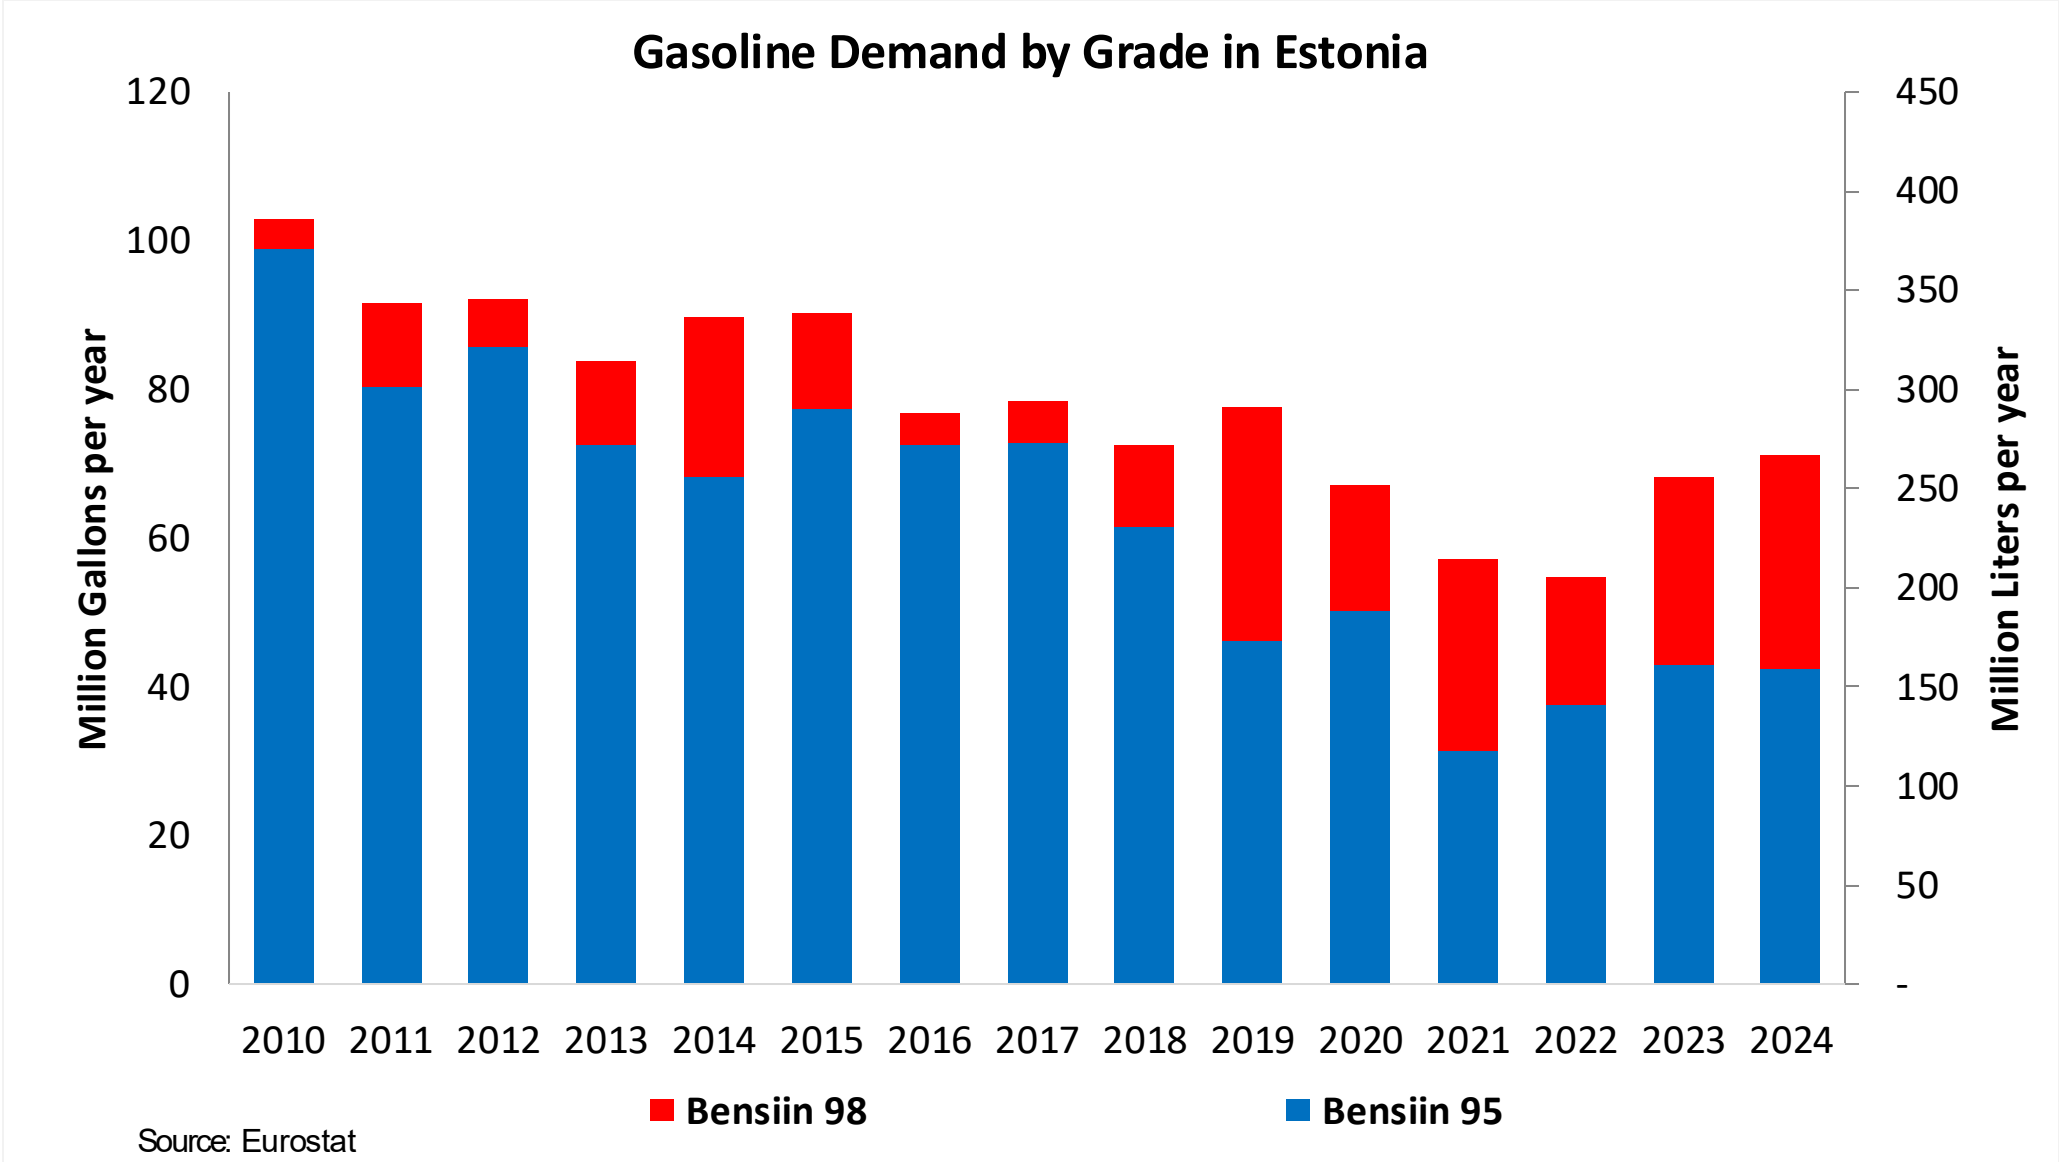


Gasoline Imports in Estonia

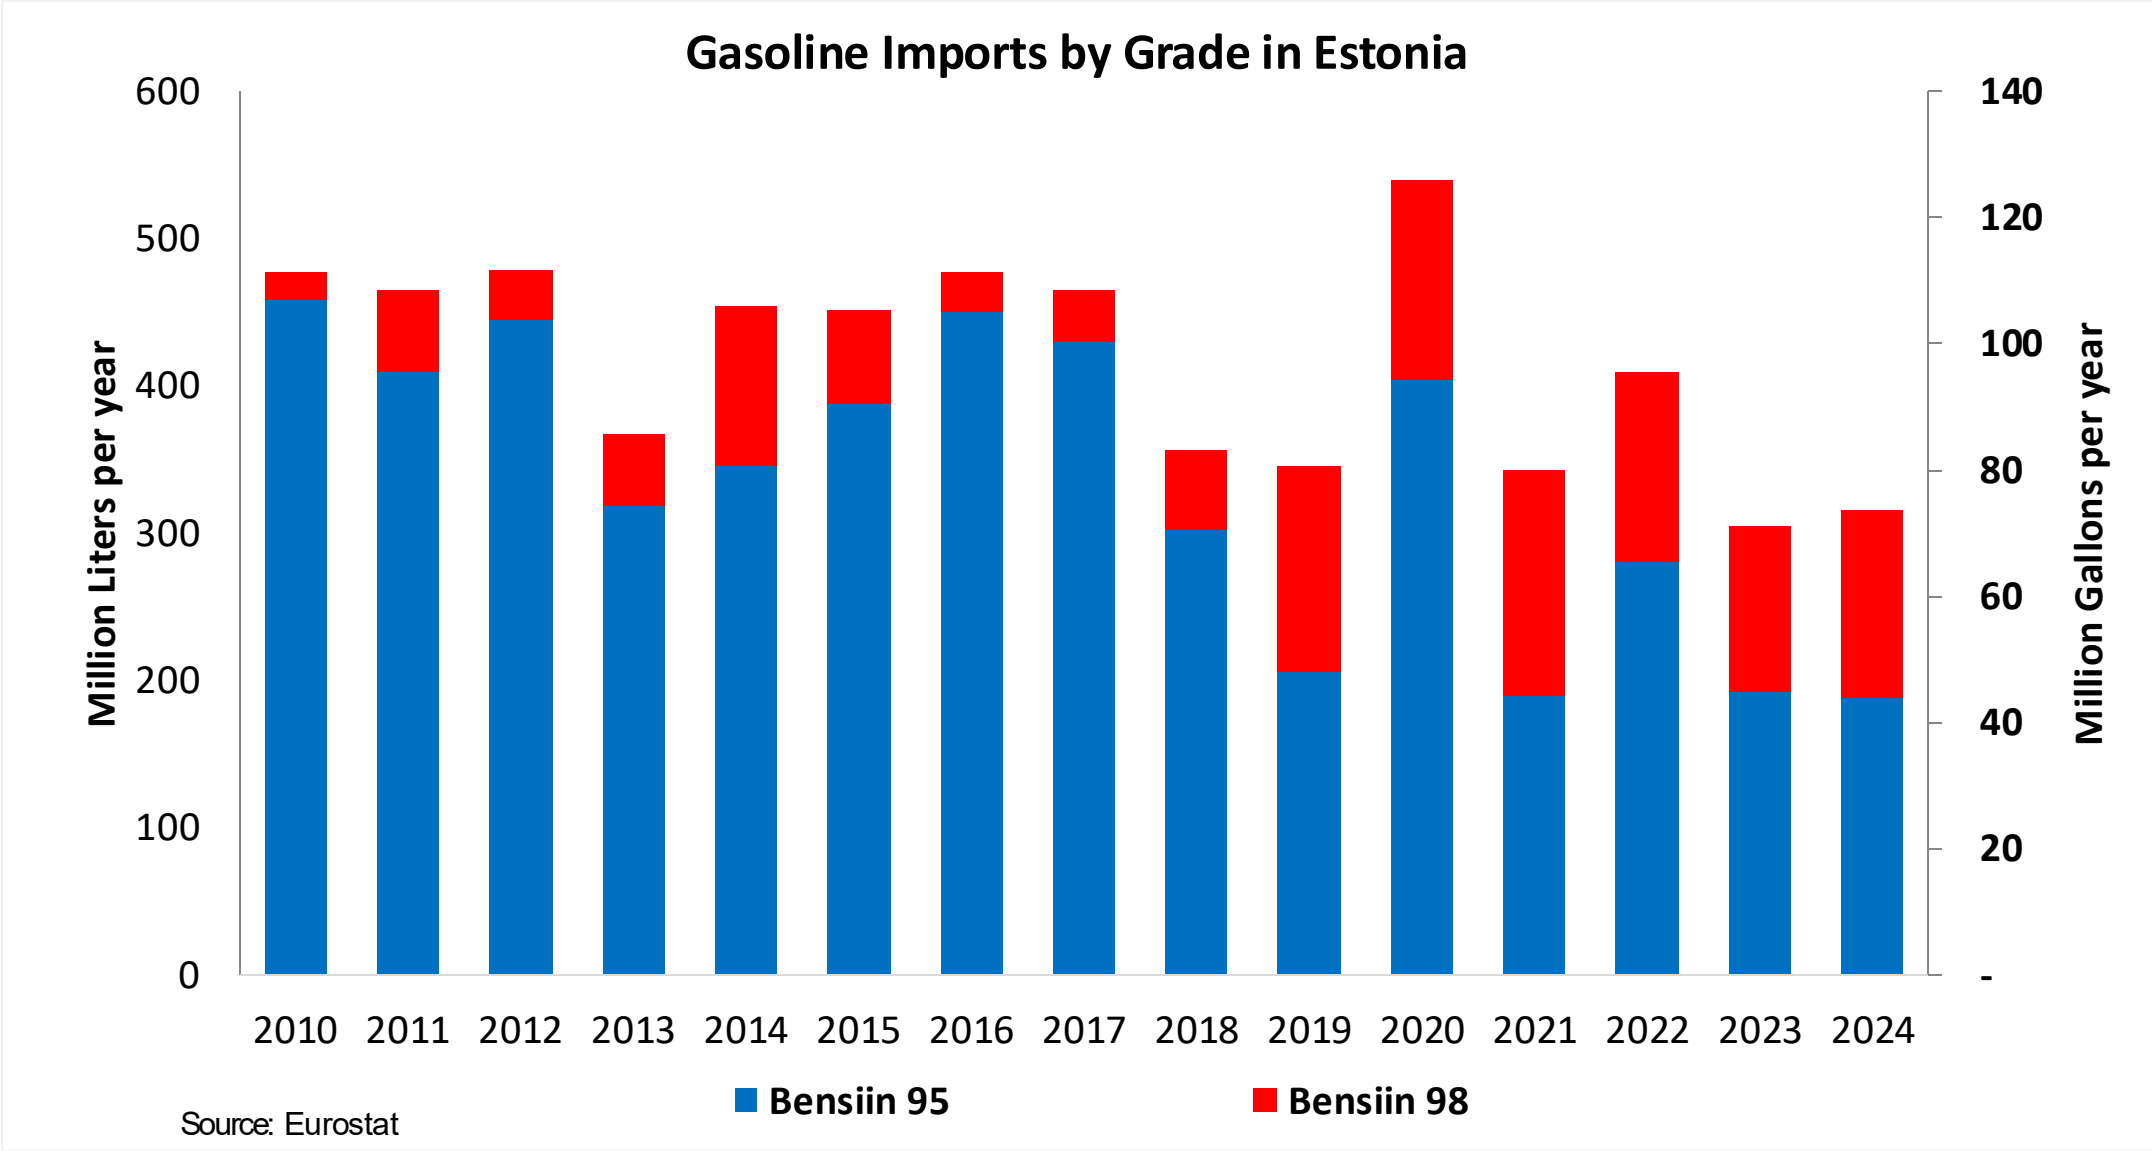

Gasoline Exports in Estonia

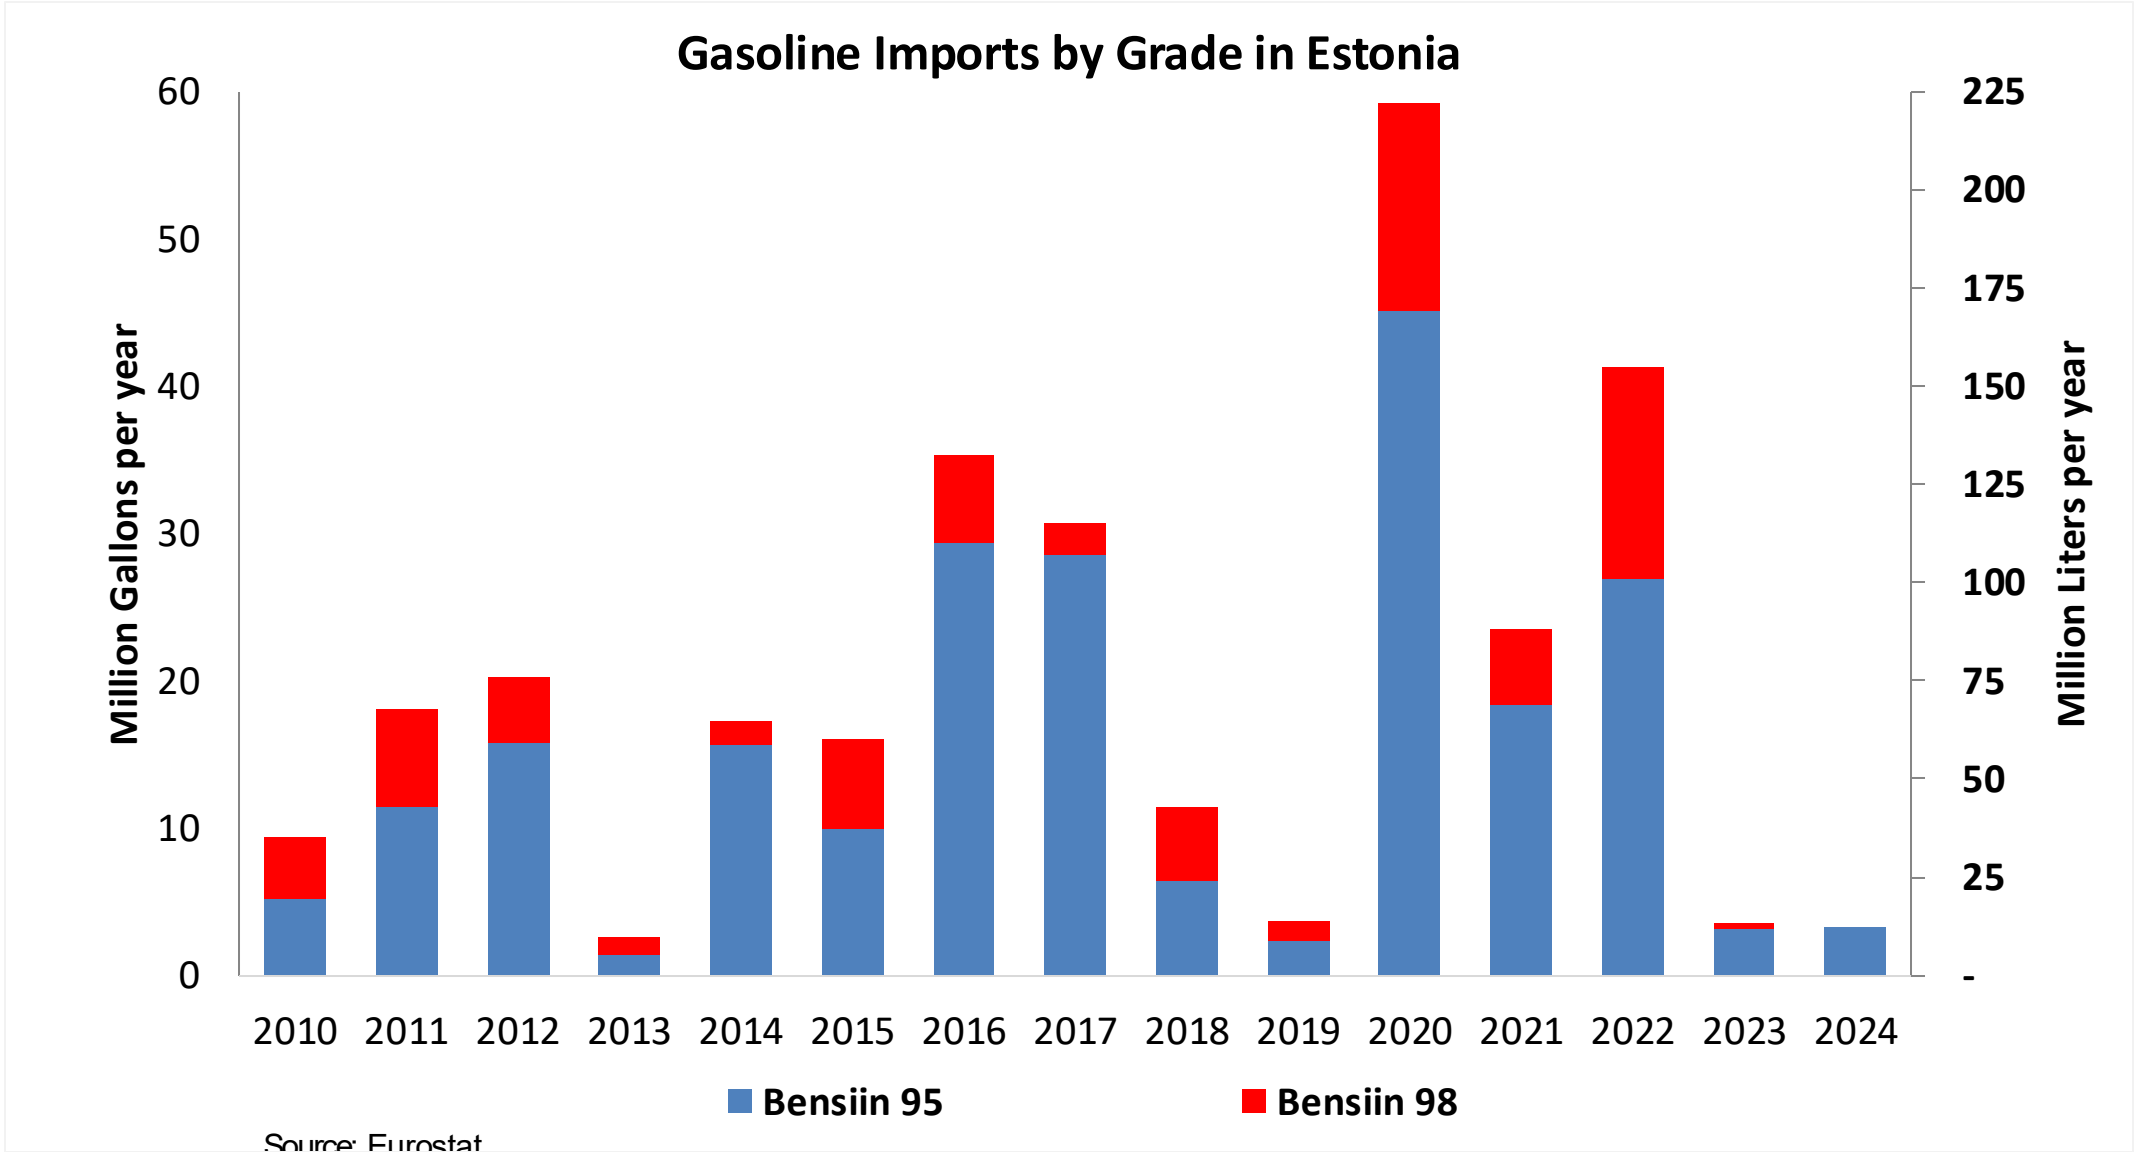

Ethanol Balance in Estonia

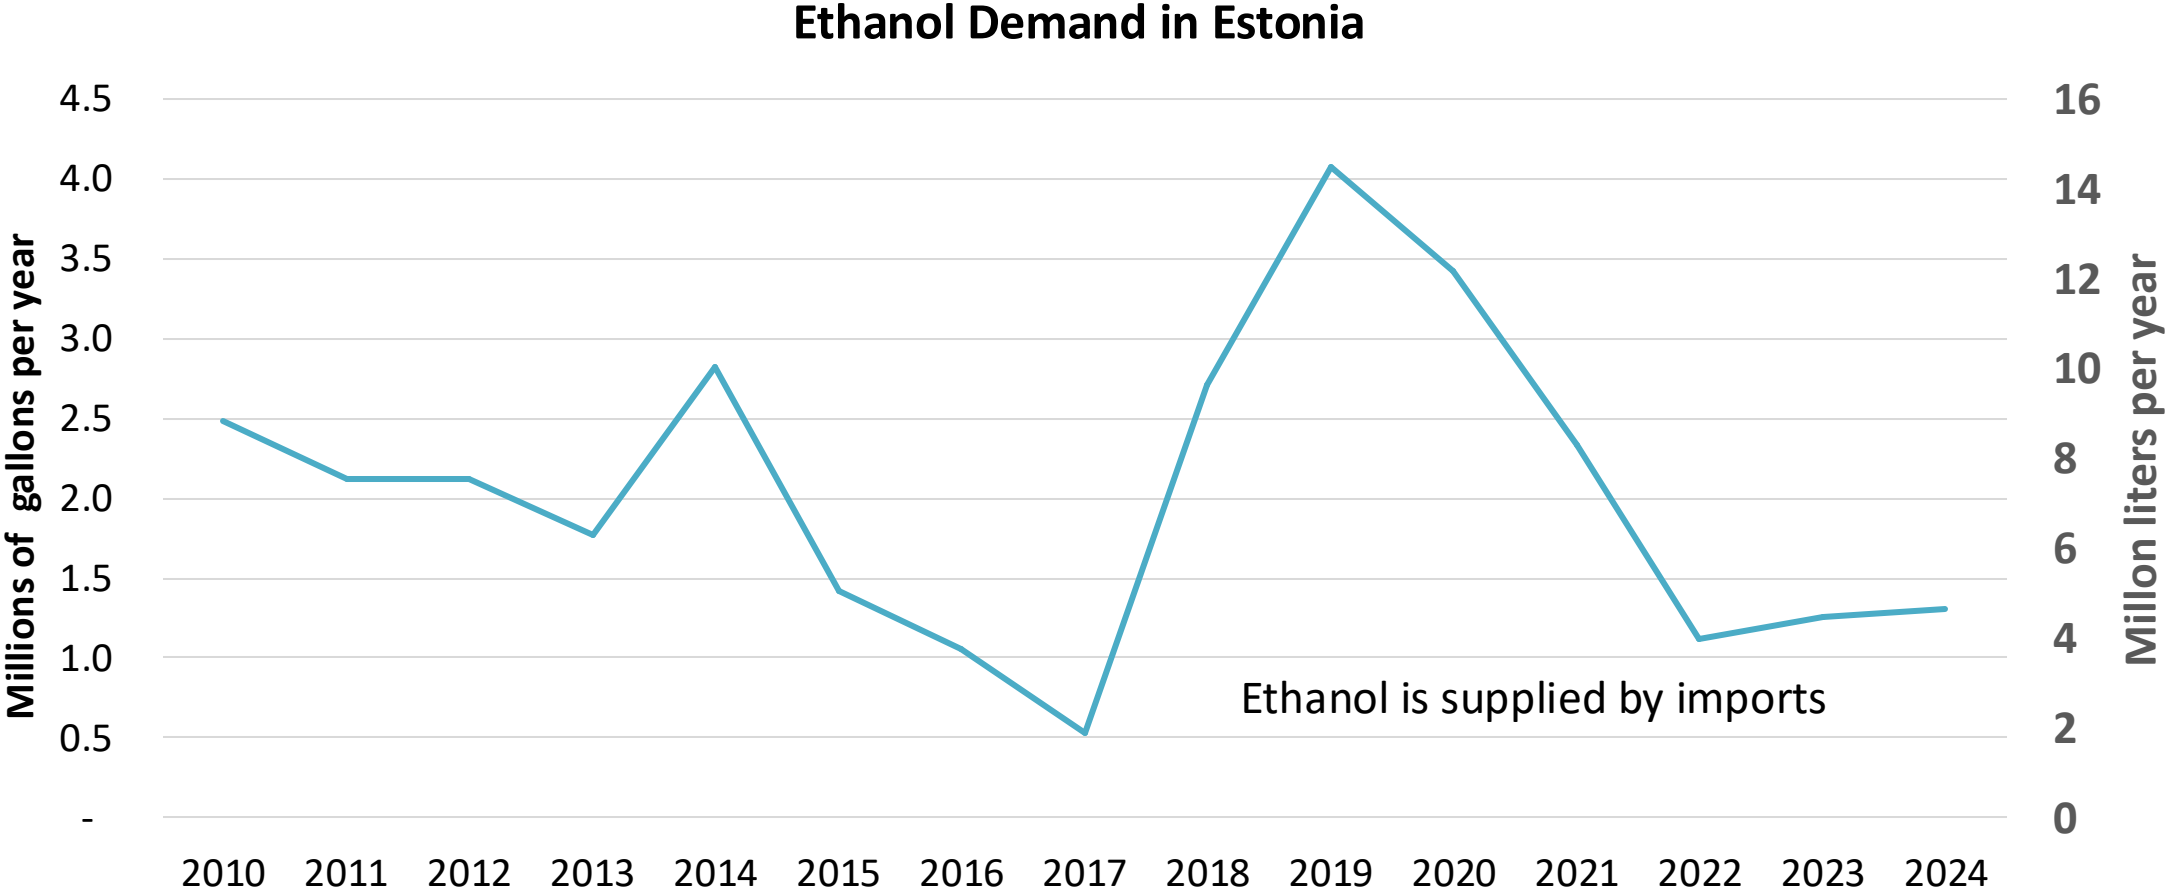

Source: Eurostat, Statistics Estonia


Gasoline Quality in Estonia

Name	EN 228:2025 (Euro 6); Country Level Fuel Ordinances							
Implementation Date	2025							
Applicability	All EU Contries + UK							
Grade	RON 95 E5		RON 95 E10		RON 98 E5		RON 98 E10	
	Min	Max	Min	Max	Min	Max	Min	Max
RON	95.0		95.0		98.0		98.0	
MON	> 85	> 88	> 85	> 88	> 85	> 88	> 85	> 88
AKI								
Benzene (%vol)	< 1							
Aromatics (% vol)	< 35							
Olefins (%vol)	< 18							
Lead (g/L)	< 0.005							
Manganese (mg/L)	< 2,0							
Sulfur (ppm)	10.0							
Oxygen (%w)*	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7
Ethanol (%vol)	< 5	< 10	< 5	< 10	< 5	< 10	< 5	< 10
PVR 37.8°C (psi)	<> 45 - 100 kPa in 6 Volatility Classes							
Overall Biofuels (%cal)	7.5							
Advanced Biofuels (%cal)	0.5							
Bioethanol in Gasoline Sales (%cal)	-							
GHG Emission Reduction (%)	-							

* Methanol 3%, Iso-propyl alcohol 12%, Ter-butyl alcohol 15%, Iso-butyl alcohol 15%, Ethers +5 Carbons 22%, Other Oxygenates 15%

Source: European Commision


Gasoline Component Blending in Europe



Gasoline is a blend of a base gasoline and other components. Each component provides different properties to the final blend, for example, isomerates, alkylates and butanes increase the octane. The components commonly used in Europe are:

- Catalytic Gasoline
- Light Primary Naphta
- Heavy Primary Naphta
- Reformate
- Isopentane
- Alkylate
- Isomerate
- Hydrocracked Gasoline
- Coker Naphta
- n-Butane
- MTBE
- ETBE
- TAME
- Aromatics

Source: Faro90

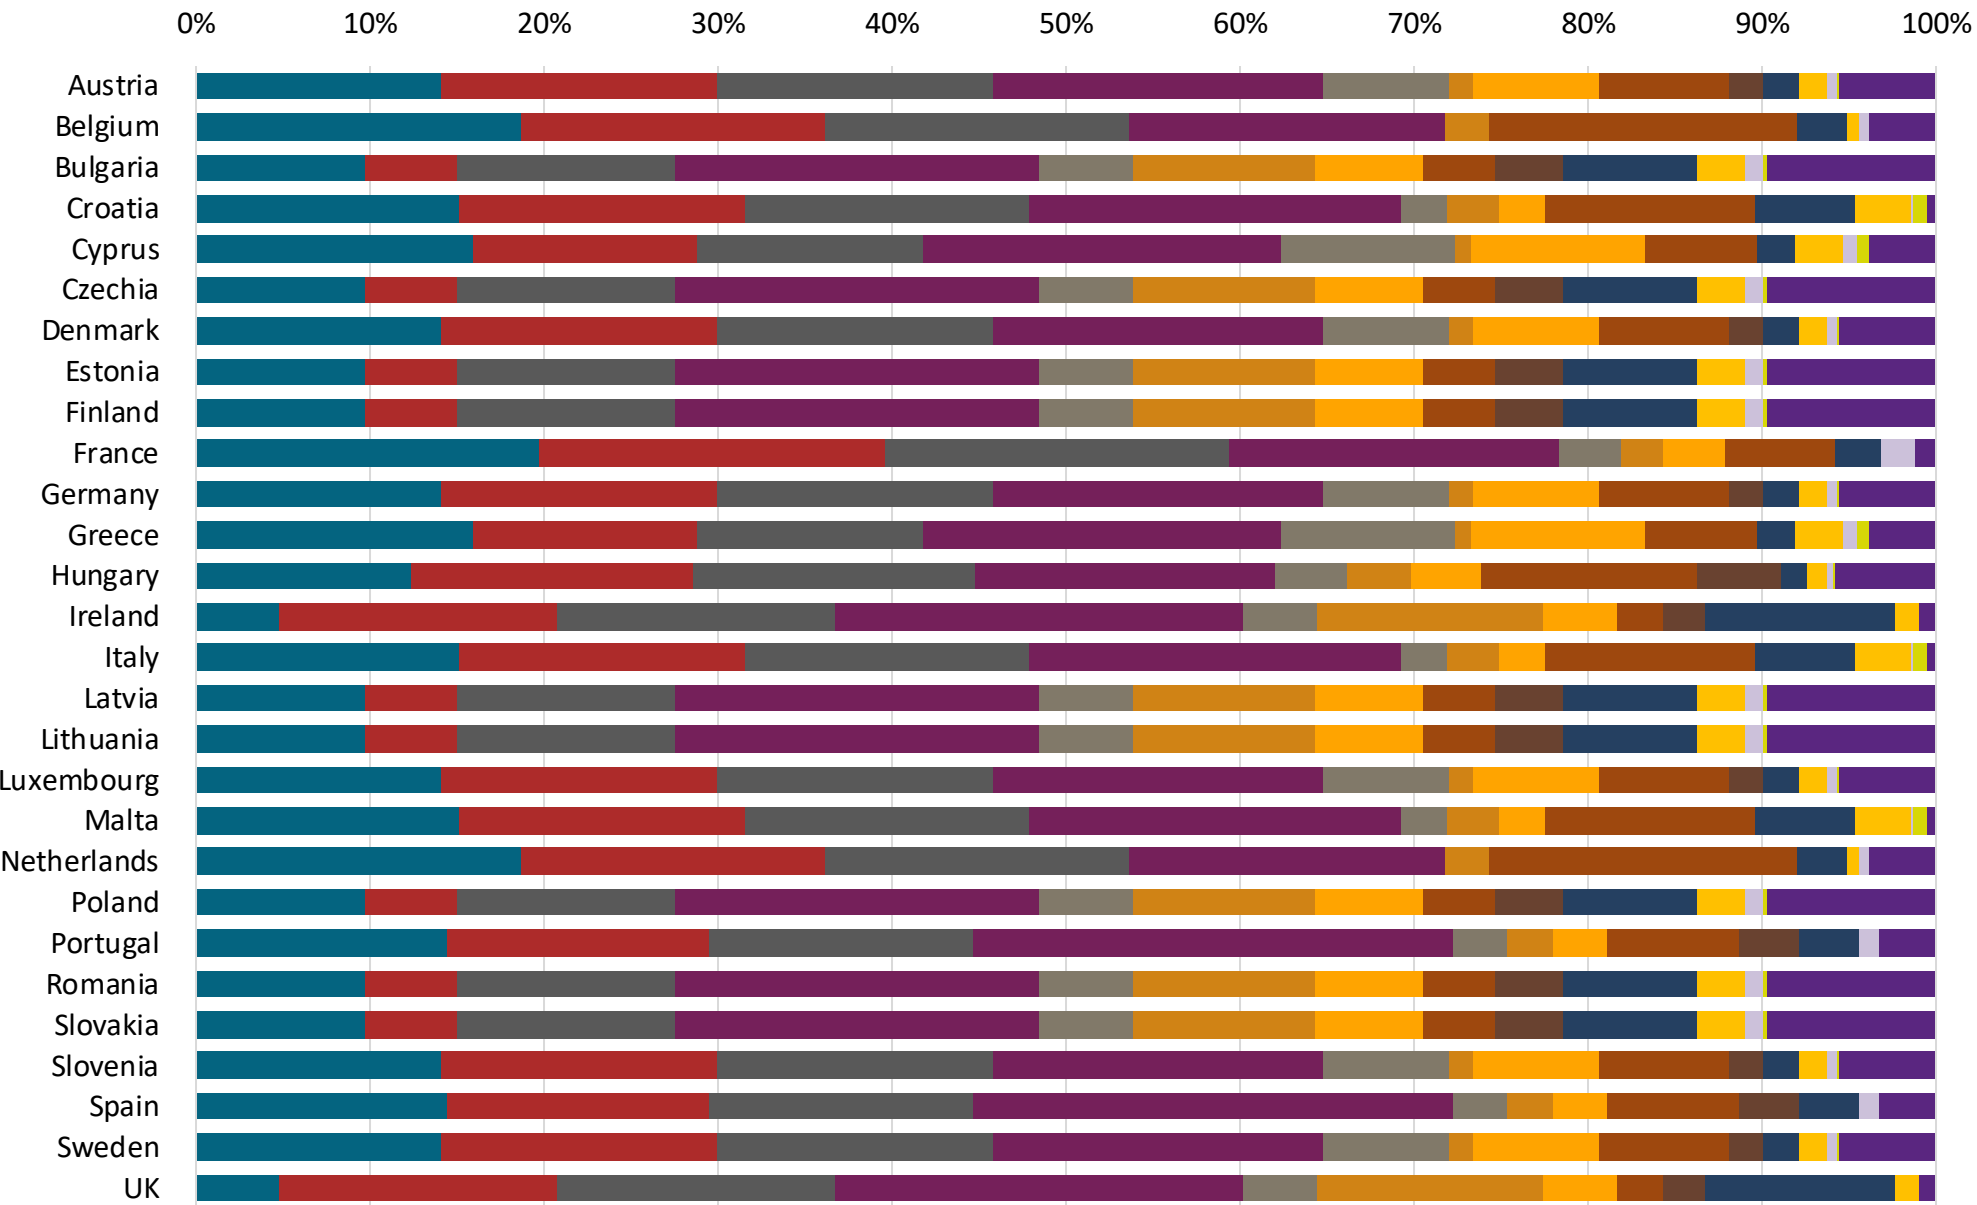


Gasoline Blending Optimization

In some parts of the world, ethanol is added to gasoline as a blending component. The advantages of ethanol include that it is a renewable fuel made of biomass; that it is an octane booster that helps to dilute sulfur; and that it allows the fulfillment of environmental objectives. To determine the optimal components to be blended with ethanol, a **blending model** was used. This model selects the components to add in the gasoline/ethanol blend based on:


- Components prices,
- Properties each component affects,
- Quality parameters by country, and
- Component availability by country.

Through iterations, the model obtains the %v/v of the components to be blended with 10%, 15%, 20%, 25% and 30% of ethanol, in such a way that the final blend complies with the required properties of a finished gasoline by country.


The blending model uses gasoline component spot average prices 2024 and provides fuel prices that do not include country distribution costs, local taxes and subsidies and import or gas station margins.

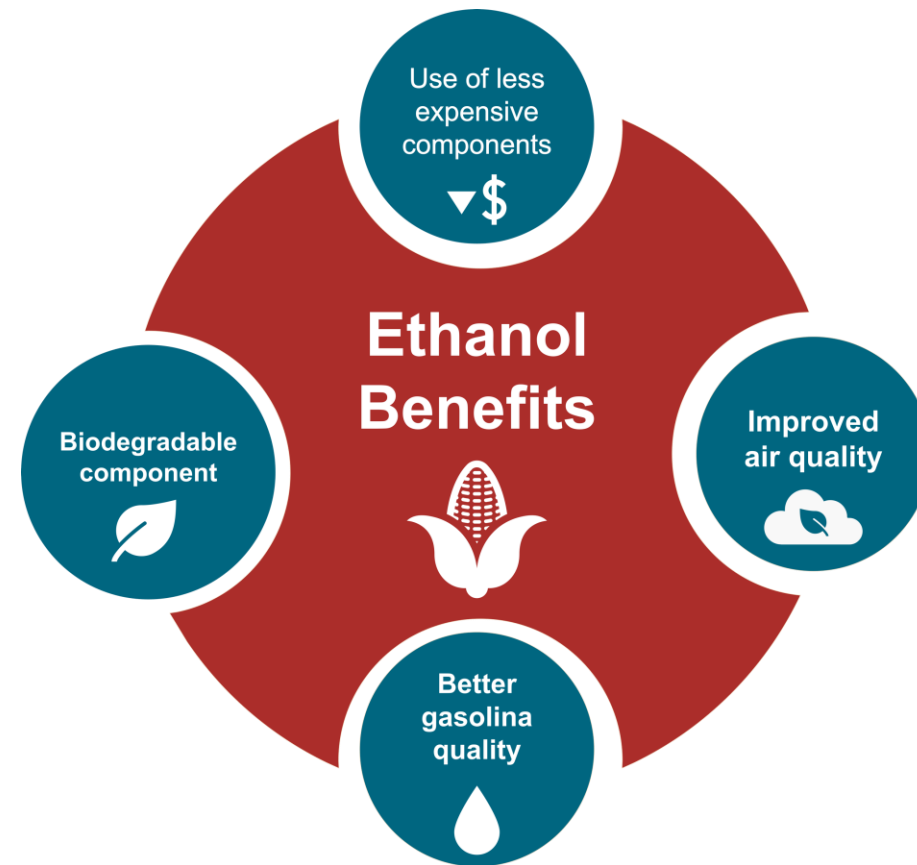

Estonia Available Blending Components

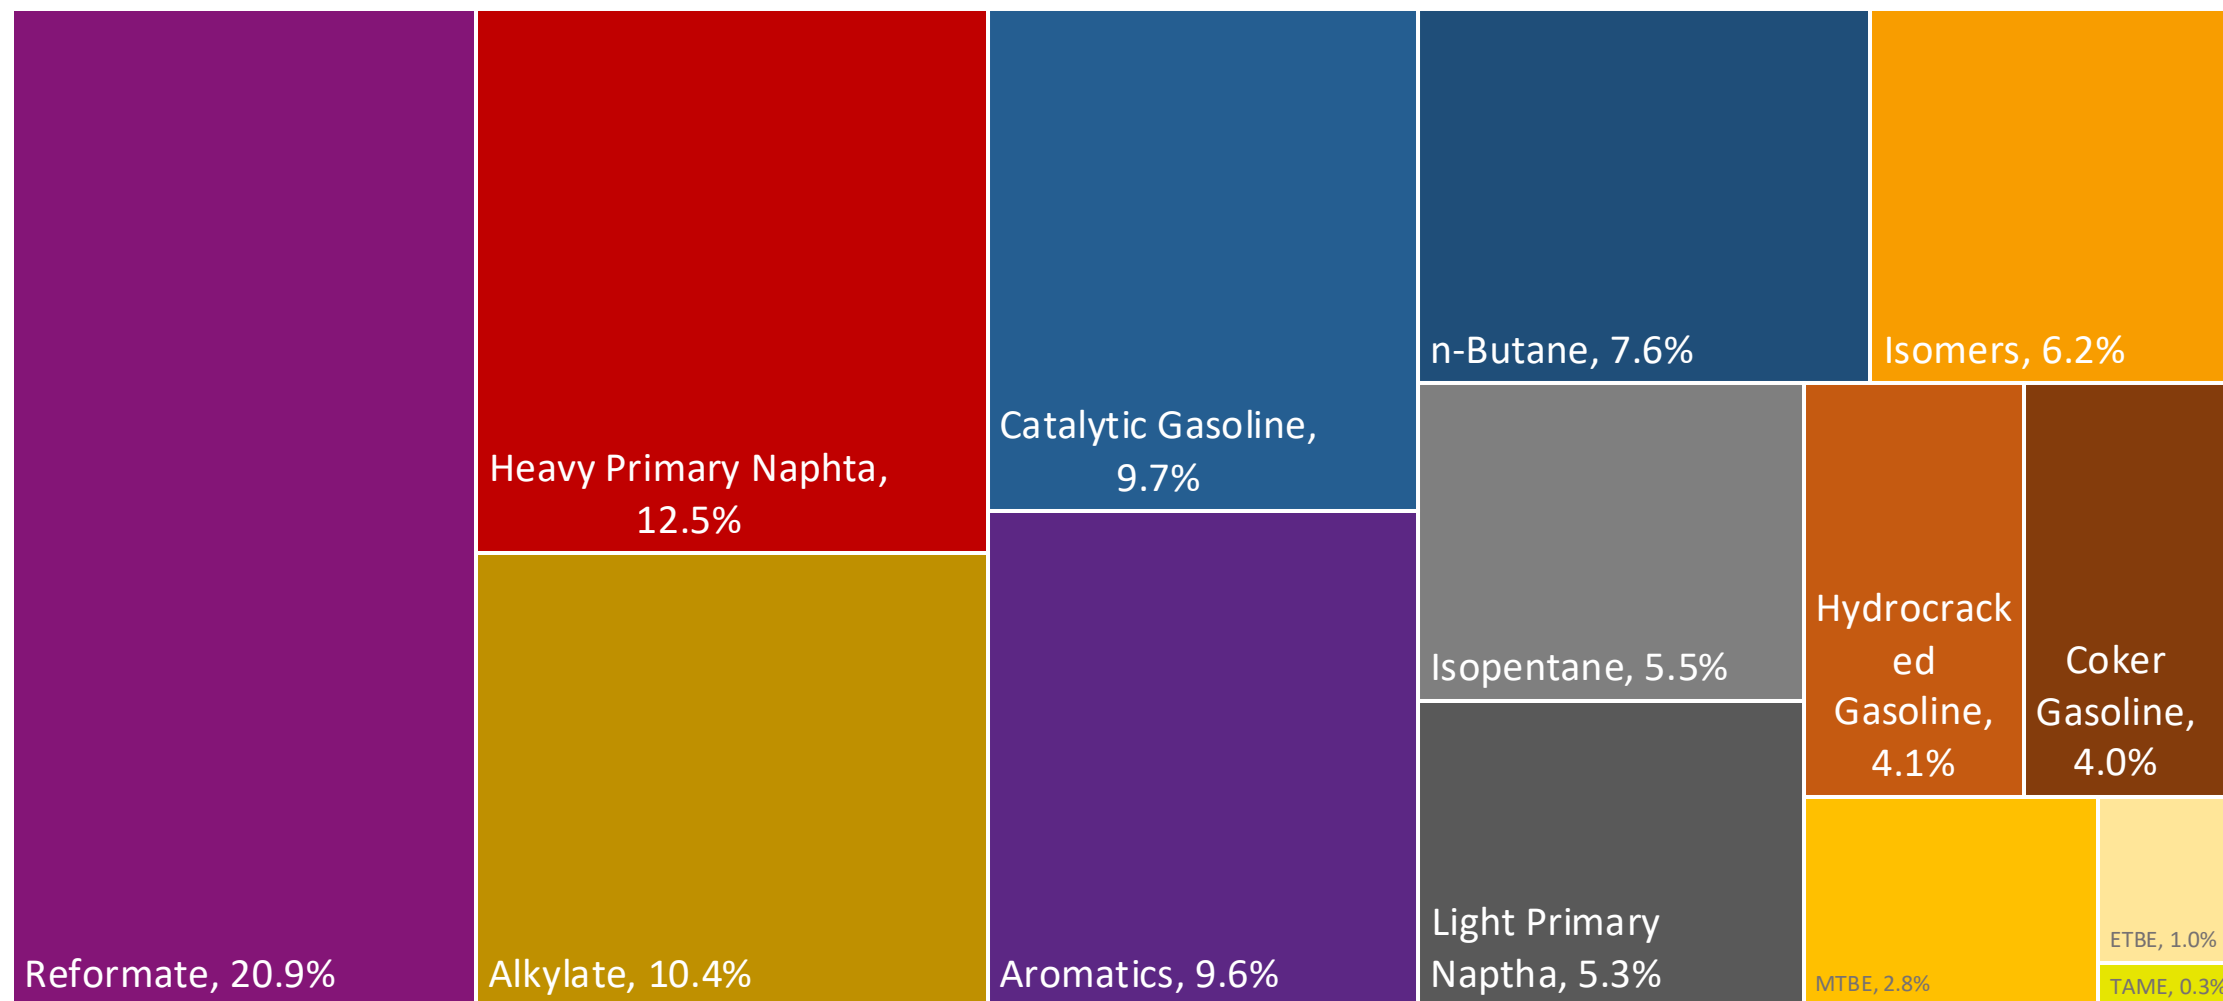



Estonia – Gasoline 95 – Constant Octane

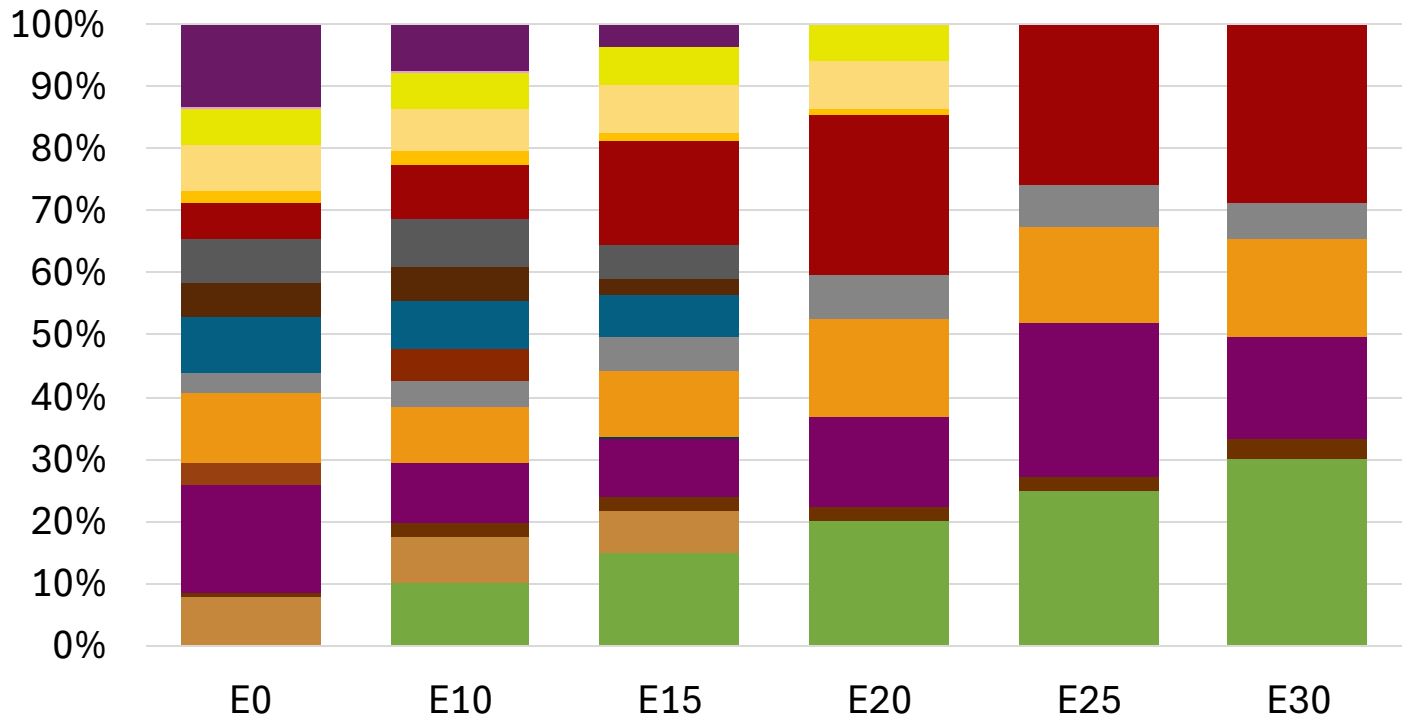

Average CIF 2024
Prices

Octane (RON)	95.0	95.0	95.0	95.0	95.0	95.8
Price (US\$/gal)	\$ 2.274	\$ 2.136	\$ 2.036	\$ 1.921	\$ 1.875	\$ 1.822

Estonia - Gasoline 98 - Constant Octane

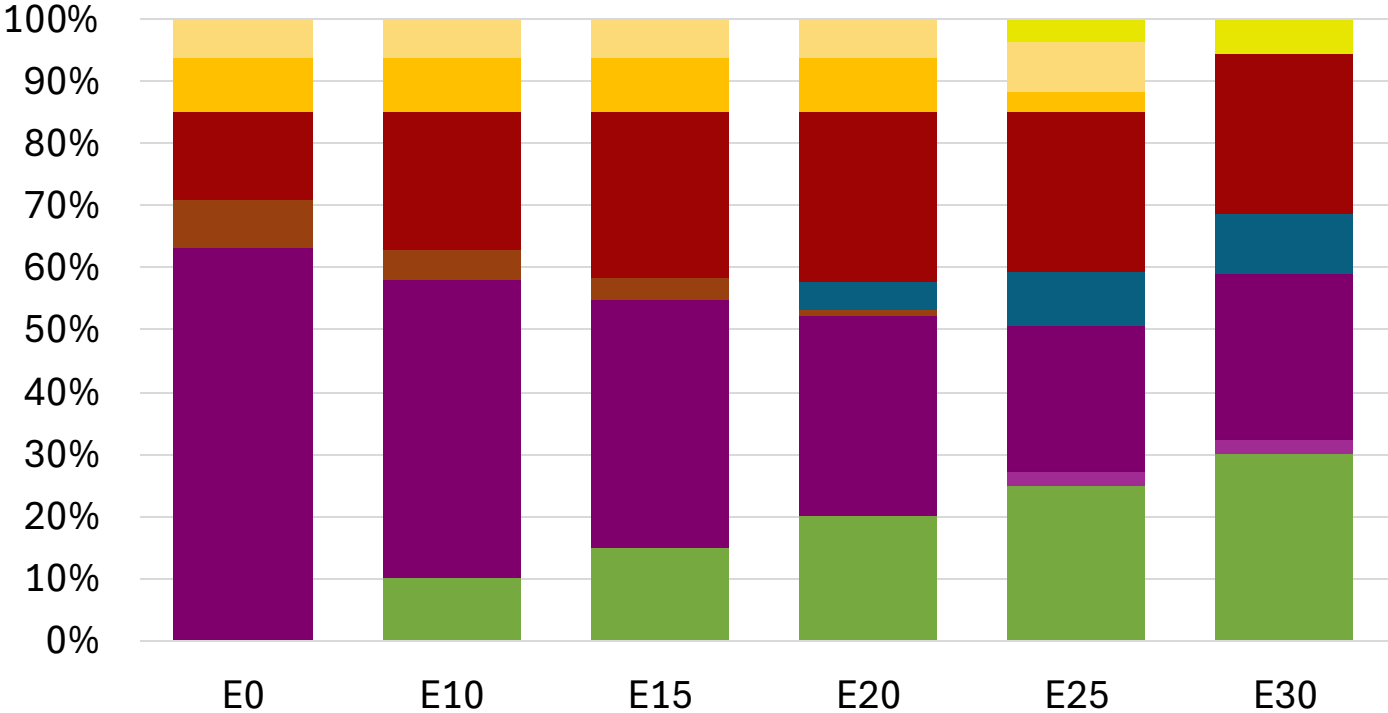



Ethanol
Alkylate
Raffinate
Reformate
n-Butane
Isomerate
Isopentane
Hydrocracked Gasoline
Catalytic Gasoline
Coker Naphtha
Light Primary Naphtha
Heavy Primary Naphtha
MTBE
ETBE
TAME
Aromatics

Average CIF 2024
Prices

Octane (RON)	98.0	98.0	98.0	98.0	98.0	98.0
Price (US\$/gal)	\$ 2.294	\$ 2.177	\$ 2.108	\$ 2.036	\$ 1.971	\$ 1.921

Source: Faro90

Estonia – Gasoline 95 – Increased Octane

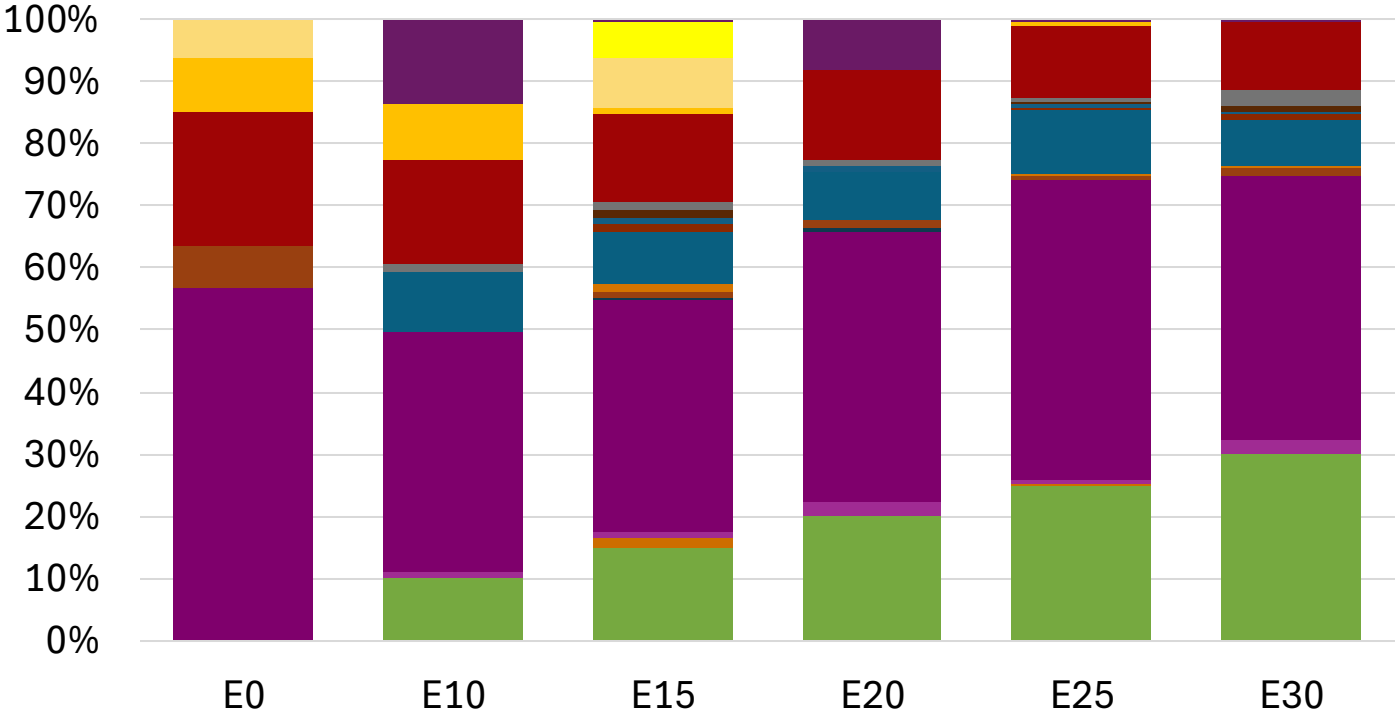



Ethanol
Alkylate
Raffinate
Reformate
n-Butane
Isomerate
Isopentane
Hydrocracked Gasoline
Catalytic Gasoline
Coker Naphtha
Light Primary Naphtha
Heavy Primary Naphtha
MTBE
ETBE
TAME
Aromatics

Average CIF 2024
Prices

Octane (RON)	95.0	96.2	98.3	98.7	100.5	101.8
Price (US\$/gal)	\$ 2.162	\$ 2.162	\$ 2.162	\$ 2.162	\$ 2.162	\$ 2.162

Source: Faro90

Estonia – Gasoline 98 – Increased Octane

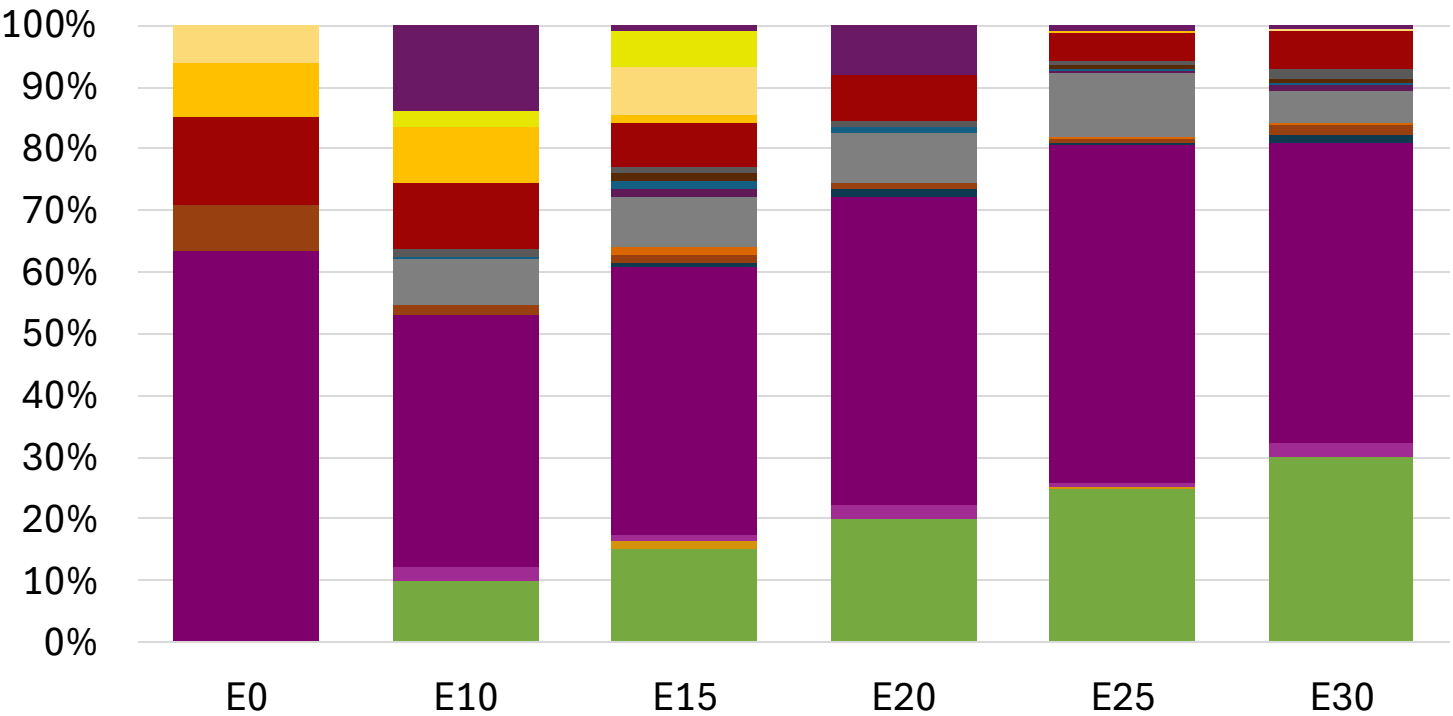

Average CIF 2024
Prices

Octane (RON)	98.0	99.0	100.9	101.2	102.8	104.1
Price (US\$/gal)	\$ 2.294	\$ 2.294	\$ 2.294	\$ 2.294	\$ 2.294	\$ 2.294

Source: Faro90

Vehicle Emission Impact for Ethanol Gasoline Blending

The model used in this analysis takes as a reference the [International Vehicle Emissions Model \(IVE\)](#).

The model uses the Base Emission Rates from IVE model, as well as its Adjustment Factors based on:


- Vehicle technology (cars, trucks, buses, motorcycles),
- Vehicle fleet average age,
- Average traveled distance per vehicle by country, as well as
- Geographical and climatic conditions (altitude, humidity, temperature).

Emissions of criteria pollutants, toxic pollutants, and greenhouse gases (GHG) were calculated and calibrated with emission inventories, using real gasoline quality data. The reduction rates for gasoline/ethanol blends were obtained from various sources (IPCC, US Grains, among others).


Emission estimations for different pollutants for gasoline and gasoline/ethanol blends (10%, 15%, 20%, 25% and 30% ethanol) were determined using the IVE Model. A comparison between the results and the European (Euro 6) requirements is made. Results are also compared with real emissions of the United States vehicle fleet*.

**Source: Bureau of transportation statistics.*

Main Results

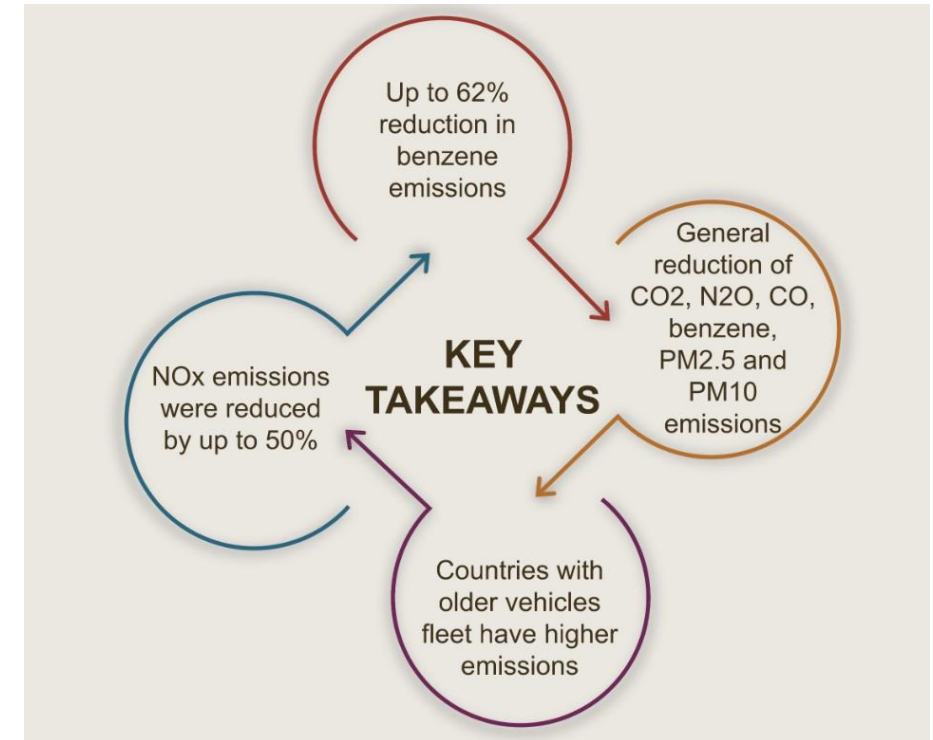

Gasoline Vehicle Fleet - Estonia







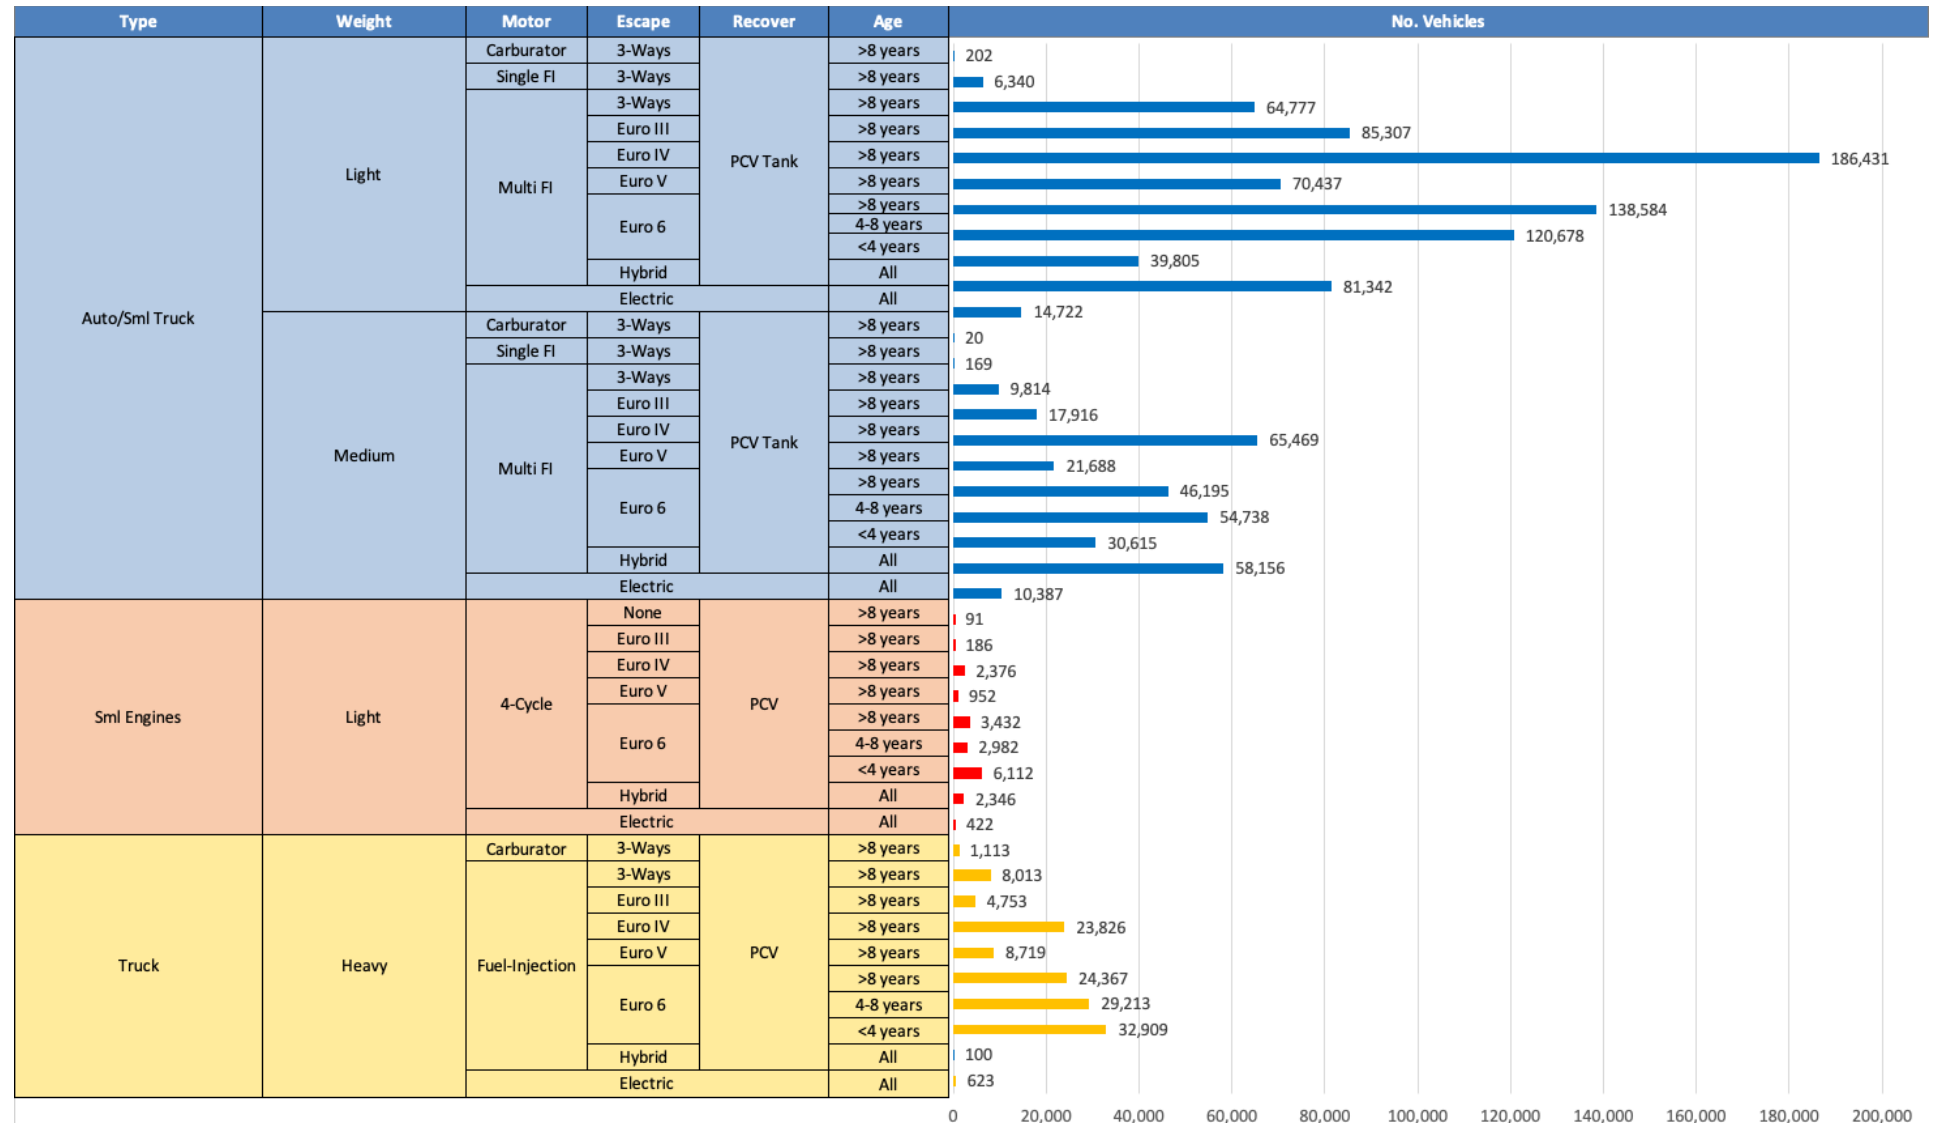


Vehicle Fleet: 1,276,323
Gasoline Vehicle Fleet: 616,792

Source: Eurostat, ACEA

Estonia – Vehicular Emissions

TIER III BIN 125 United States
Euro 6 Standard

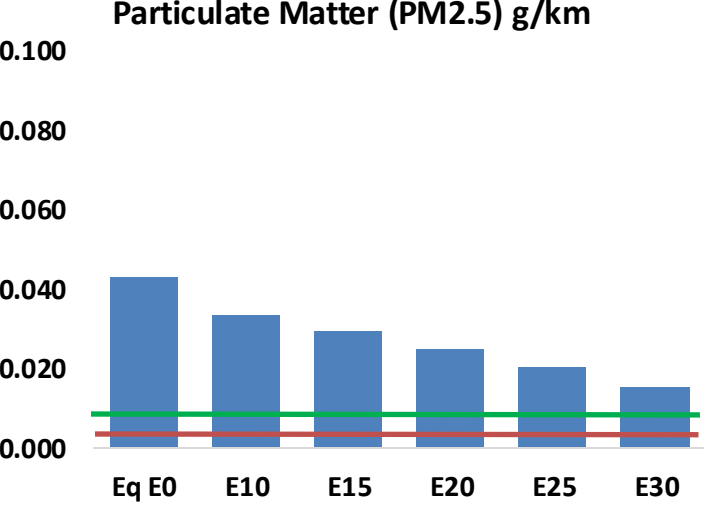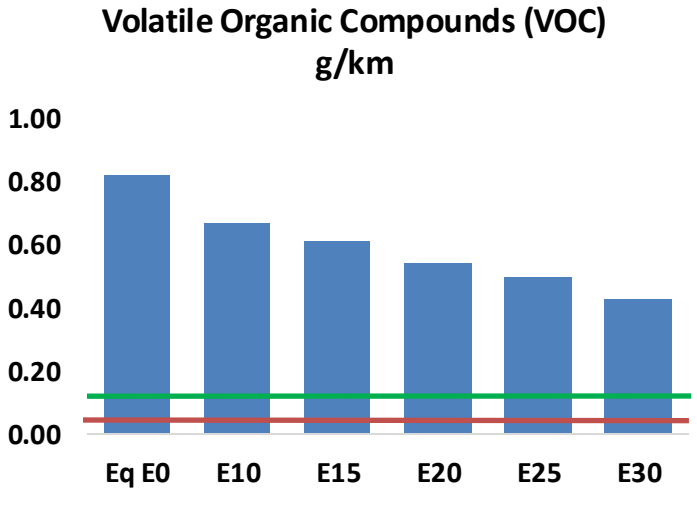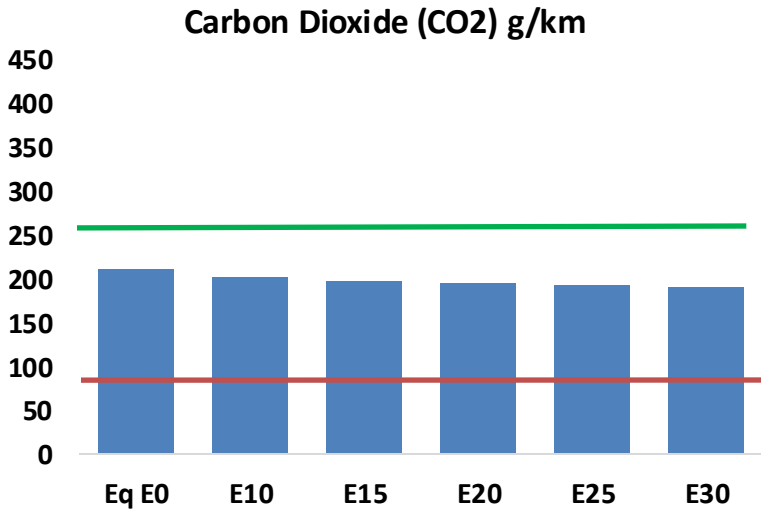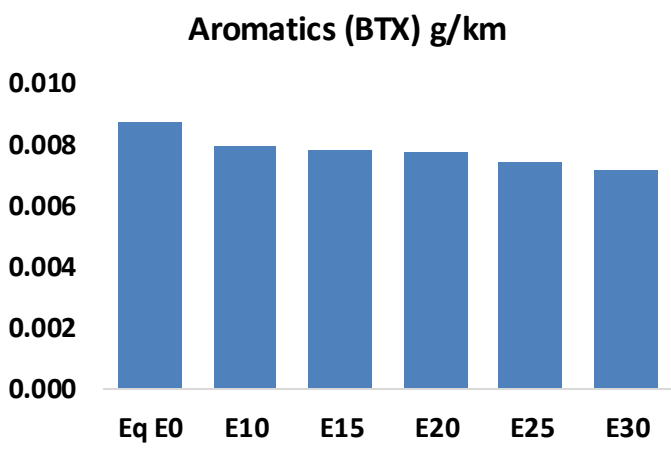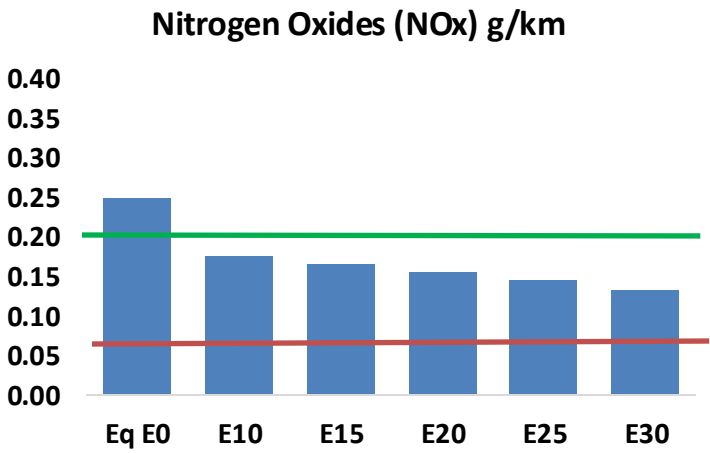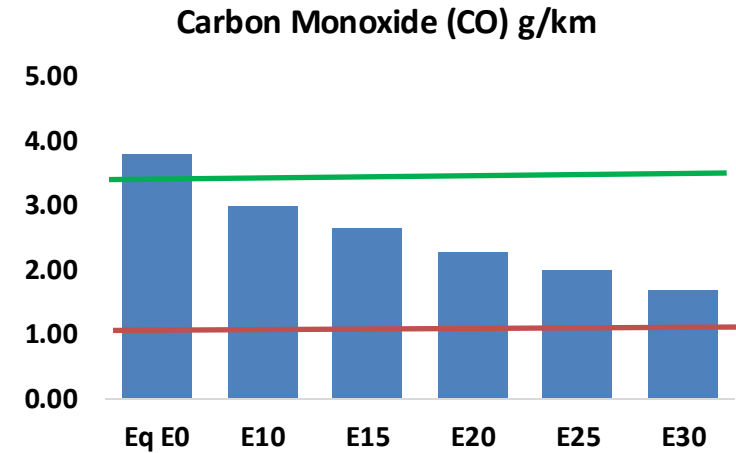

Estonia – Vehicular Emissions

Vehicular Fleet Emissions (kg/day)	Eq E0	E5	E10	E15	E20	E25	E30	Reduction (%)	
								E10	E20
CO	59,676	53,345	47,014	41,486	35,767	31,322	26,777	-21%	-40%
CO2	3,336,894	3,251,088	3,170,049	3,106,315	3,074,776	3,056,519	3,000,178	-5%	-8%
VOC	12,895	11,734	10,573	9,589	8,583	7,805	6,784	-18%	-33%
NOx	3,952	2,964	2,766	2,607	2,459	2,295	2,122	-30%	-38%
SOx	40	37	34	31	29	26	24	-15%	-28%
NH3	1,269	1,257	1,244	1,250	1,264	1,274	1,282	-2%	0%
N2O	53	53	53	53	54	55	55	-1%	2%
CH4	2,578	2,578	2,578	2,616	2,673	2,722	2,769	0%	4%
Lead	-	-	-	-	-	-	-	0%	0%
Butadiene	57	54	51	49	47	45	43	-10%	-18%
Acetaldehyde	199	228	335	510	695	794	938	68%	249%
Formaldehyde	758	737	859	1,009	1,057	1,169	1,273	13%	39%
Benzene	137	132	125	123	122	117	113	-9%	-11%
PM2.5	207	184	161	139	118	96	73	-22%	-43%
PM10	474	421	368	319	271	220	167	-22%	-43%


Life Cycle GHG Emissions

The Global Agenda for Climate Action calls for countries, cities and regions, businesses, and members of civil society around the world to achieve a low-carbon and climate-resilient economies in support of the Paris Agreement. Road Transportation accounts for 15% of total GHG emissions (IPCC,2023).


Ethanol gasoline blends are an internationally adopted practice that offer significant short-term benefits. Biofuels are an important solution to achieve reduction targets in the transportation sector.

Country GHG emission reductions are calculated using **RED II/III** and **GREET** life cycle emission methodologies and the **International Vehicular Emissions Model (IVE)**. Results are compared to the current country targets for 2035. Current 2024 country emission are those published by **IPCC**.



Current GHG Global Emissions Distribution

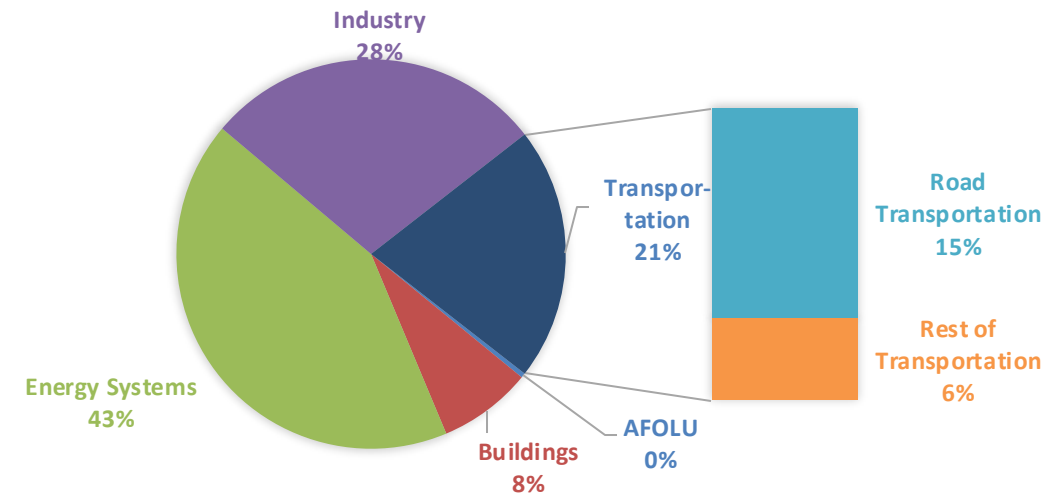

IPCC Transport Sector Sustainable Development Goals and climate policies Scenario, 2023

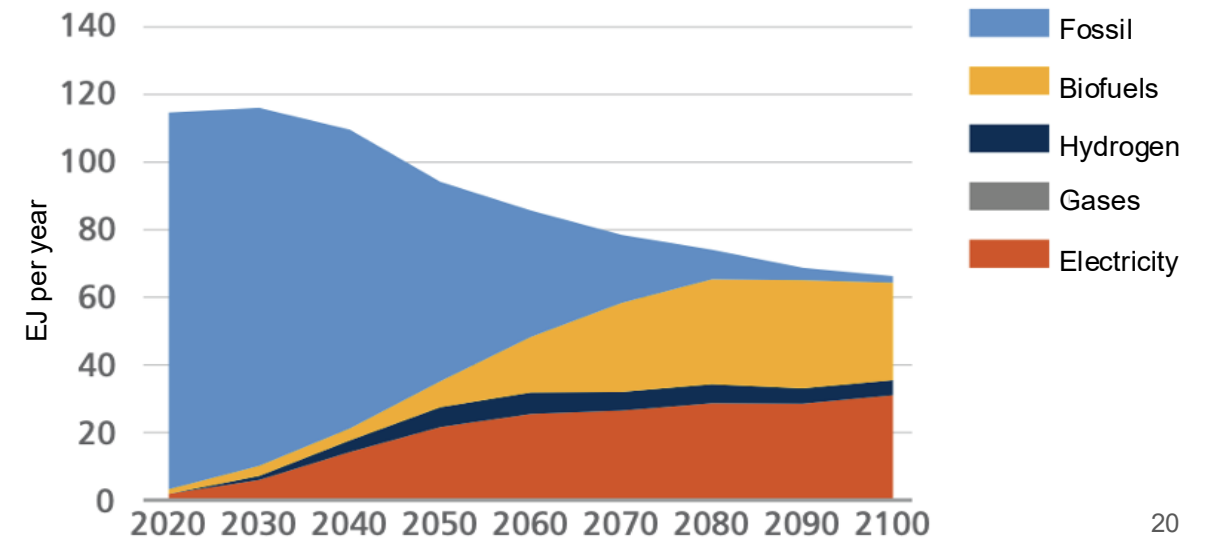

Estonia – Gasoline Vehicle Fleet Life Cycle GHG Emissions

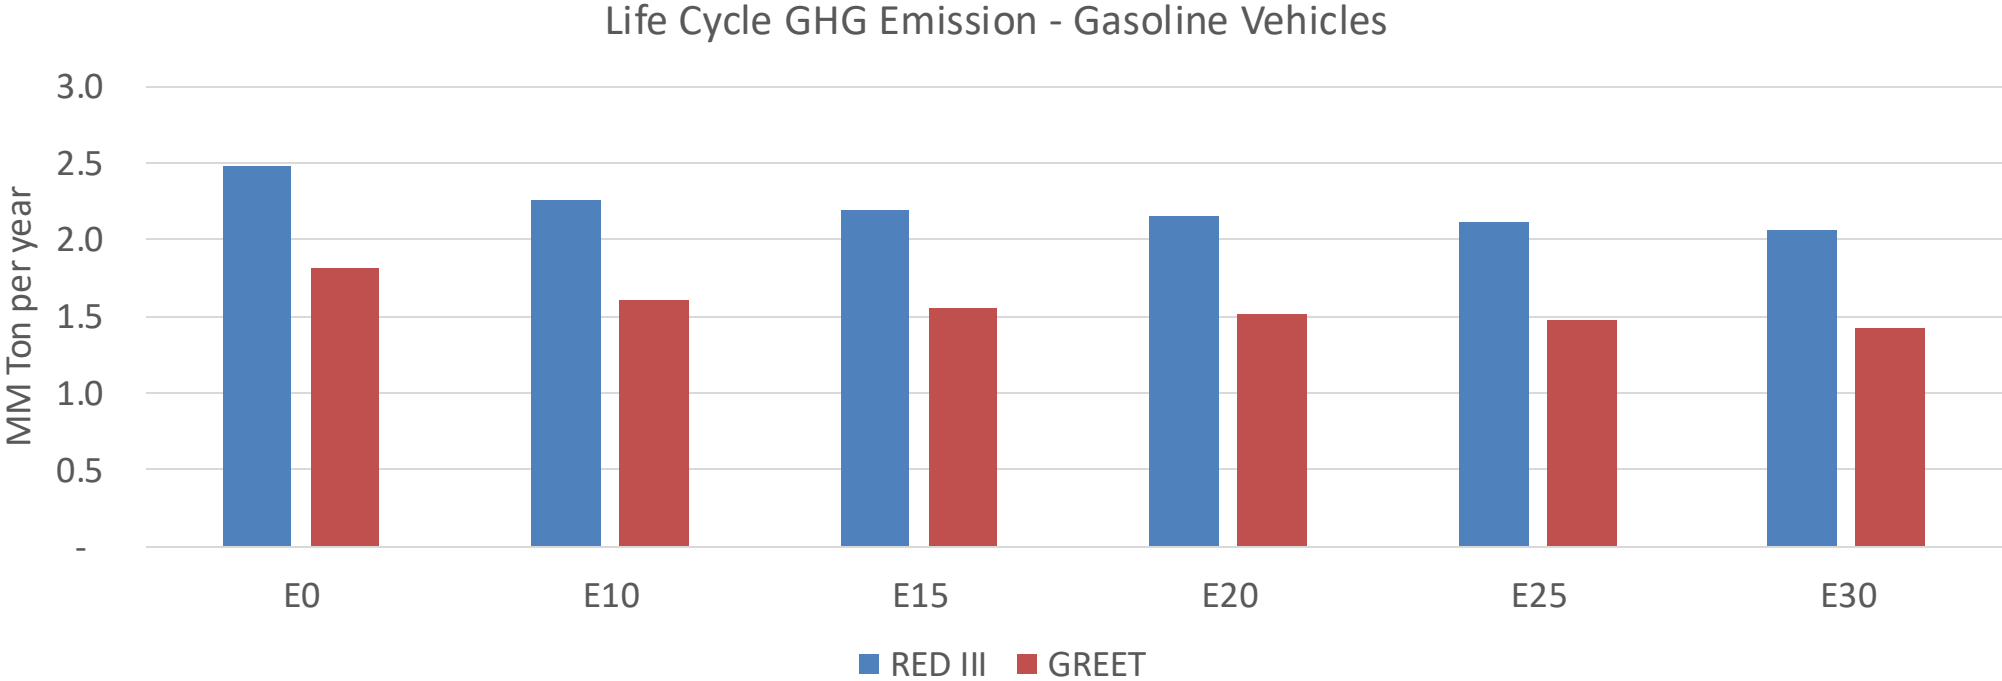

Country Emissions 2024 (MMT/año)	15.6
Target @ 2035 (MMT/year)	8.8
Delta	6.8

%Reduction vs E0	E0	E10	E15	E20	E25	E30
GREET 2024	0.0%	11.7%	14.5%	16.7%	18.7%	21.5%
RED II/III	0.0%	8.9%	11.1%	12.8%	14.4%	16.6%

% Target@2035	E0	E10	E15	E20	E25	E30
GREET 2024	0.0%	3.1%	3.9%	4.4%	5.0%	5.7%
RED II/III	0.0%	3.2%	4.0%	4.7%	5.2%	6.0%

Source: Greet, RED II/III, IPCC, climateactiontracker.org, F90