


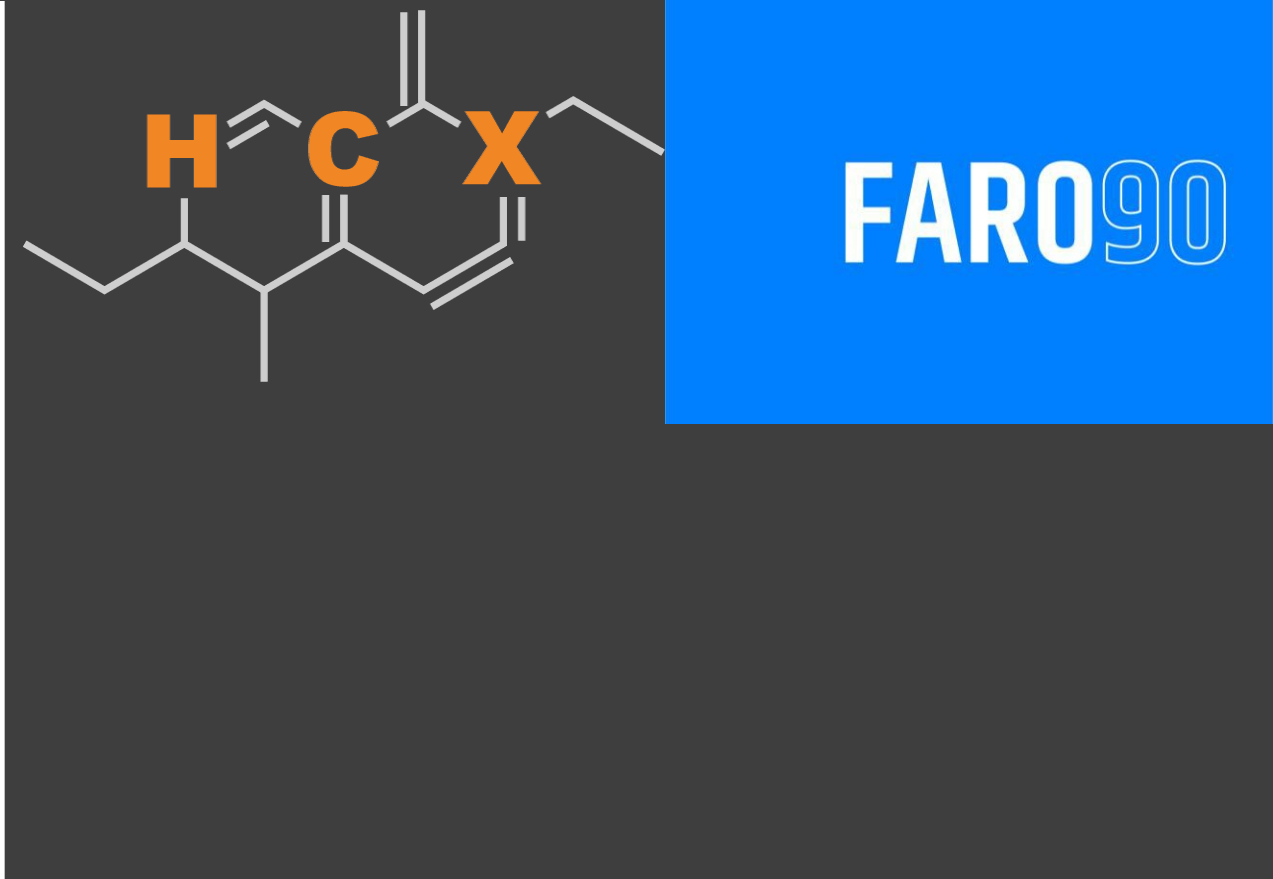

Ethanol Blending in Gasoline - Sweden

September, 2025

Ethanol Blending in Europe

There are important fuel quality and environmental impact of vehicle emission challenges in the Region.

- The use of ethanol improves gasoline quality and creates flexibility in gasoline production.
- Ethanol use is a cost-effective way to increase gasoline octane and to replace more expensive gasoline components.
- Ethanol contributes to transport decarbonization and air quality improvement.
- There are opportunities across Europe to increase the ethanol blend level and implement new policies on the use of gasoline-ethanol blends.



Twenty eight countries with potential and additional use of ethanol were studied: 1) Gasoline market profiles; 2) Optimization of gasoline blends with ethanol and, 3) Environmental impact of gasolines blended with ethanol.

Ethanol Gasoline Blending in Sweden




In 2024, gasoline consumption in Sweden was 2,316 million liters (612 million gallons) and growth rate was -4.5%. Gasoline production and net imports were 6,510 and -4,194 million liters (1,720 and -1,108 million gallons) correspondingly. Sweden complies with the European gasoline standards and offers two main grades: RON 95 and RON 98) with an average octane of 95.2 RON.

In 2024, ethanol consumption in Sweden was 178 million liters (47 million gallons) representing 7.7% of gasoline demand. Ethanol production and Net Imports were 133 and 45 million liters (47 and 12 million gallons) correspondingly. Ethanol sources are Wood 25% and Cereals 75%.

Source: Eurostat, European Commission


Gasoline Demand in Sweden

Gasoline Demand by Grade in Sweden

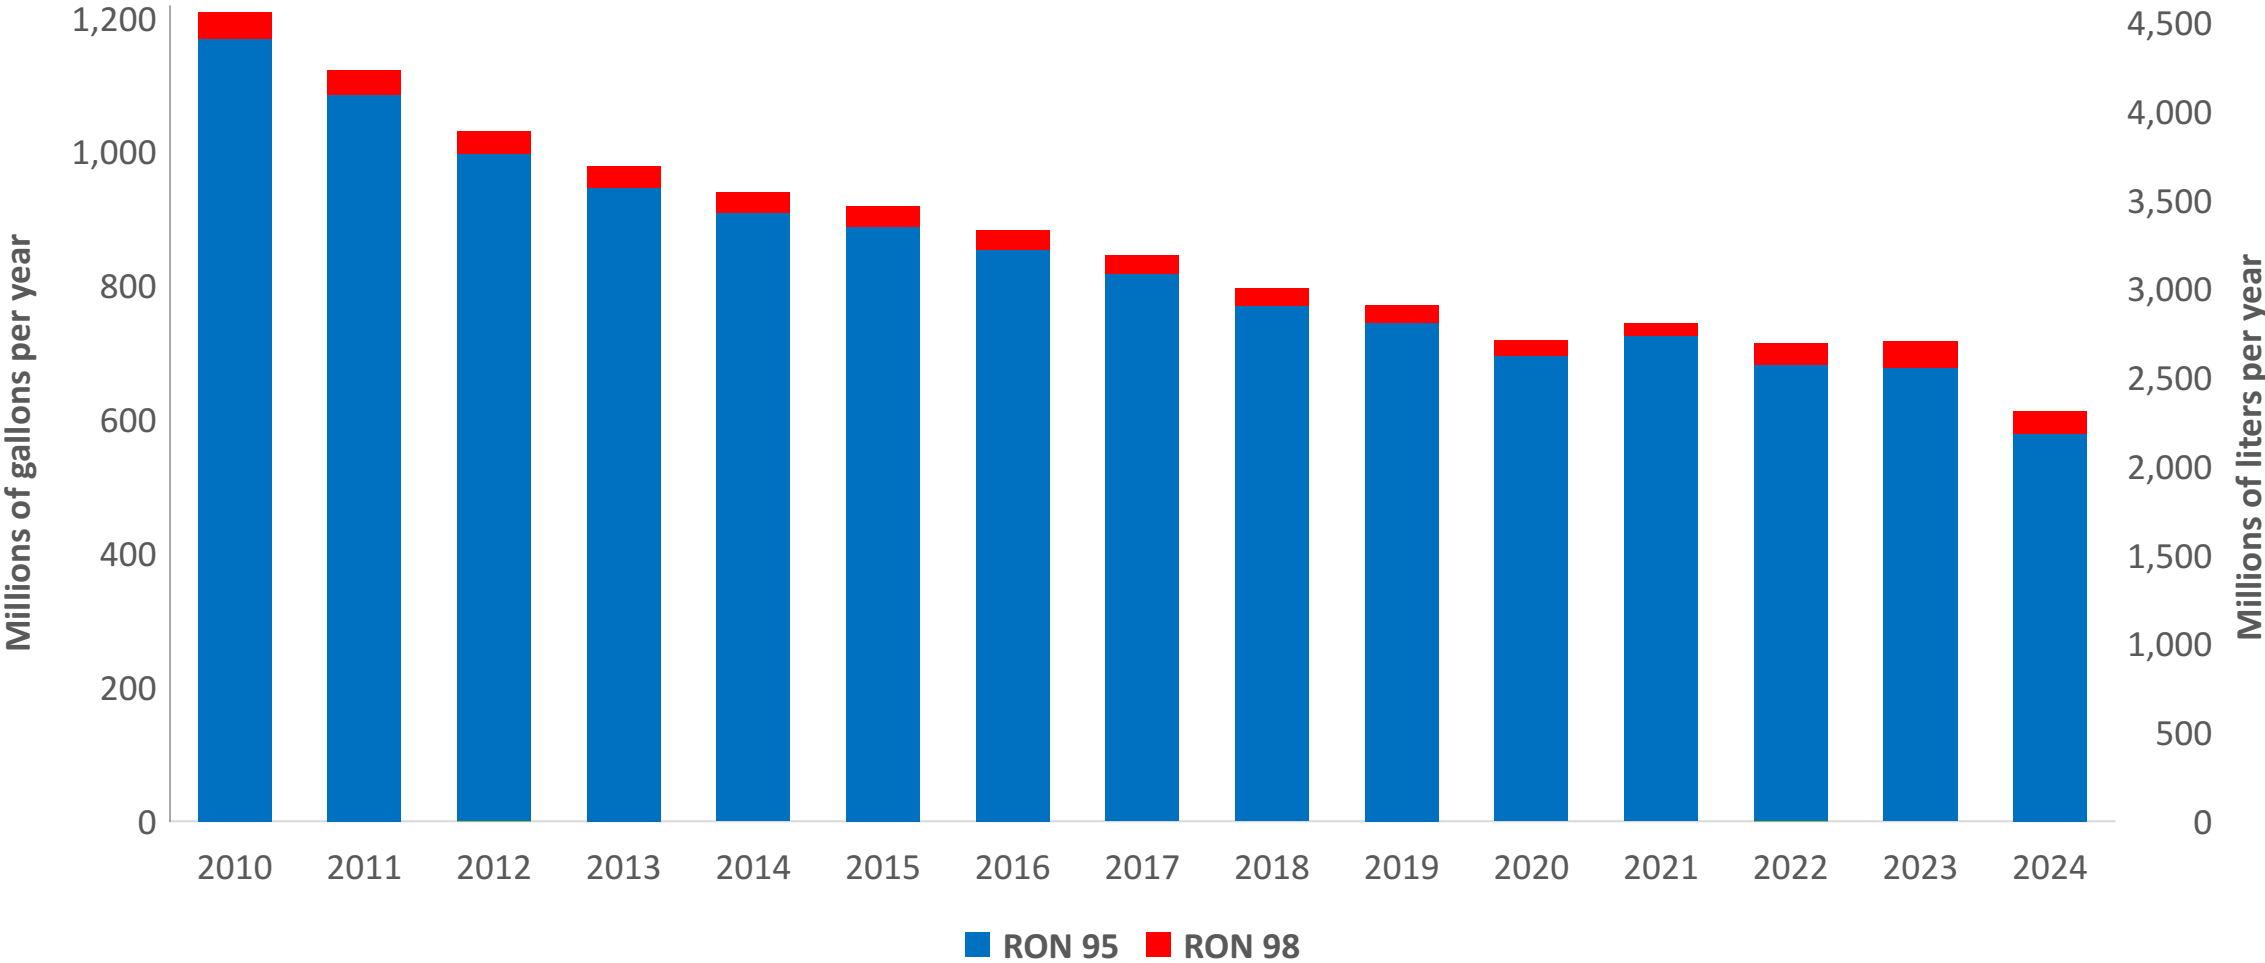


Source: Eurostat


Gasoline Production in Sweden

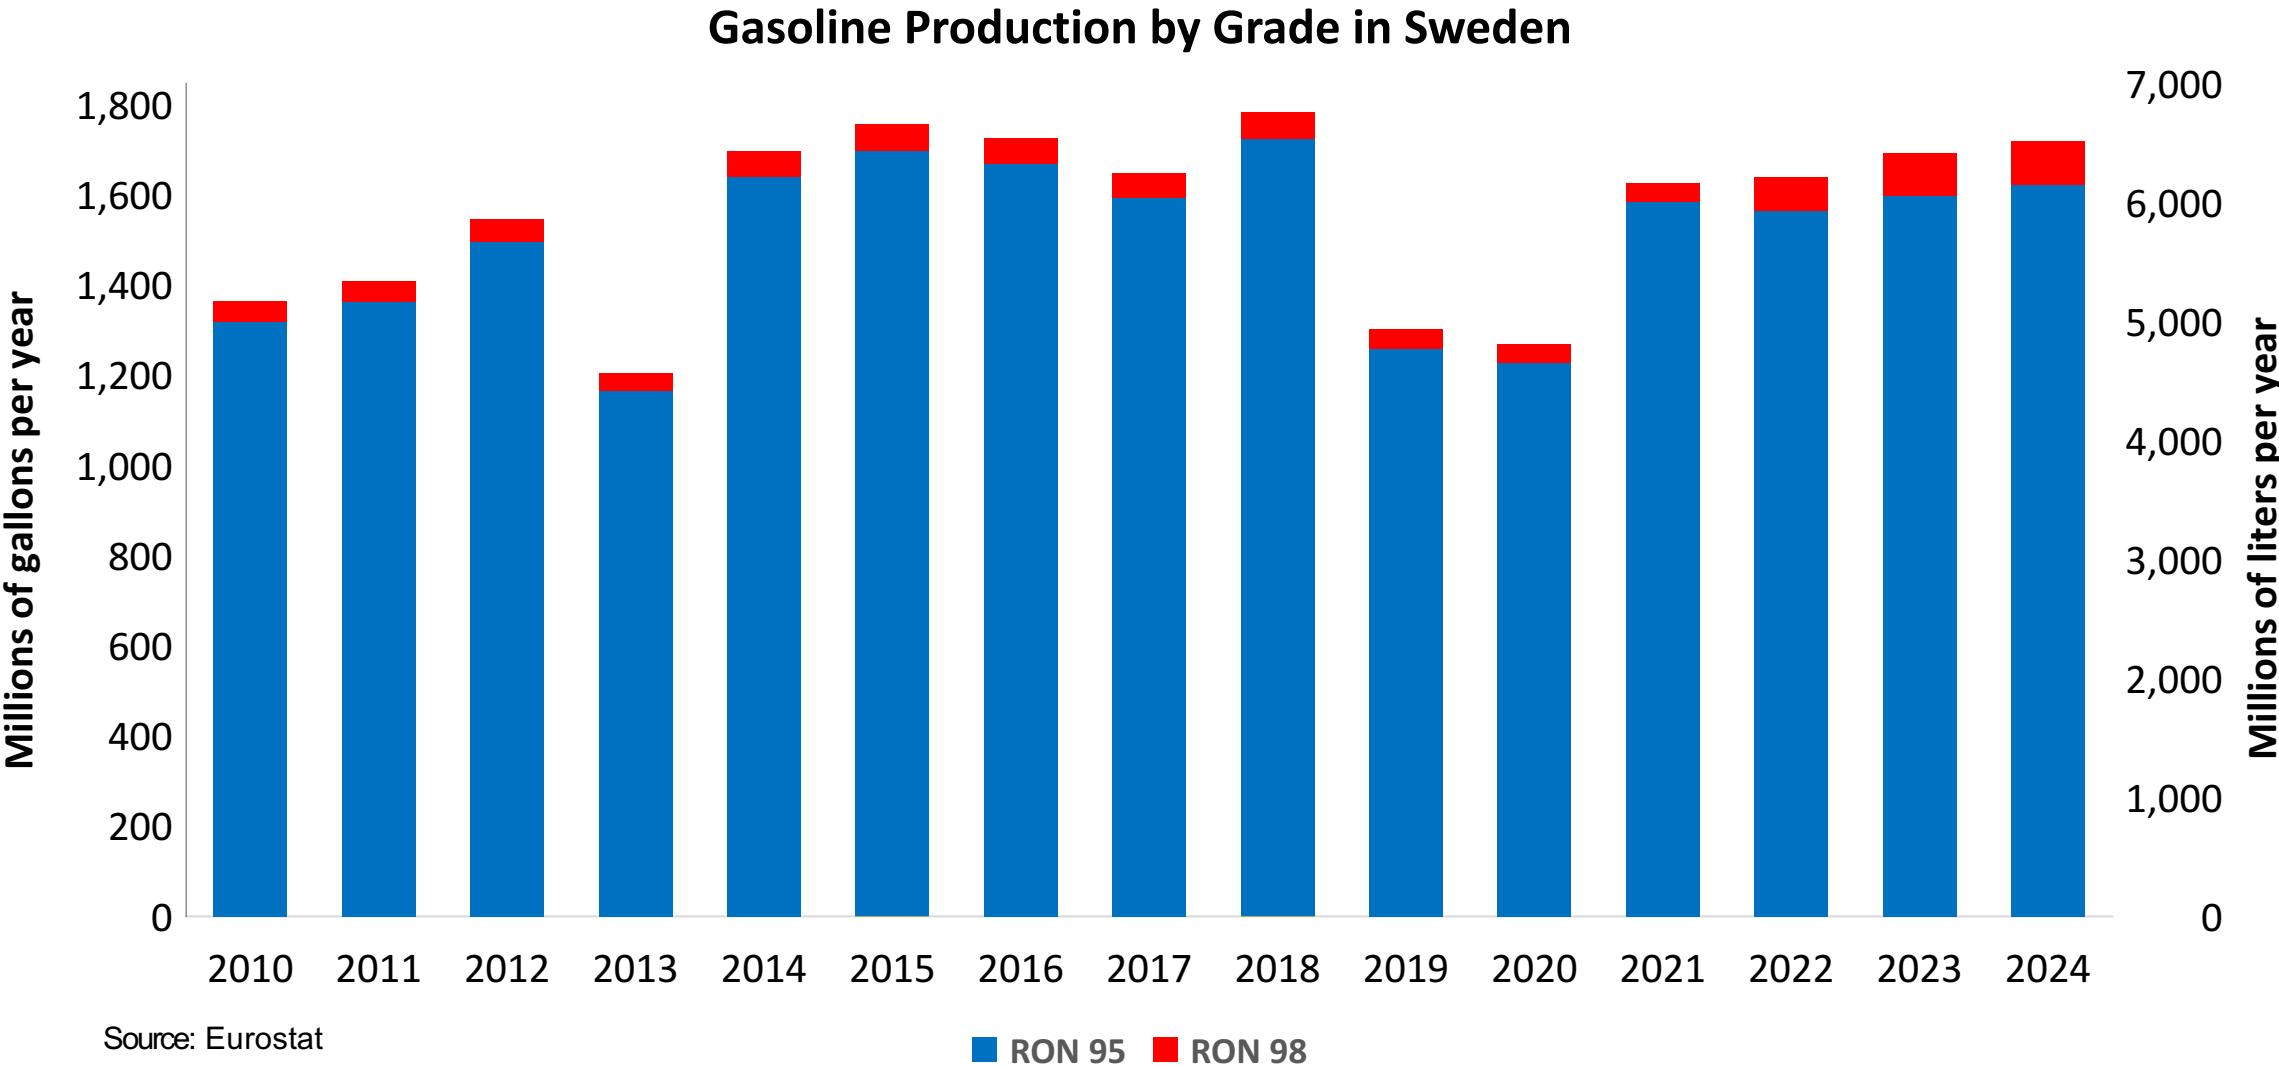

Gasoline Imports in Sweden

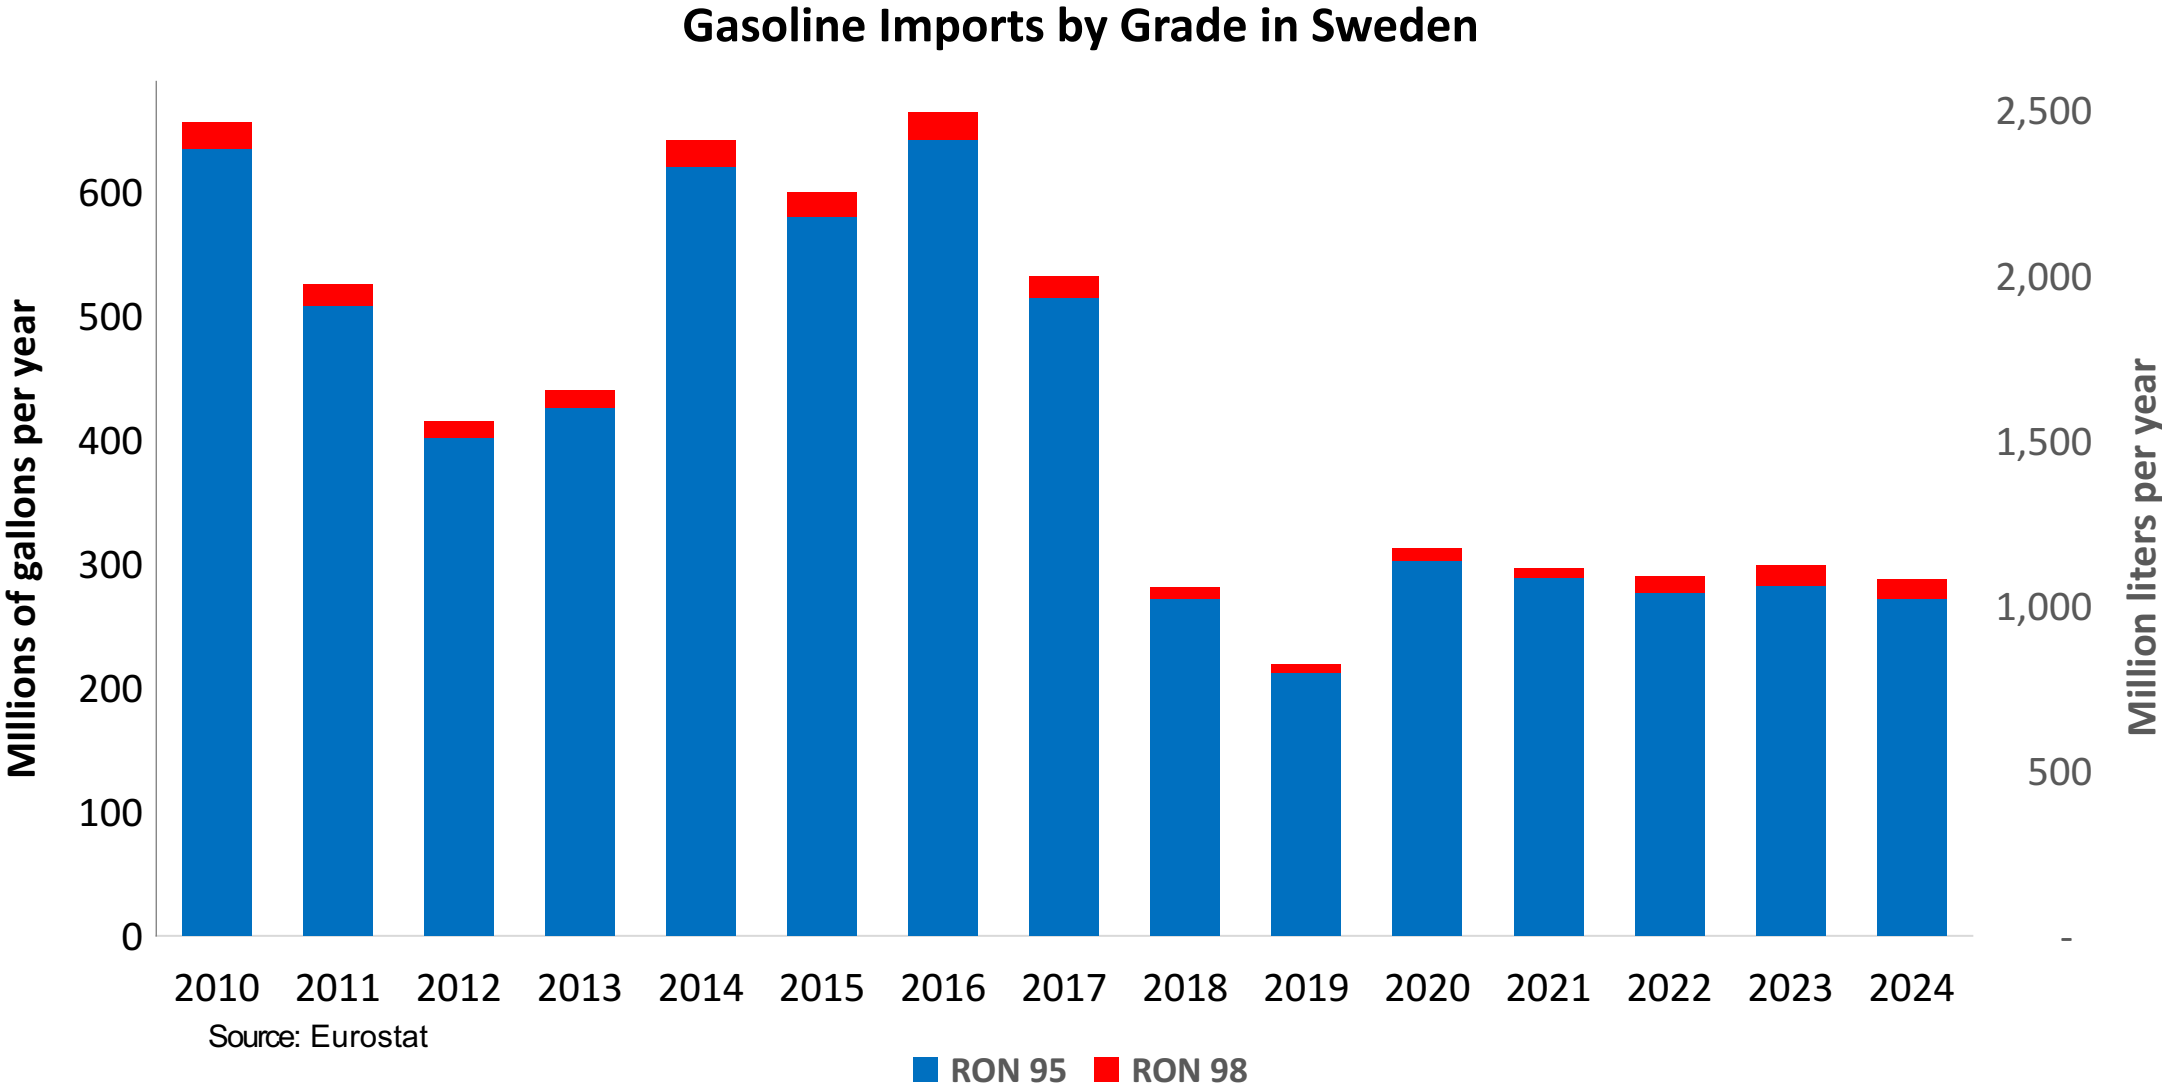


Gasoline Exports in Sweden

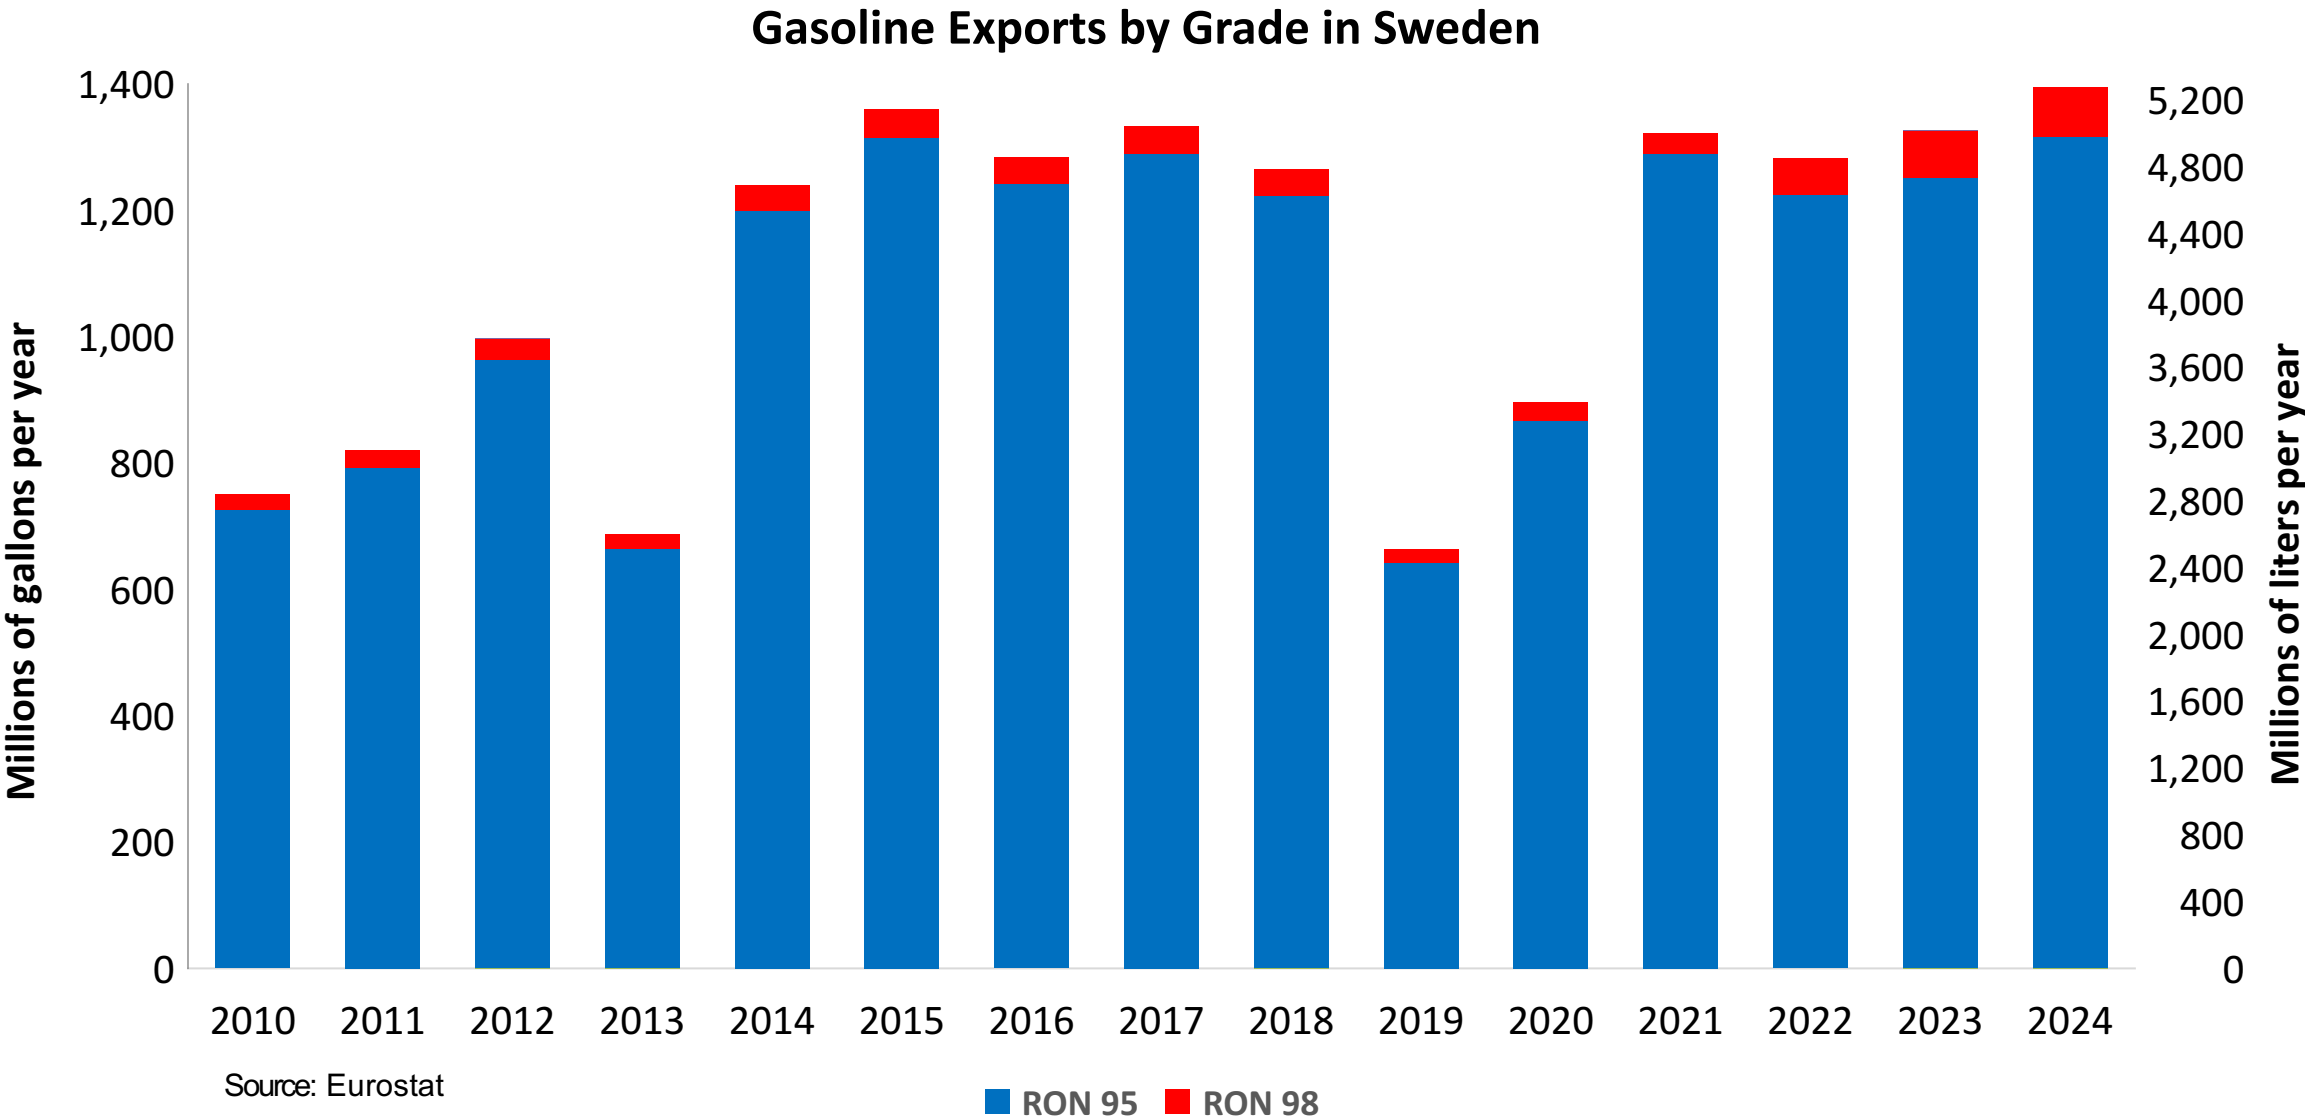

Ethanol Balance in Sweden

Ethanol Balance in Sweden

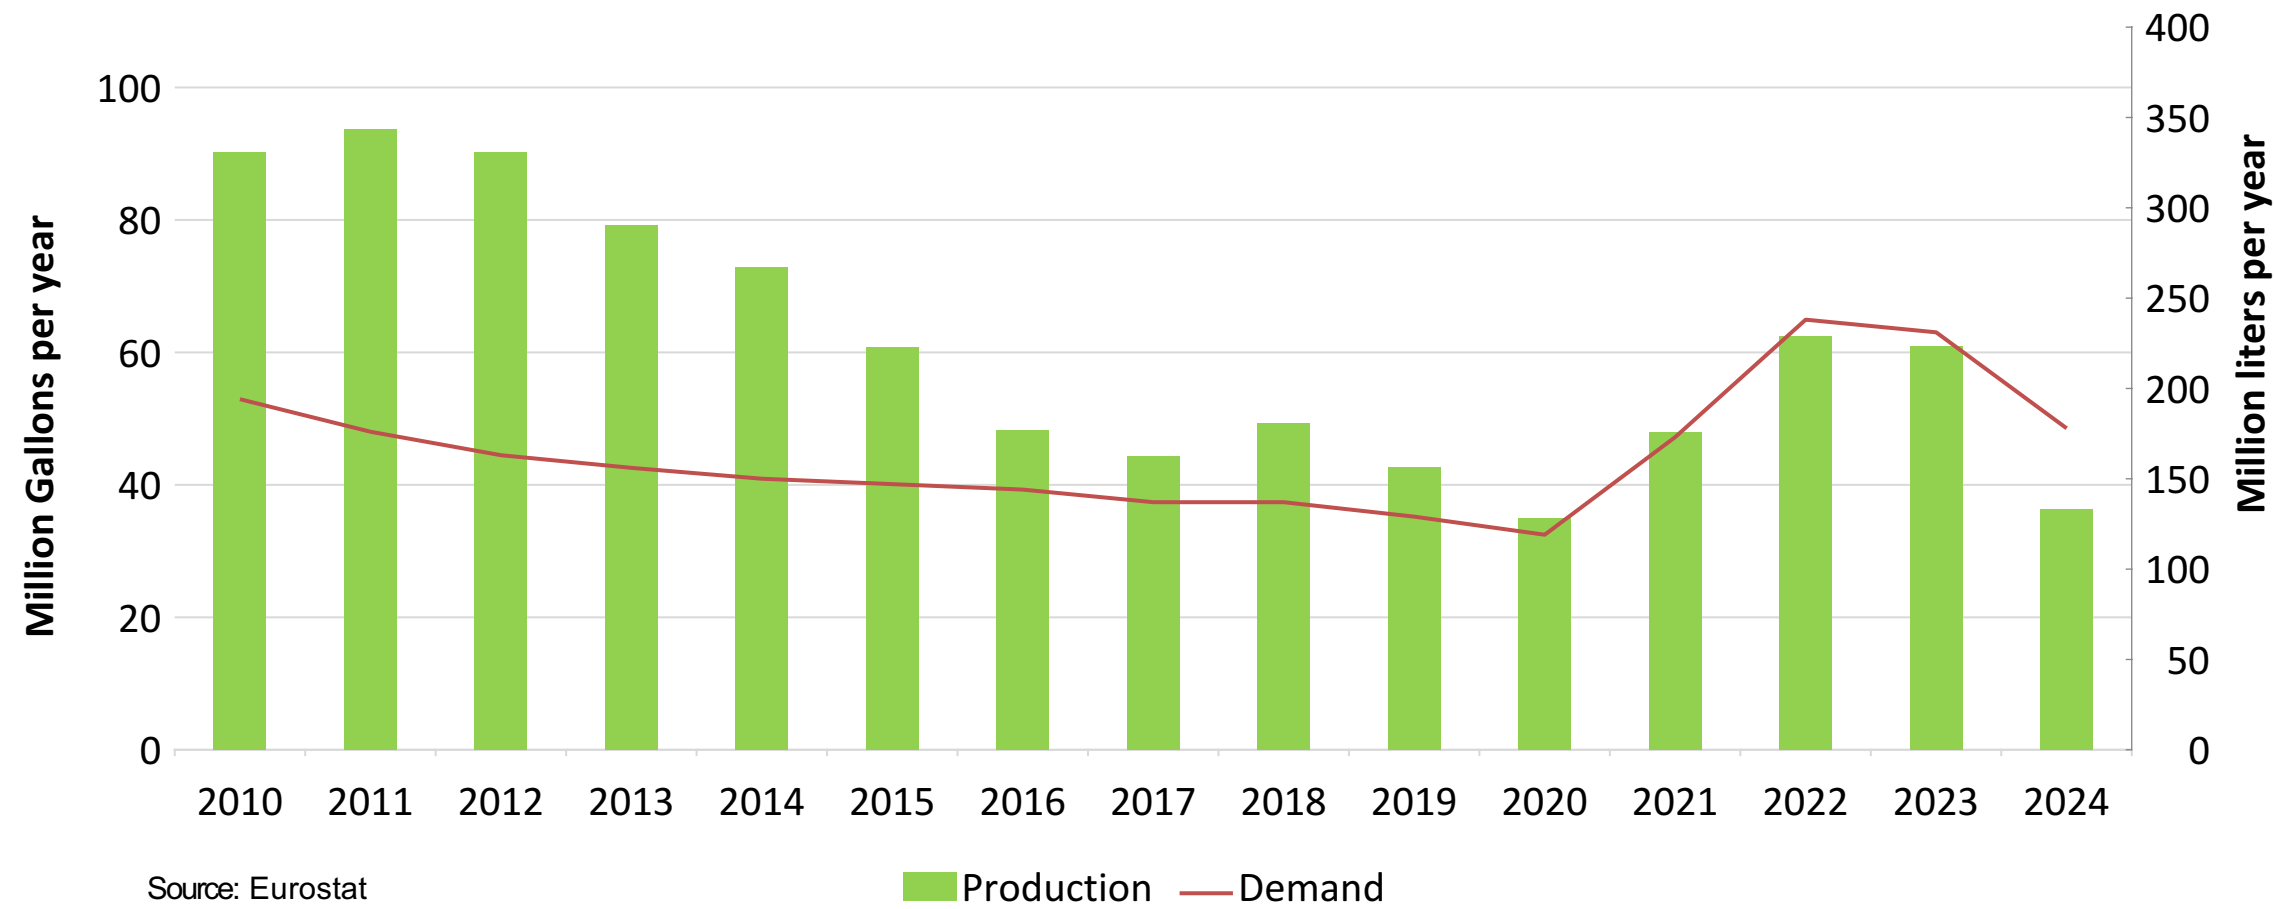

Gasoline Quality in Sweden

Name	EN 228:2025 (Euro 6); Country Level Fuel Ordinances							
Implementation Date	2025							
Applicability	All EU Contries + UK							
Grade	RON 95 E5		RON 95 E10		RON 98 E5		RON 98 E10	
	Min	Max	Min	Max	Min	Max	Min	Max
RON	95.0		95.0		98.0		98.0	
MON	> 85	> 88	> 85	> 88	> 85	> 88	> 85	> 88
AKI								
Benzene (%vol)	< 1							
Aromatics (% vol)	< 35							
Olefins (%vol)	< 18							
Lead (g/L)	< 0.005							
Manganese (mg/L)	< 2,0							
Sulfur (ppm)	10.0							
Oxygen (%w)*	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7
Ethanol (%vol)	< 5	< 10	< 5	< 10	< 5	< 10	< 5	< 10
PVR 37.8°C (psi)	<> 45 - 100 kPa in 6 Volatility Classes							
Overall Biofuels (%cal)	-							
Advanced Biofuels (%cal)	-							
Bioethanol in Gasoline Sales (%cal)	-							
GHG Emission Reduction (%)	6.0							

* Methanol 3%, Iso-propyl alcohol 12%, Ter-butyl alcohol 15%, Iso-butyl alcohol 15%, Ethers +5 Carbons 22%, Other Oxygenates 15%

Source: European Commision

The FARO90 logo is shown in a blue box, and a chemical structure is displayed to its right.

Catalytic Gasoline
Light Primary Naphta
Heavy Primary Naphta
Reformate
Isopentane
Alkylate
Isomerate
Hydrocracked Gasoline
Coker Naphta
n-Butane
MTBE
ETBE
TAME
Aromatics

Country	0-17	18-34	35-54	55-74	75+	Male	Female	Lower Education	Higher Education	Lower Income	Higher Income	Lower Mobility	Higher Mobility
Austria	14%	16%	16%	16%	14%	14%	16%	16%	16%	14%	14%	14%	16%
Belgium	19%	17%	17%	17%	17%	19%	17%	17%	17%	17%	17%	17%	17%
Bulgaria	10%	10%	13%	17%	10%	10%	17%	17%	17%	10%	10%	10%	17%
Croatia	15%	16%	16%	17%	16%	15%	16%	16%	16%	16%	16%	16%	16%
Cyprus	16%	13%	13%	17%	17%	16%	17%	17%	17%	17%	17%	17%	17%
Czechia	10%	10%	13%	17%	10%	10%	17%	17%	17%	10%	10%	10%	17%
Denmark	14%	16%	16%	17%	16%	14%	16%	16%	16%	14%	14%	14%	16%
Estonia	10%	10%	13%	17%	10%	10%	17%	17%	17%	10%	10%	10%	17%
Finland	10%	10%	13%	17%	10%	10%	17%	17%	17%	10%	10%	10%	17%
France	20%	20%	20%	17%	13%	20%	20%	17%	17%	13%	13%	13%	17%
Germany	14%	16%	16%	17%	16%	14%	16%	16%	16%	14%	14%	14%	16%
Greece	16%	13%	13%	17%	17%	16%	17%	17%	17%	17%	17%	17%	17%
Hungary	12%	16%	16%	17%	17%	12%	16%	17%	17%	17%	17%	17%	17%
Ireland	5%	15%	16%	17%	17%	5%	15%	17%	17%	17%	17%	17%	17%
Italy	15%	16%	17%	17%	16%	15%	16%	16%	16%	16%	16%	16%	16%
Latvia	10%	10%	13%	17%	10%	10%	17%	17%	17%	10%	10%	10%	17%
Lithuania	10%	10%	13%	17%	10%	10%	17%	17%	17%	10%	10%	10%	17%
Luxembourg	14%	16%	16%	17%	16%	14%	16%	16%	16%	14%	14%	14%	16%
Malta	15%	16%	17%	17%	16%	15%	16%	16%	16%	16%	16%	16%	16%
Netherlands	19%	17%	17%	17%	17%	19%	17%	17%	17%	17%	17%	17%	17%
Poland	10%	10%	13%	17%	10%	10%	17%	17%	17%	10%	10%	10%	17%
Portugal	14%	15%	15%	17%	16%	14%	15%	15%	15%	15%	15%	15%	15%
Romania	10%	10%	13%	17%	10%	10%	17%	17%	17%	10%	10%	10%	17%
Slovakia	10%	10%	13%	17%	10%	10%	17%	17%	17%	10%	10%	10%	17%
Slovenia	14%	16%	16%	17%	16%	14%	16%	16%	16%	14%	14%	14%	16%
Spain	14%	15%	15%	17%	16%	14%	15%	15%	15%	15%	15%	15%	15%
Sweden	14%	16%	16%	17%	16%	14%	16%	16%	16%	14%	14%	14%	16%
UK	5%	15%	16%	17%	17%	5%	15%	17%	17%	17%	17%	17%	17%


Gasoline Blending Optimization

In some parts of the world, ethanol is added to gasoline as a blending component. The advantages of ethanol include that it is a renewable fuel made of biomass; that it is an octane booster that helps to dilute sulfur; and that it allows the fulfillment of environmental objectives. To determine the optimal components to be blended with ethanol, a **blending model** was used. This model selects the components to add in the gasoline/ethanol blend based on:


- Components prices,
- Properties each component affects,
- Quality parameters by country, and
- Component availability by country.

Through iterations, the model obtains the %v/v of the components to be blended with 10%, 15%, 20%, 25% and 30% of ethanol, in such a way that the final blend complies with the required properties of a finished gasoline by country.

The blending model uses gasoline component spot average prices 2024 and provides fuel prices that do not include country distribution costs, local taxes and subsidies and import or gas station margins.

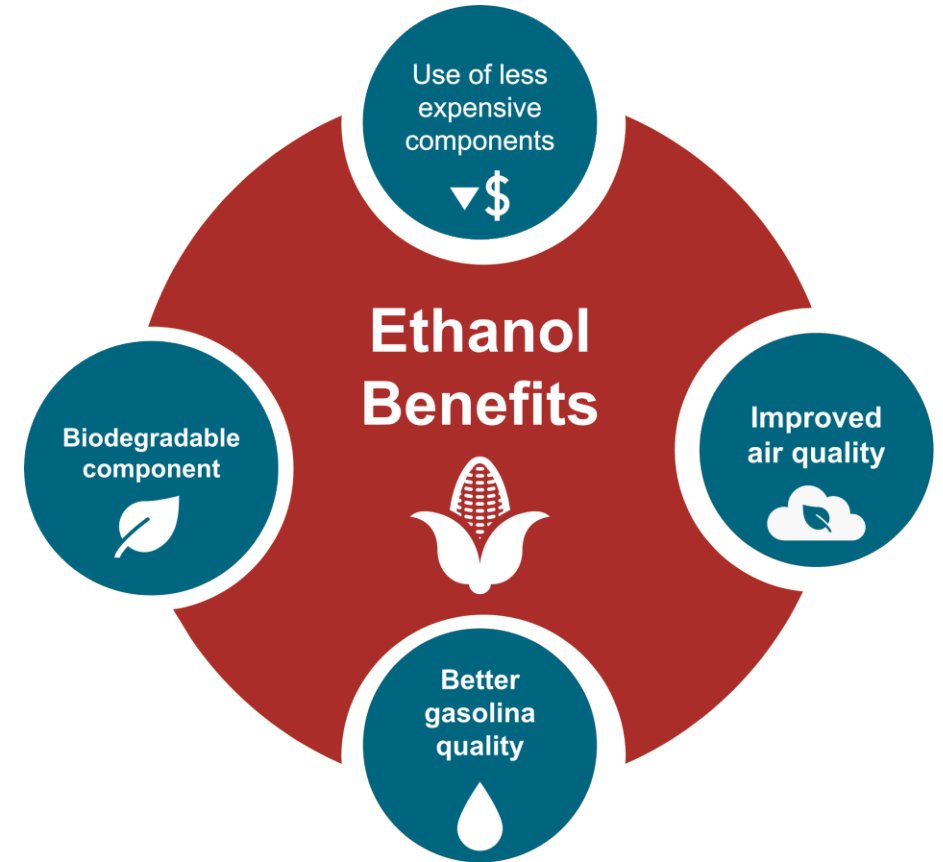


Sweden Available Blending Components

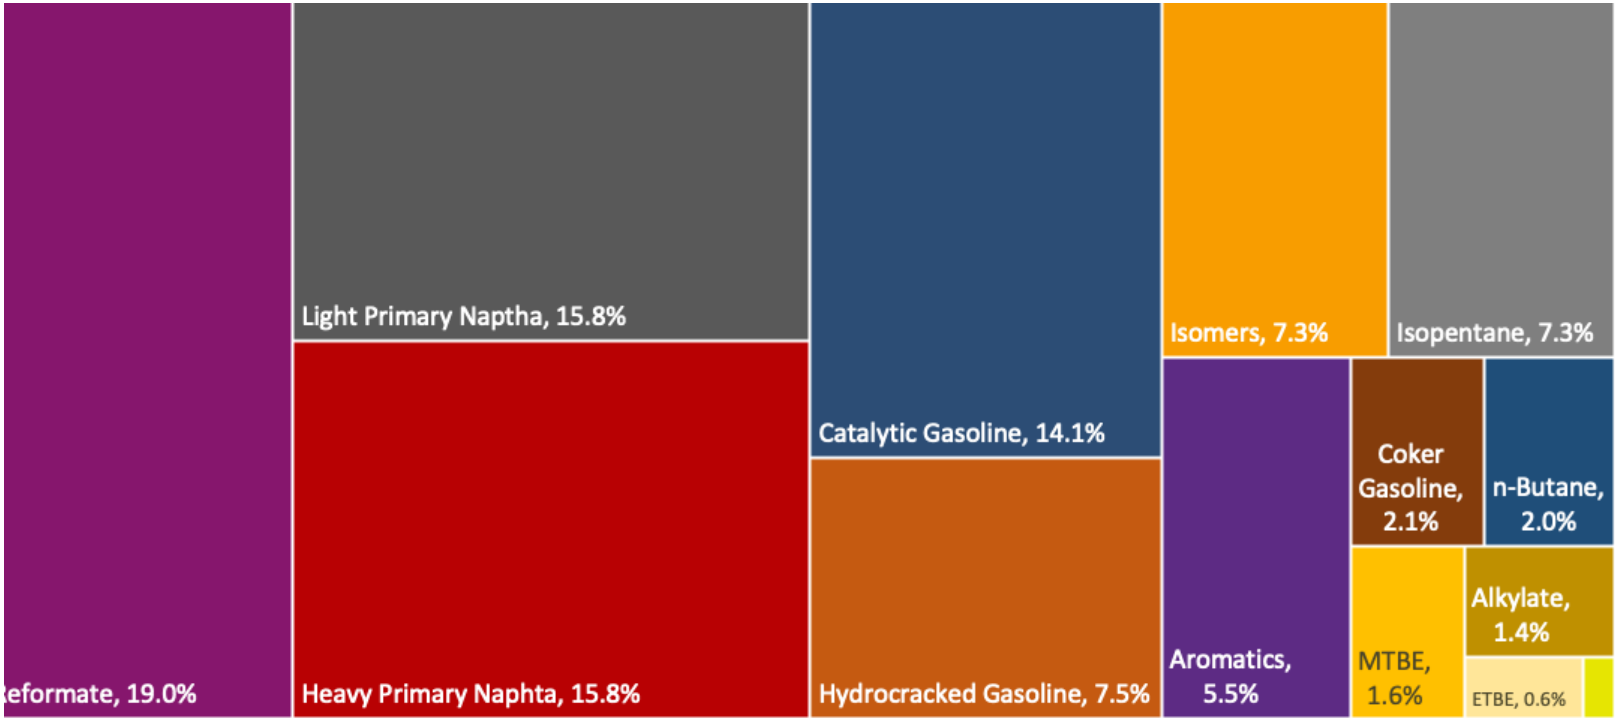

TAME,
0.2%

Sweden – Gasoline 95 – Constant Octane


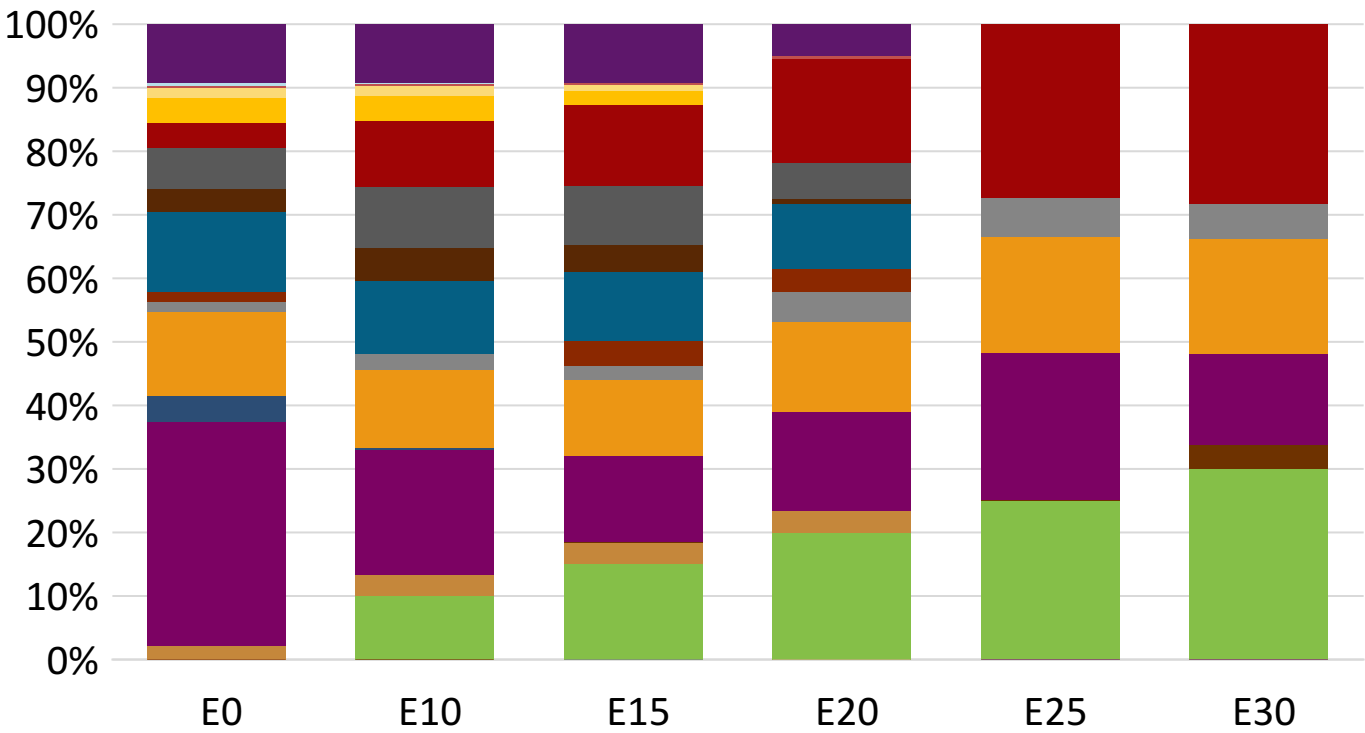


Average CIF 2024 Prices

Octane (RON)	95.0	95.0	95.0	95.0	95.1	95.6
Price (US\$/gal)	\$ 2.312	\$ 2.184	\$ 2.123	\$ 2.042	\$ 1.920	\$ 1.854

Source: Faro90

Sweden - Gasoline 98 - Constant Octane

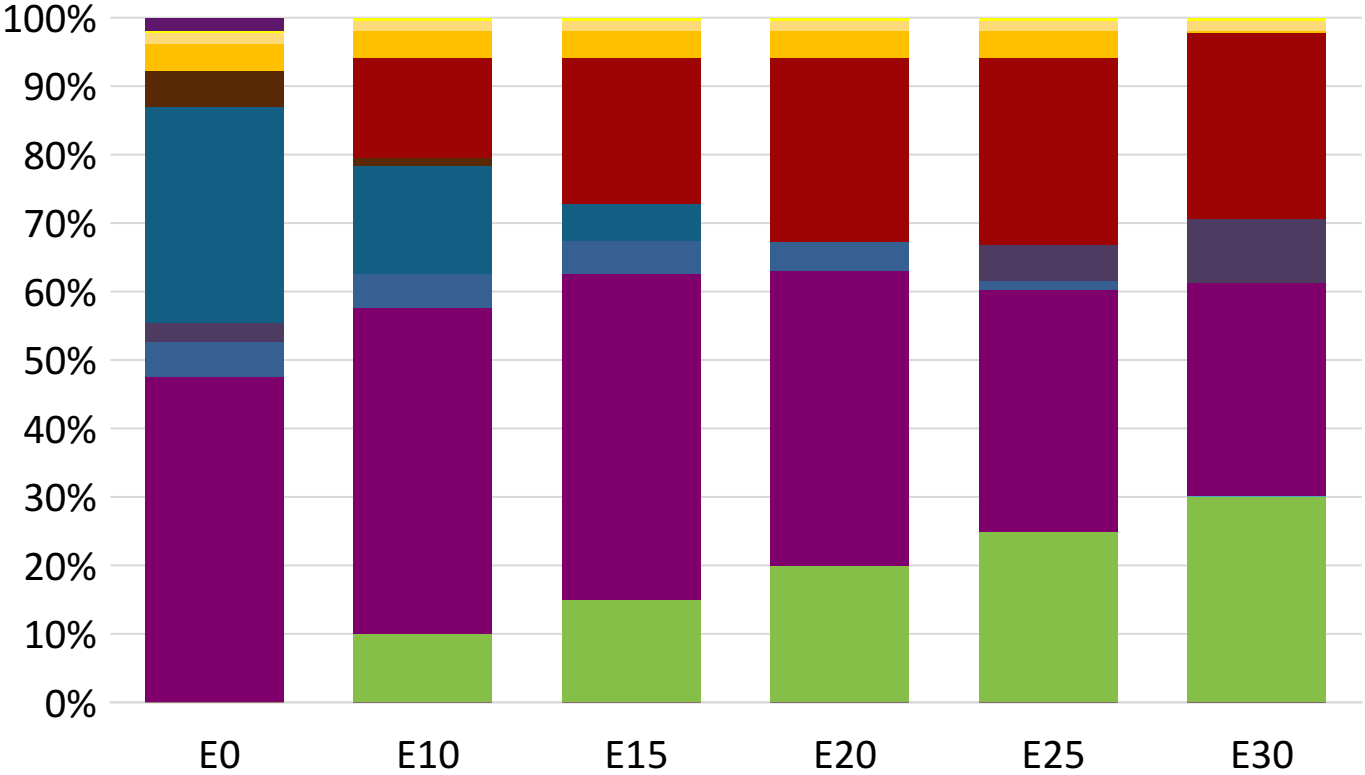


Average CIF 2024 Prices

Octane (RON)	98.0	98.0	98.0	98.0	98.0	98.0
Price (US\$/gal)	\$ 2.387	\$ 2.258	\$ 2.186	\$ 2.109	\$ 2.032	\$ 1.965

Source: Faro90

Sweden – Gasoline 95 – Increased Octane

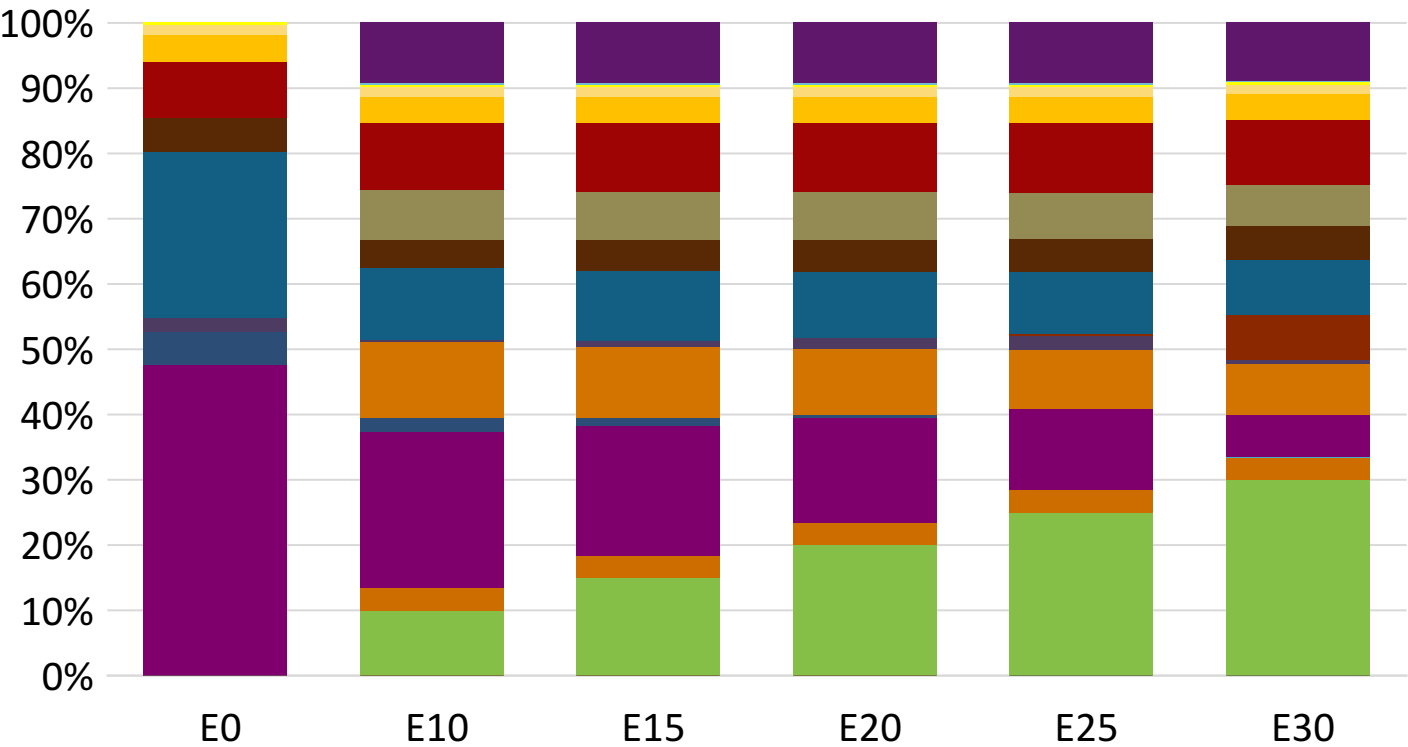


Average CIF 2024 Prices

Octane (RON)	95.0	96.5	97.9	99.4	100.8	102.0
Price (US\$/gal)	\$ 2.249	\$ 2.249	\$ 2.249	\$ 2.249	\$ 2.249	\$ 2.249

Source: Faro90

Sweden – Gasoline 98 – Increased Octane

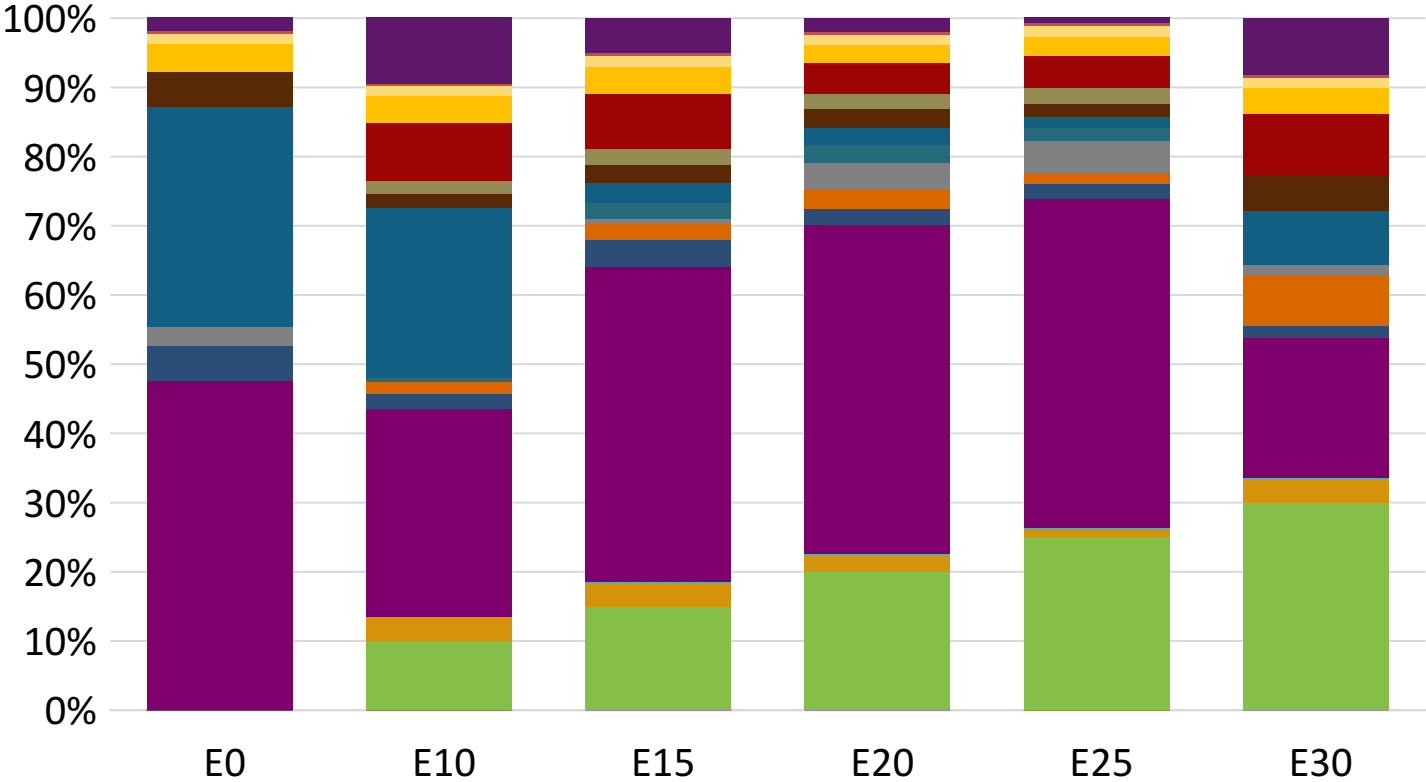

Average CIF 2024 Prices

Octane (RON)		98.0	99.2	101.3	102.6	104.0	104.7
Price (US\$/gal)	\$	2.387	\$ 2.387	\$ 2.387	\$ 2.387	\$ 2.387	\$ 2.387

Source: Faro90

Vehicle Emission Impact for Ethanol Gasoline Blending

The model used in this analysis takes as a reference the [International Vehicle Emissions Model \(IVE\)](#).


The model uses the Base Emission Rates from IVE model, as well as its Adjustment Factors based on:

- Vehicle technology (cars, trucks, buses, motorcycles),
- Vehicle fleet average age,
- Average traveled distance per vehicle by country, as well as
- Geographical and climatic conditions (altitude, humidity, temperature).

Emissions of criteria pollutants, toxic pollutants, and greenhouse gases (GHG) were calculated and calibrated with emission inventories, using real gasoline quality data. The reduction rates for gasoline/ethanol blends were obtained from various sources (IPCC, US Grains, among others).


Emission estimations for different pollutants for gasoline and gasoline/ethanol blends (10%, 15%, 20%, 25% and 30% ethanol) were determined using the IVE Model. A comparison between the results and the European (Euro 6) requirements is made. Results are also compared with real emissions of the United States vehicle fleet*.

Main Results

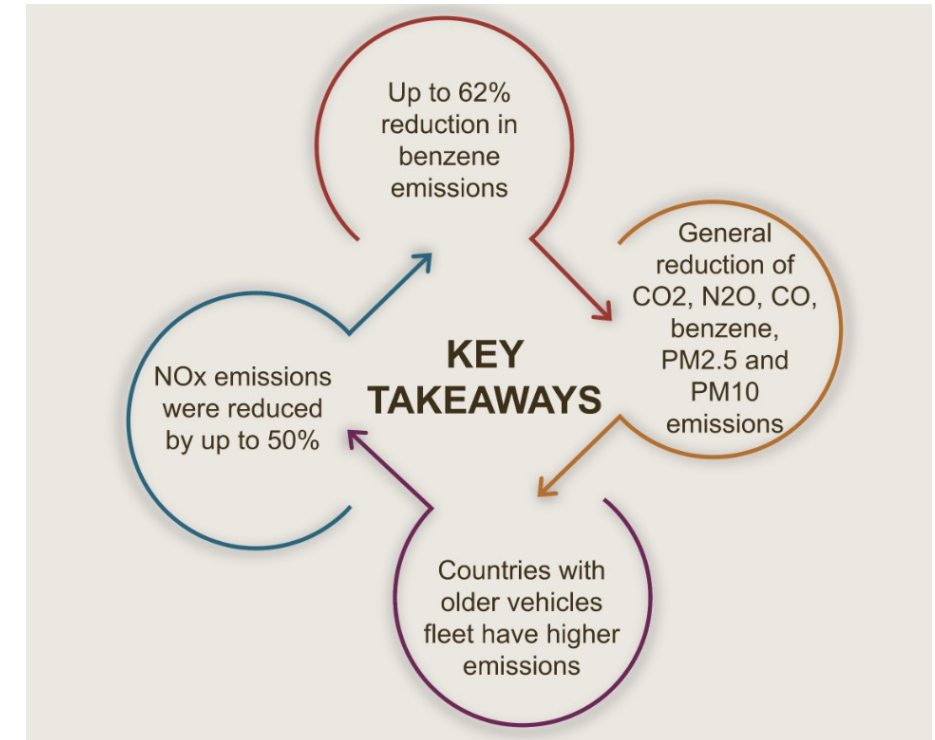

*Source: Bureau of transportation statistics.

Gasoline Vehicle Fleet - Sweden







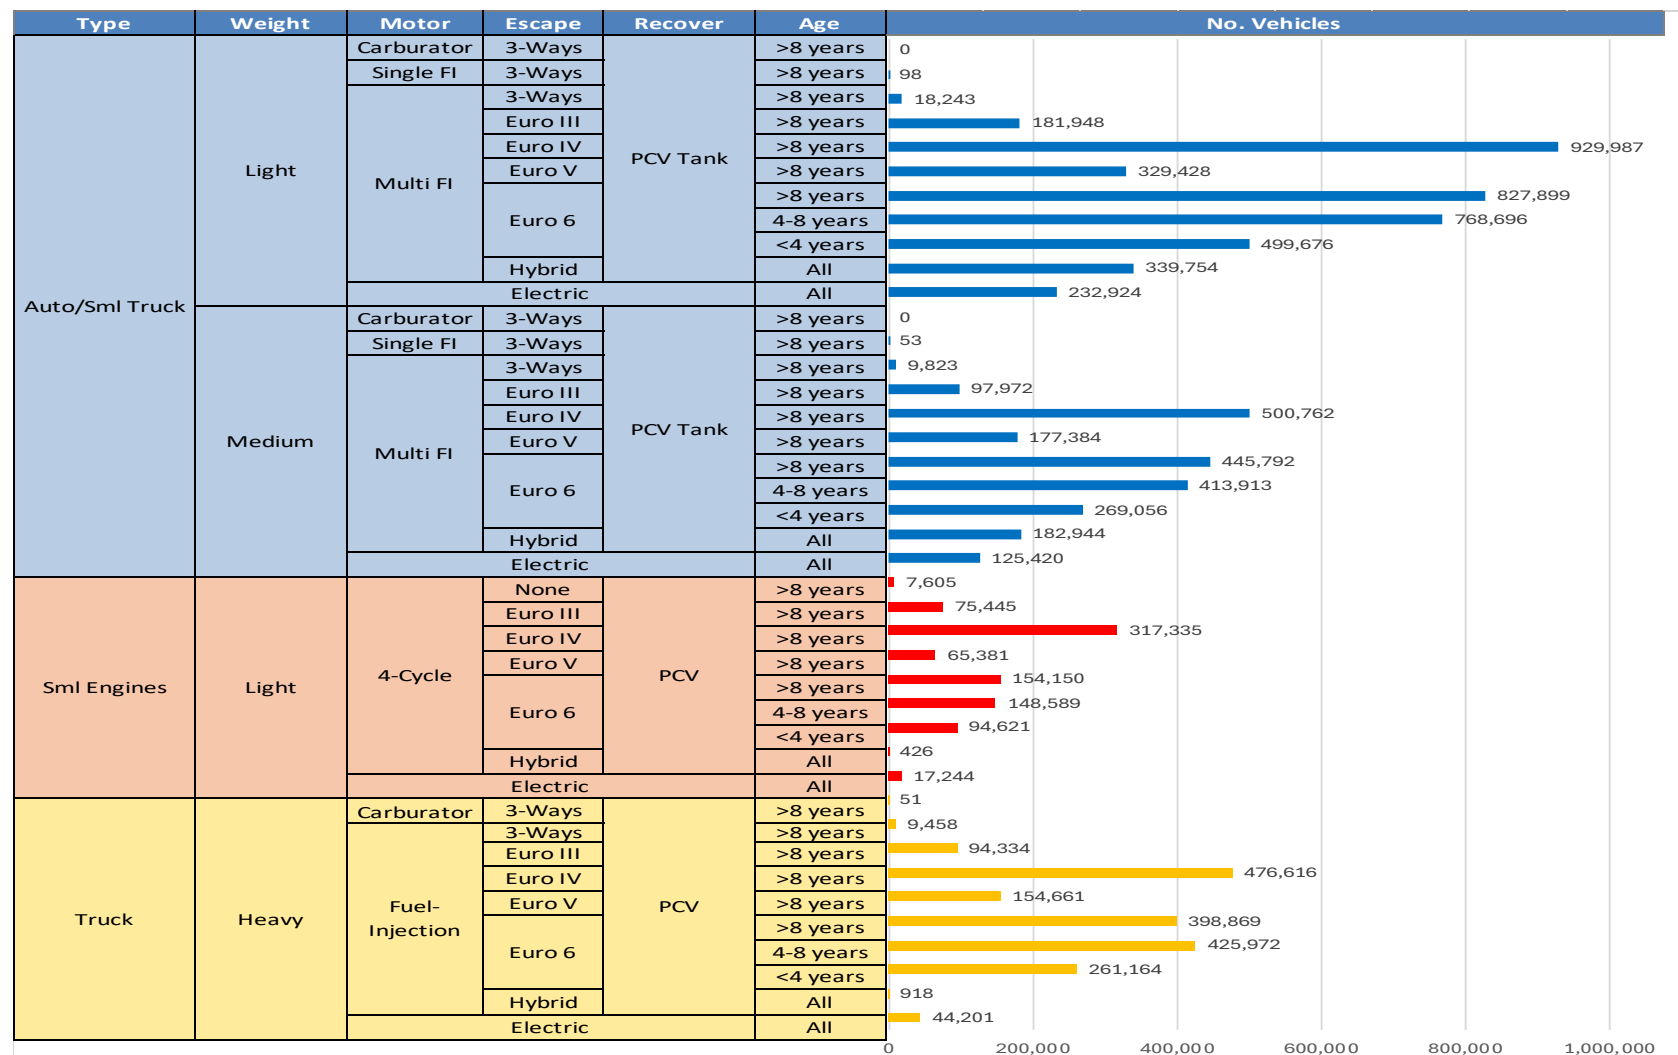


Vehicle Fleet: 9,098,811
Gasoline Vehicle Fleet: 3,553,018

Source: Eurostat, ACEA

Sweden – Vehicular Emissions



TIER III BIN 125 United States
Euro 6 Standard

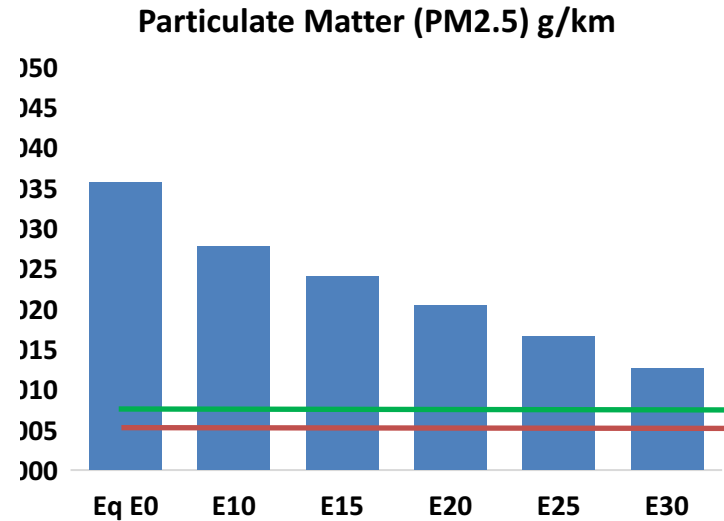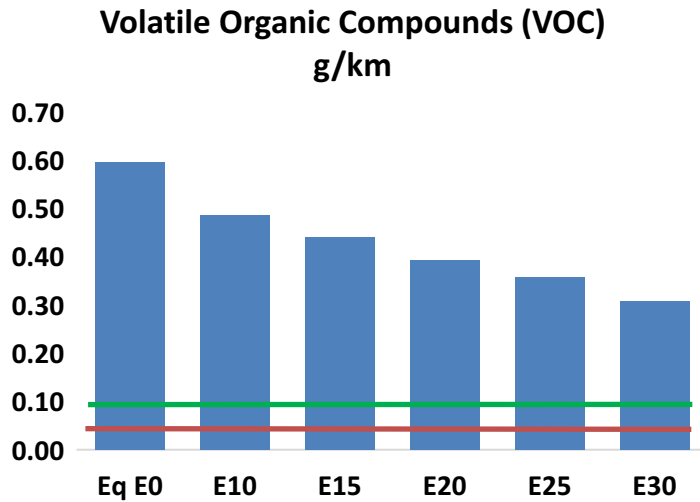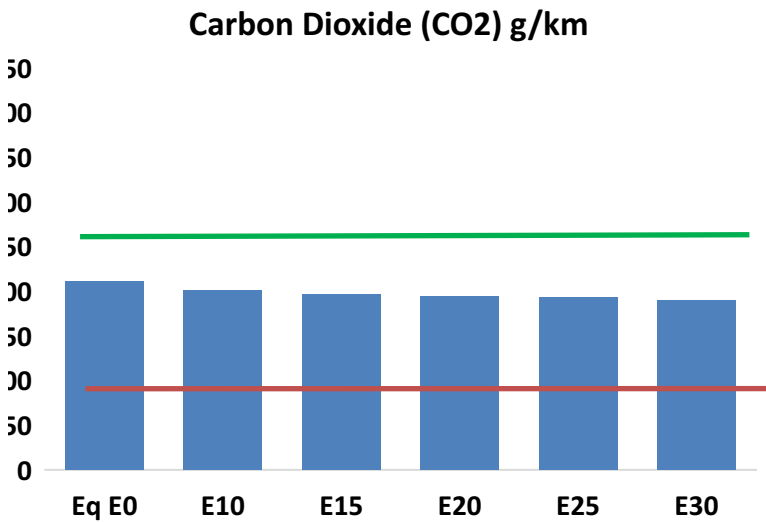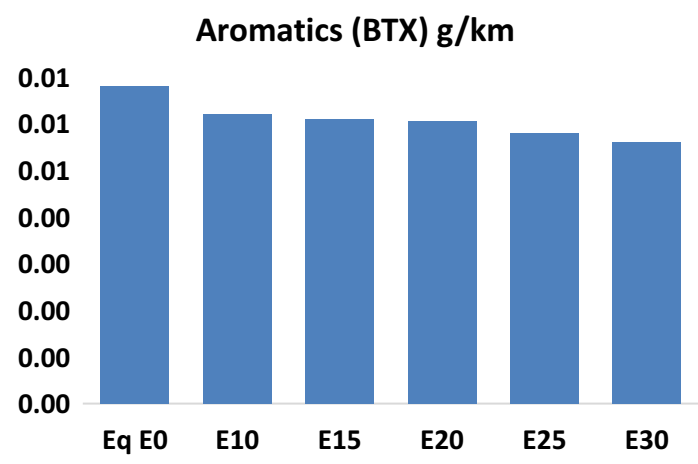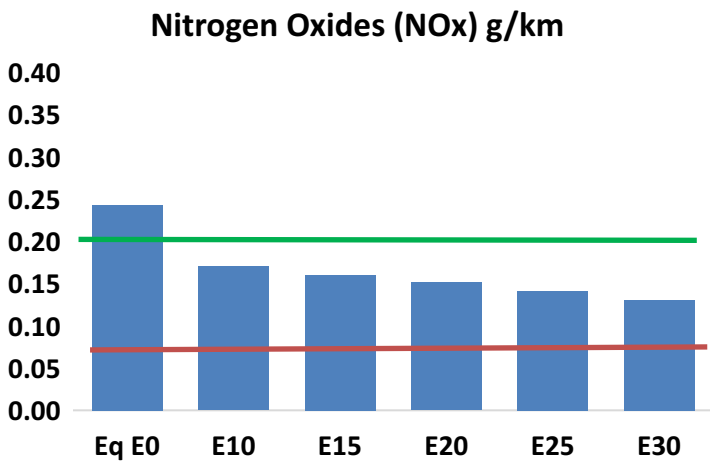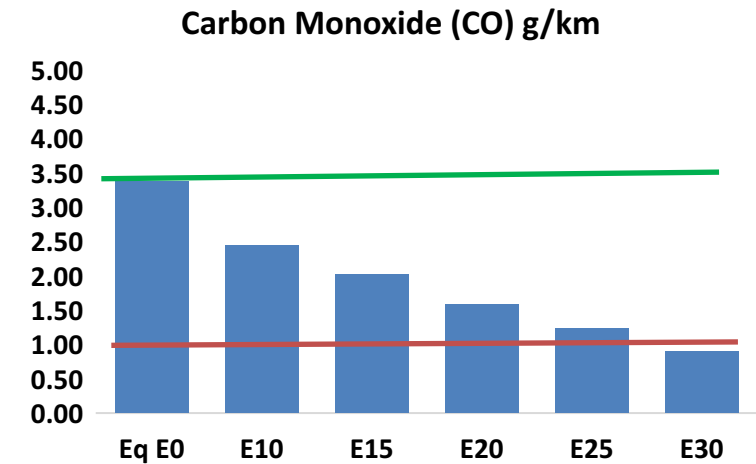

Sweden – Vehicular Emissions

Vehicular Fleet Emissions (kg/day)	Eq E0	E5	E10	E15	E20	E25	E30	Reduction (%)	
								E10	E20
CO	294,225	253,630	213,035	176,261	137,640	107,455	77,868	-28%	-53%
CO2	18,387,085	17,914,274	17,467,730	17,116,537	16,942,753	16,846,077	16,535,555	-5%	-8%
VOC	51,886	47,146	42,405	38,374	34,251	31,059	26,872	-18%	-34%
NOx	21,156	15,867	14,809	13,958	13,163	12,288	11,361	-30%	-38%
SOx	212	196	180	166	153	139	124	-15%	-28%
NH3	6,619	6,553	6,488	6,519	6,592	6,644	6,686	-2%	0%
N2O	309	308	306	308	314	318	321	-1%	2%
CH4	10,736	10,736	10,736	10,897	11,133	11,337	11,530	0%	4%
Lead	-	-	-	-	-	-	-	0%	0%
Butadiene	261	242	224	210	195	184	169	-14%	-25%
Acetaldehyde	795	913	1,339	2,039	2,778	3,175	3,751	68%	249%
Formaldehyde	3,016	2,932	3,418	4,013	4,204	4,651	5,063	13%	39%
Benzene	594	570	541	532	528	505	488	-9%	-11%
PM2.5	1,127	1,001	874	759	645	523	397	-22%	-43%
PM10	1,979	1,757	1,535	1,333	1,132	919	696	-22%	-43%

Sweden – Gasoline Vehicle Fleet Life Cycle GHG Emissions

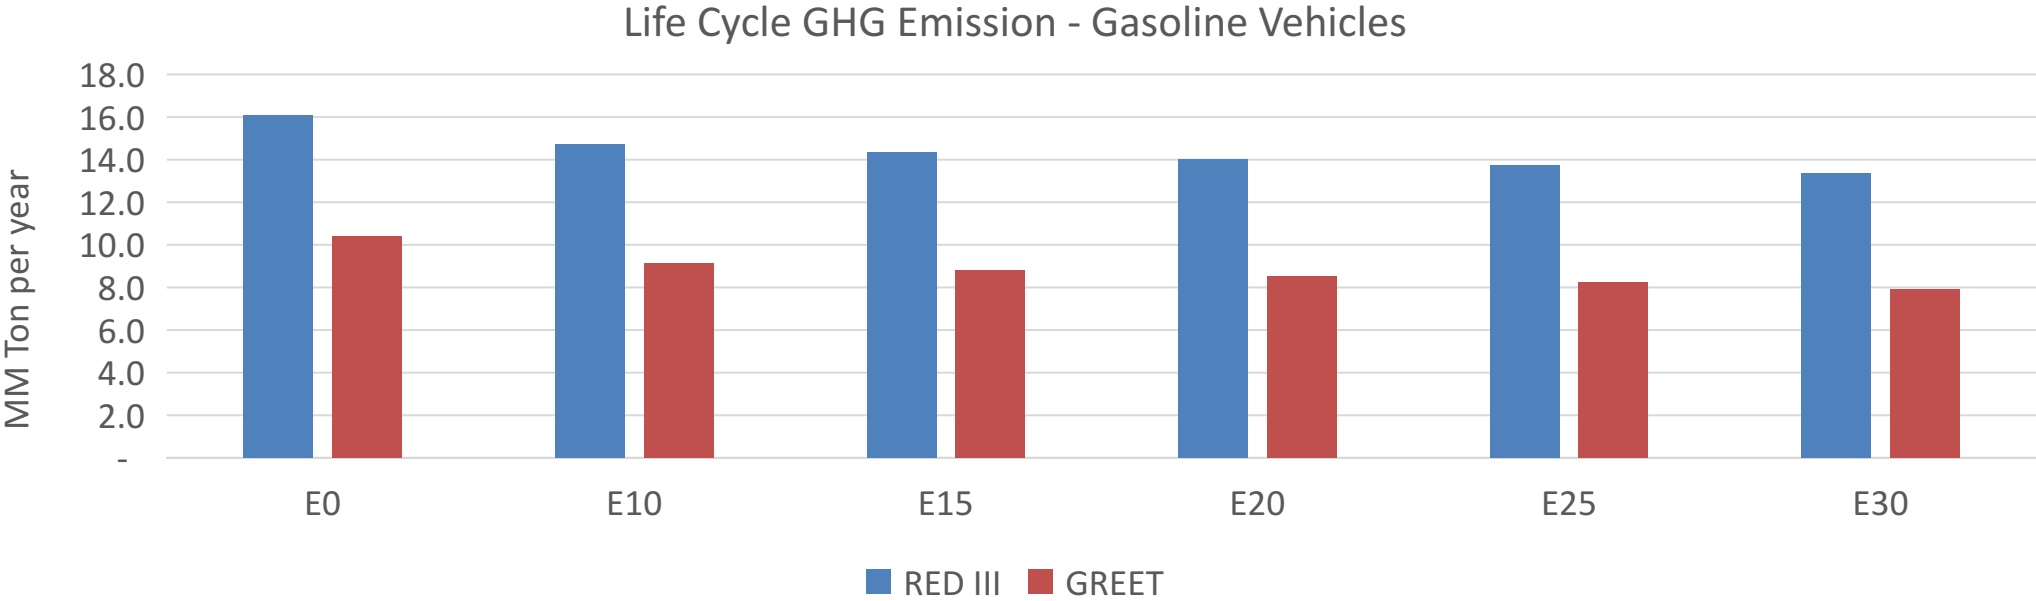

Country Emissions 2024 (MMT/año)	35.9
Target @ 2035 (MMT/year)	20.2
Delta	15.7

%Reduction vs E0	E0	E10	E15	E20	E25	E30
GREET 2024	0.0%	12.2%	15.5%	18.2%	20.8%	24.2%
RED II/III	0.0%	8.5%	10.9%	12.9%	14.8%	17.1%

% Target@2035	E0	E10	E15	E20	E25	E30
GREET 2024	0.0%	8.1%	10.3%	12.1%	13.7%	16.0%
RED II/III	0.0%	8.7%	11.2%	13.2%	15.1%	17.6%

Source: Greet, RED II/III, IPCC, climateactiontracker.org, F90