

Ethanol Blending in Gasoline – Latvia


September 2025



**U.S. GRAINS &
BIOPRODUCTS
COUNCIL**

20 F St. NW, Suite 900 \ Washington, DC 20001
202-789-0789 \ www.grains.org

FARO90




www.faro90.com
+52 55 6122 2255

Ethanol Blending in Europe


There are important fuel quality and environmental impact of vehicle emission challenges in the Region.

- The use of ethanol improves gasoline quality and creates flexibility in gasoline production.
- Ethanol use is a cost-effective way to increase gasoline octane and to replace more expensive gasoline components.
- Ethanol contributes to transport decarbonization and air quality improvement.
- There are opportunities across Europe to increase the ethanol blend level and implement new policies on the use of gasoline-ethanol blends.

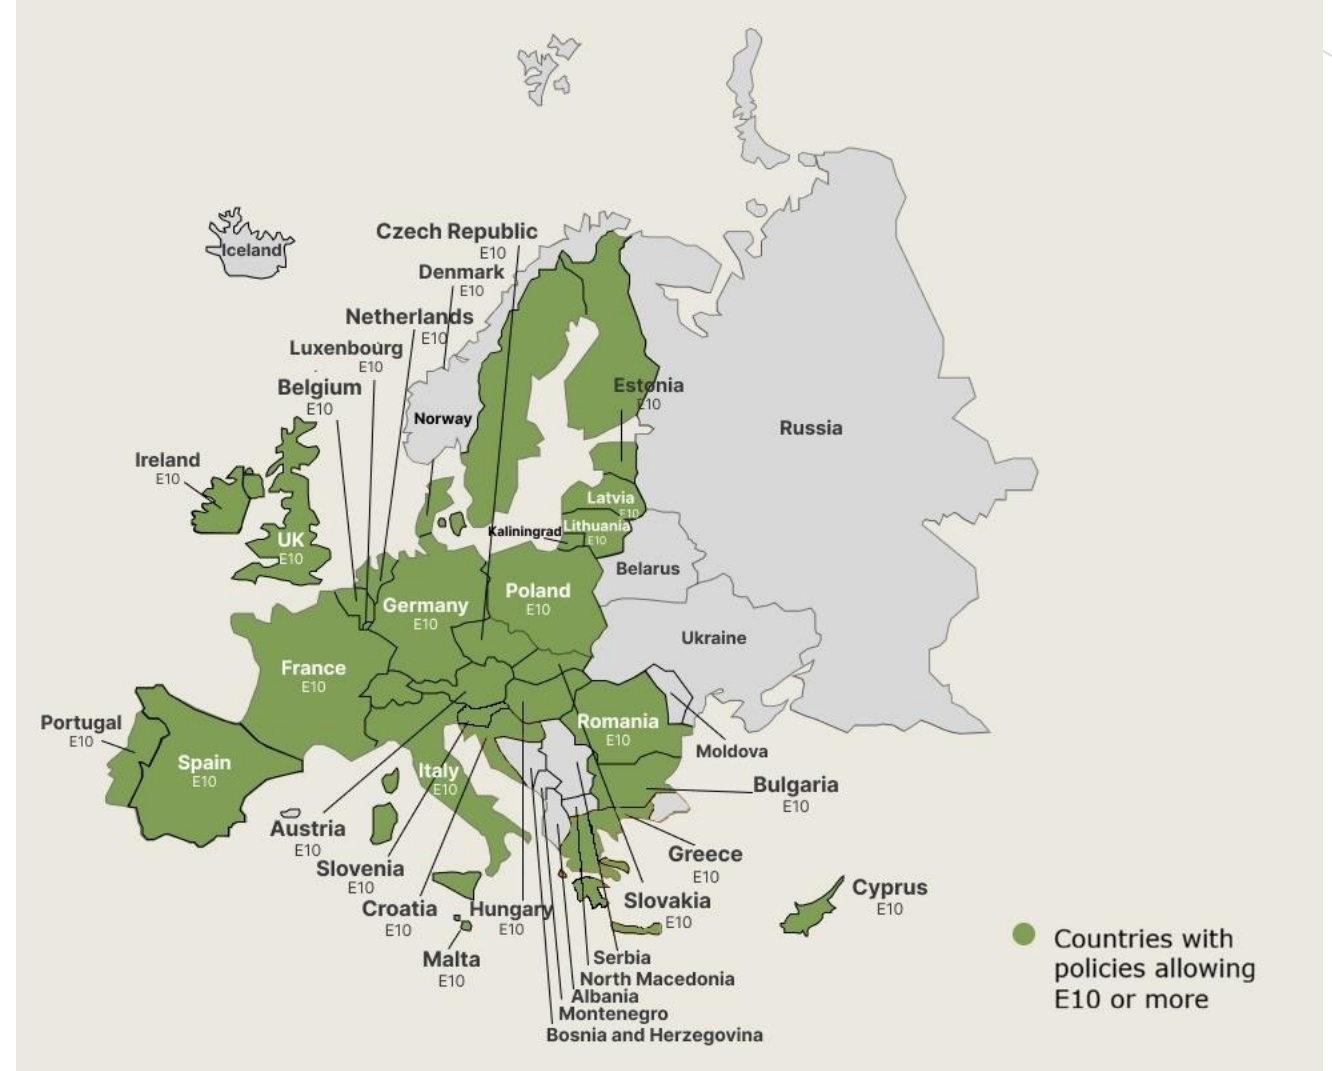

Twenty eight countries with potential and additional use of ethanol were studied: 1) Gasoline market profiles; 2) Optimization of gasoline blends with ethanol and, 3) Environmental impact of gasolines blended with ethanol.

Ethanol Gasoline Blending in Latvia

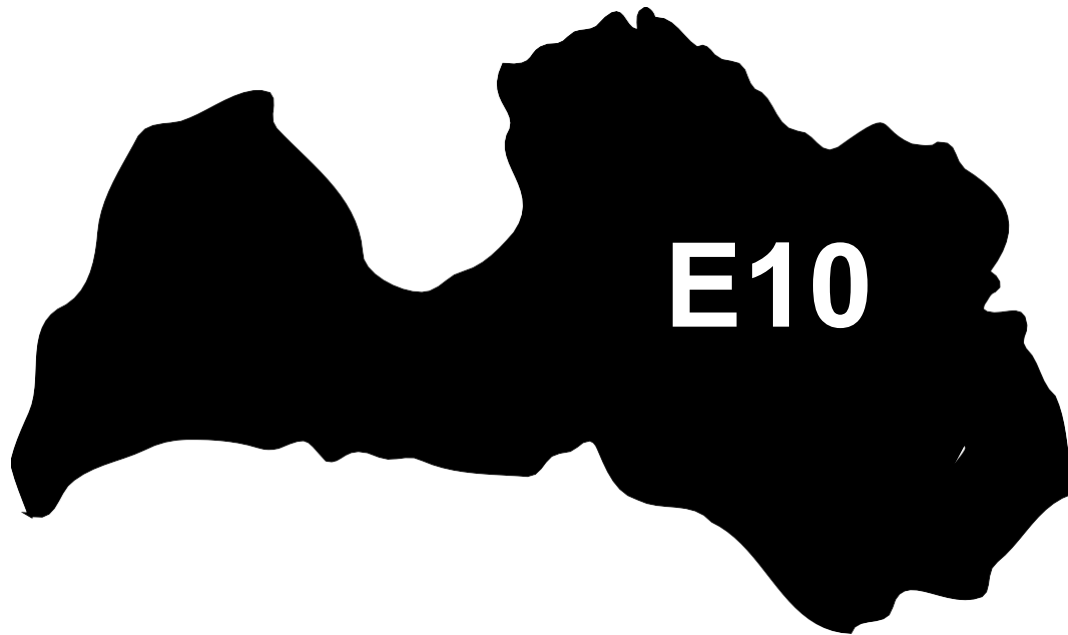


In 2024, gasoline consumption in Latvia was 220 million liters (58 million gallons) and growth rate was -1.1%. There is no gasoline production. Gasoline net imports were 200 million liters (53 million gallons). Latvia complies with the European gasoline standards and offers two main grades: RON 95 and RON 98 with an average octane of 95.4 RON.

In 2024, ethanol consumption in Latvia was 23 million liters (6 million gallons) representing 10.4% of gasoline demand. Ethanol production and Net Imports were 25 and -3 million liters (6 and -1 million gallons) correspondingly. Ethanol source Cereals 100%.


Source: Eurostat, European Commission

Gasoline Demand in Latvia

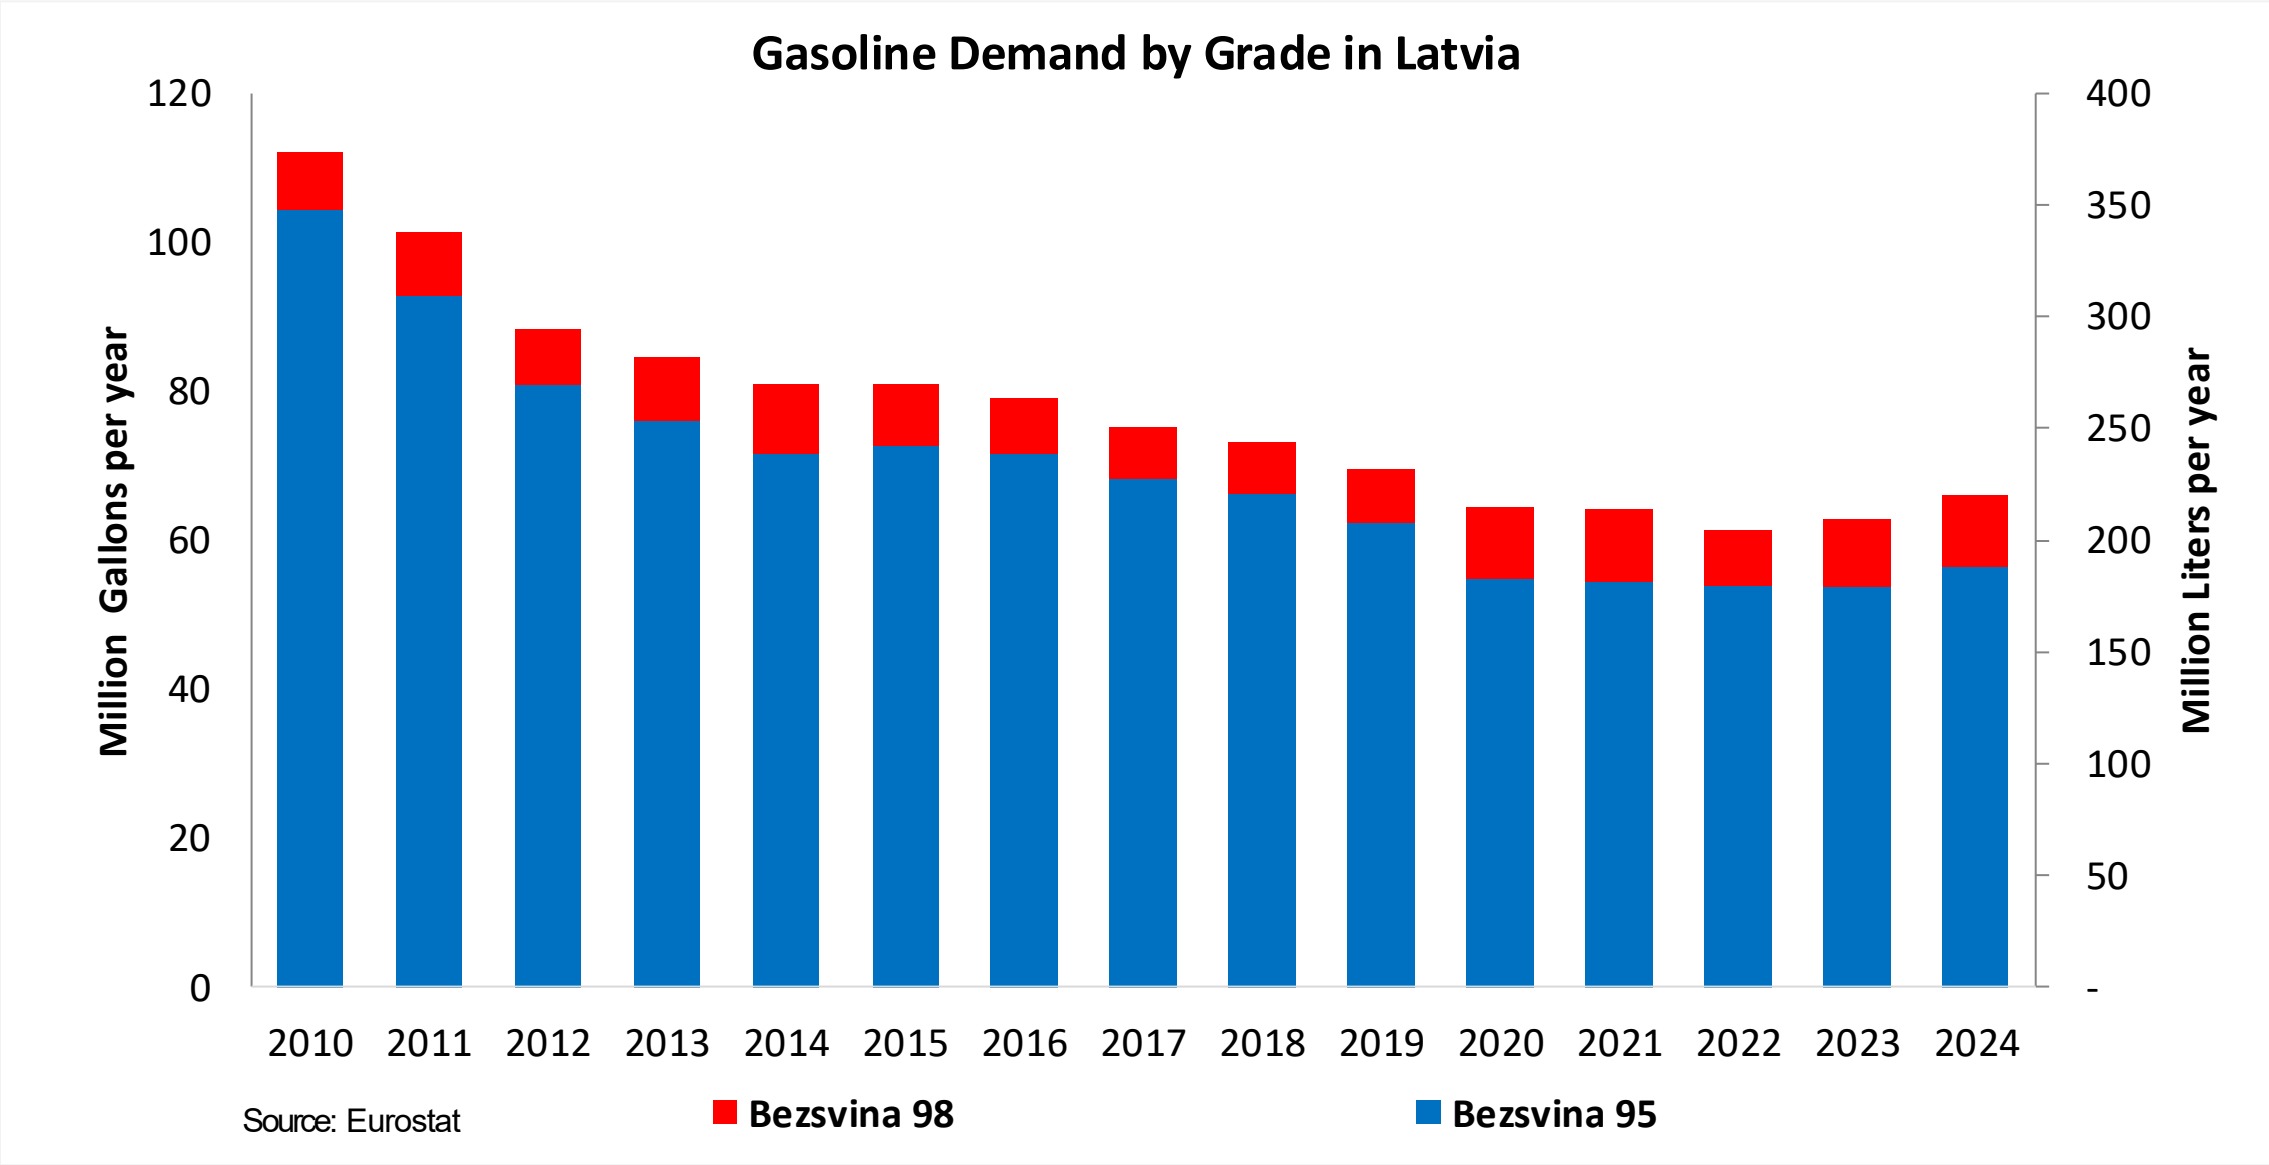


Gasoline Imports in Latvia

Gasoline imports by Grade in Latvia

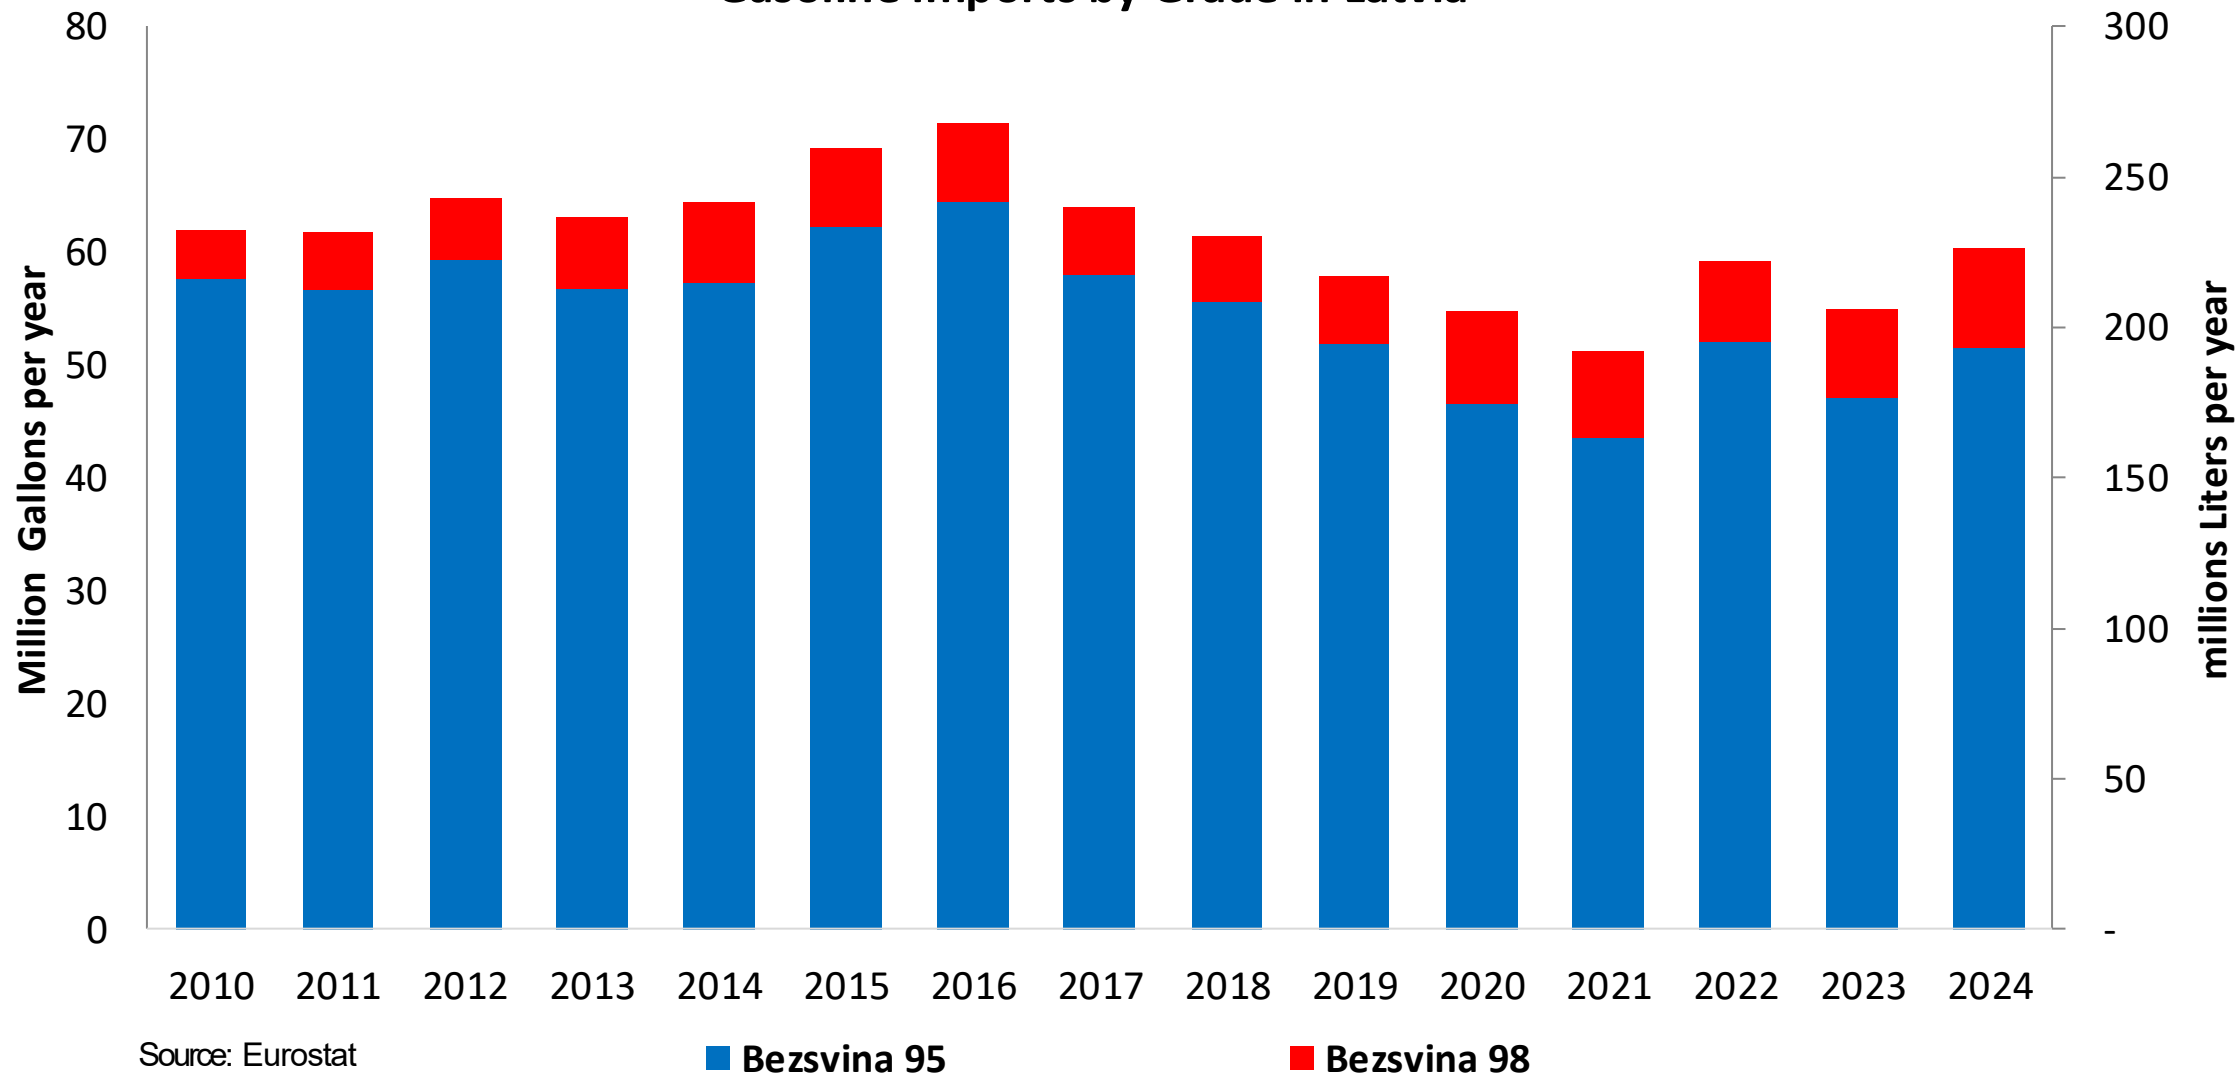


Source: Eurostat

Gasoline Exports in Latvia

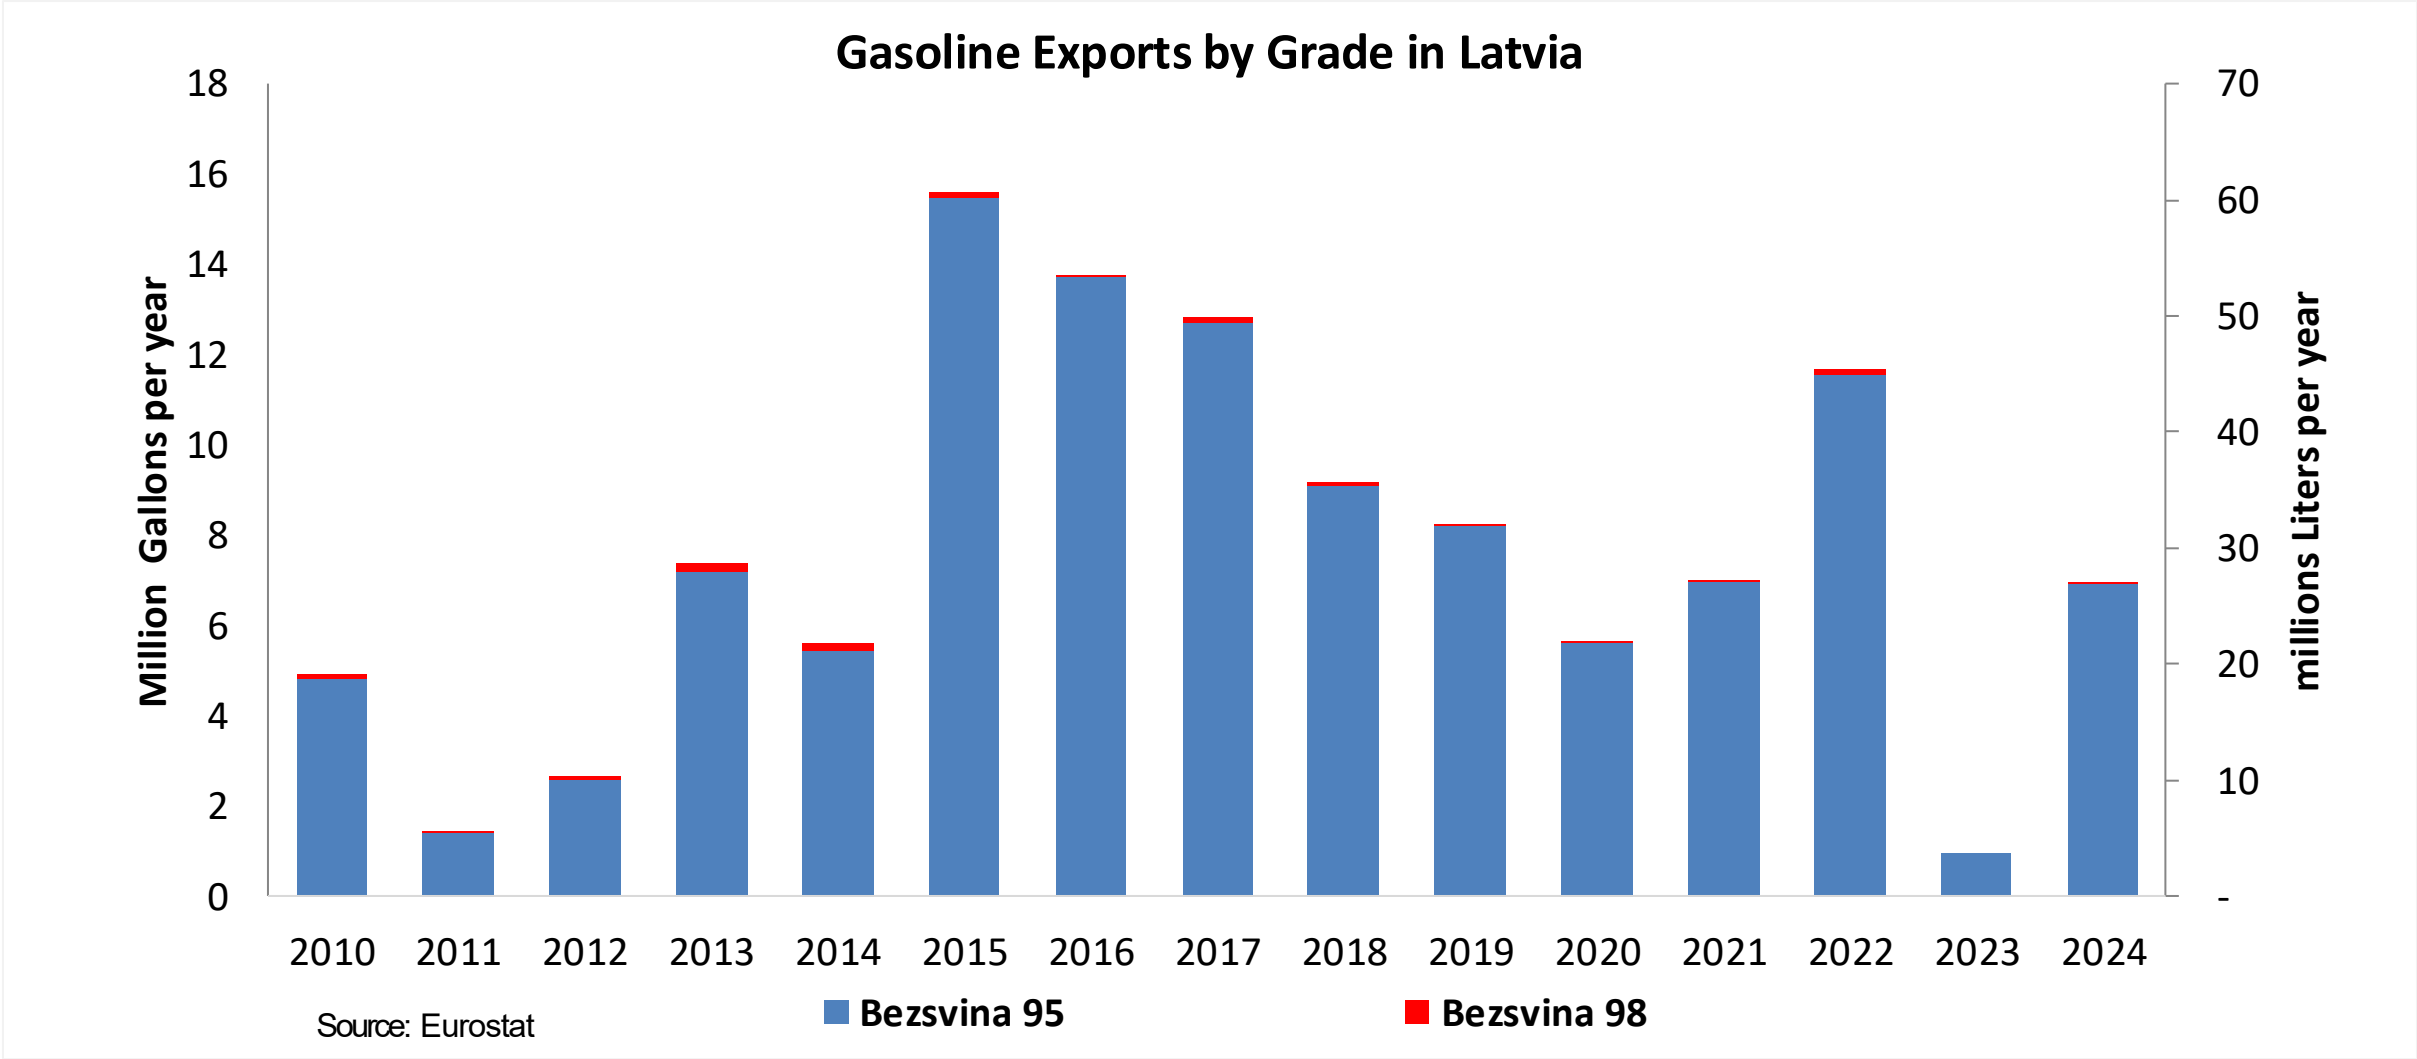


Ethanol Balance in Latvia

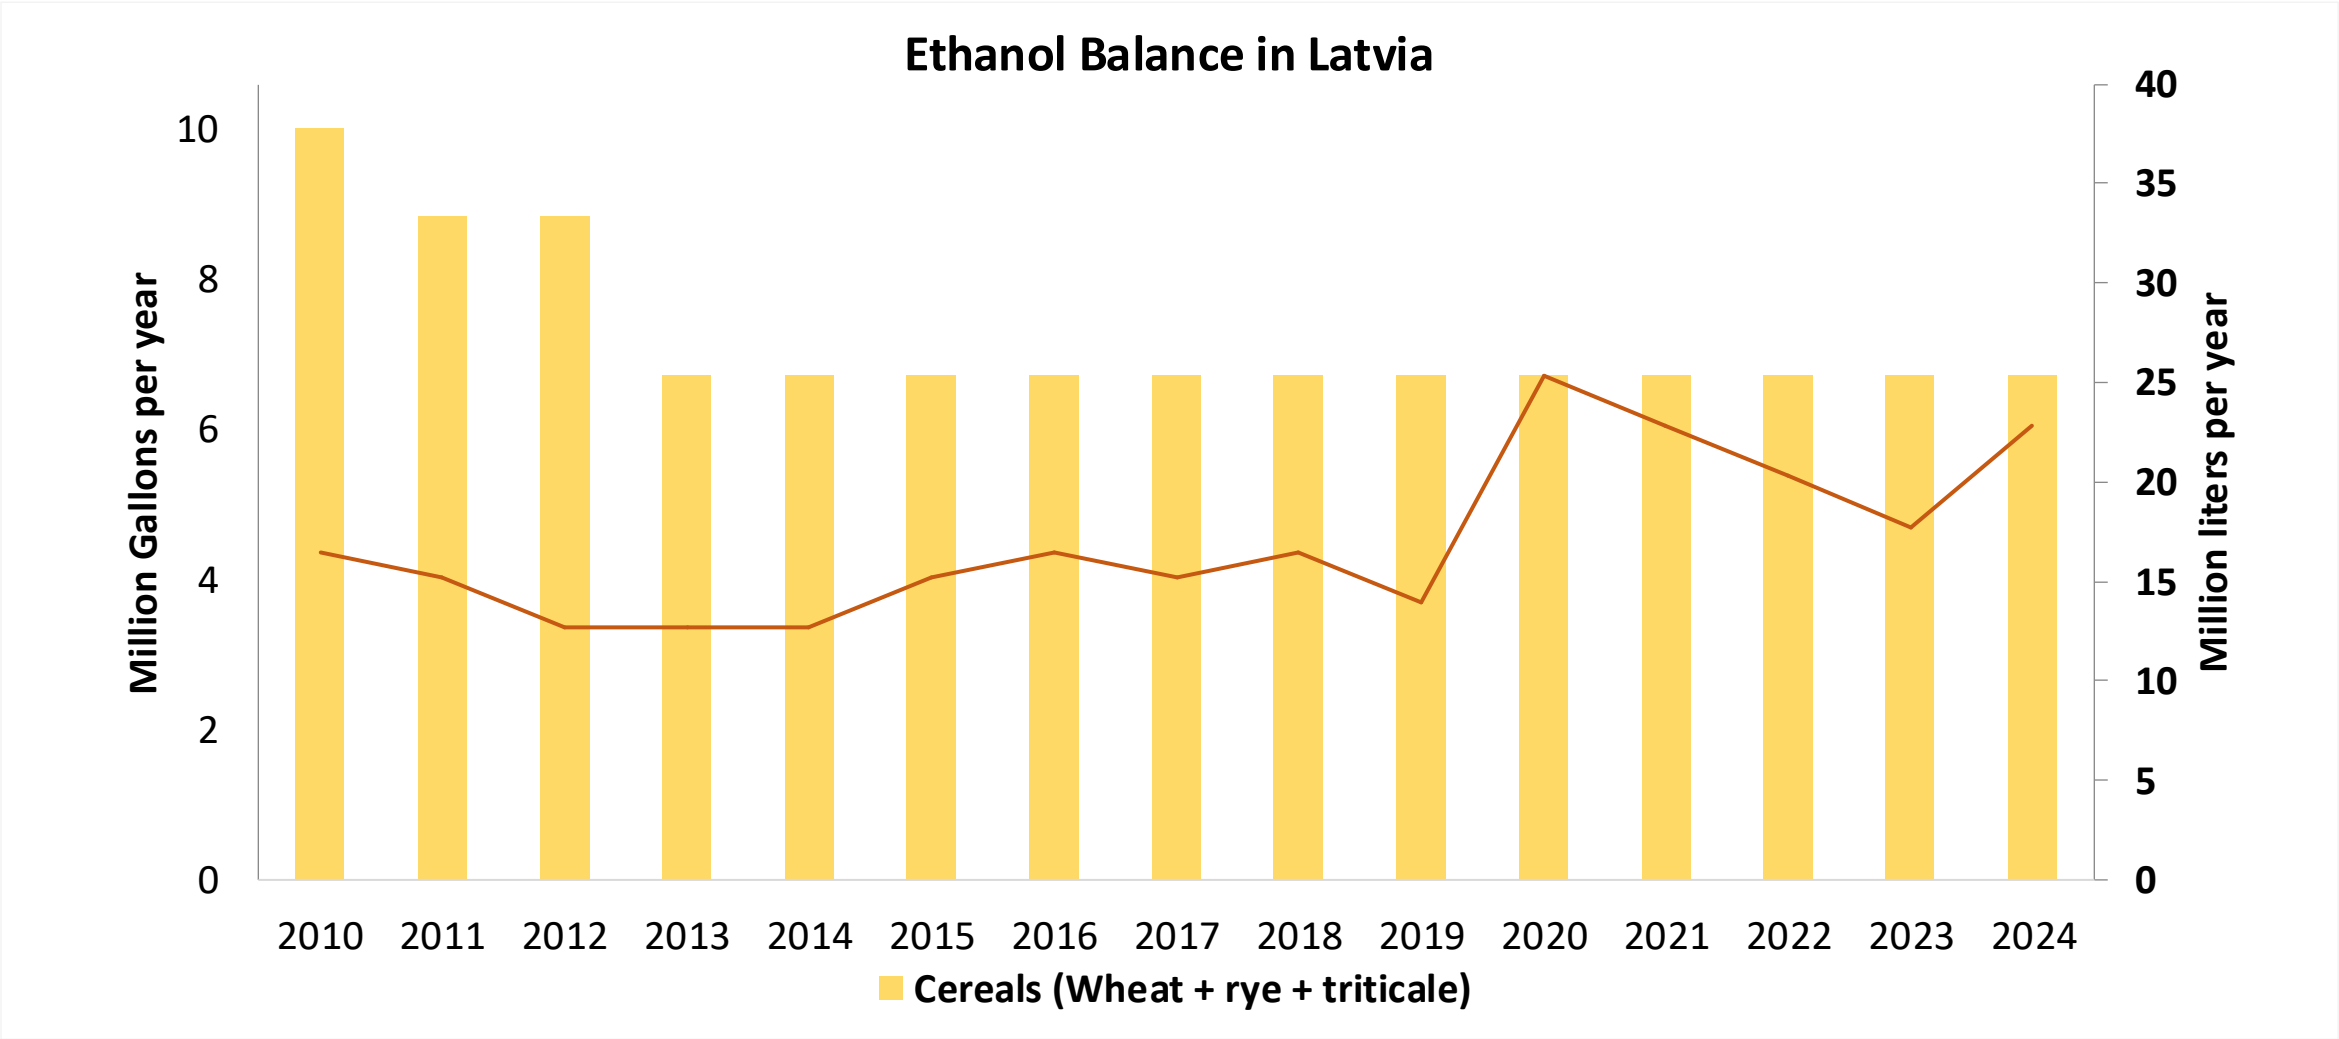

Source: Eurostat, Latvia Statistics

Gasoline Quality in Latvia




Name	EN 228:2025 (Euro 6); Country Level Fuel Ordinances							
Implementation Date	2025							
Applicability	All EU Contries + UK							
Grade	RON 95 E5		RON 95 E10		RON 98 E5		RON 98 E10	
	Min	Max	Min	Max	Min	Max	Min	Max
RON	95.0		95.0		98.0		98.0	
MON	> 85	> 88	> 85	> 88	> 85	> 88	> 85	> 88
AKI								
Benzene (%vol)	< 1							
Aromatics (% vol)	< 35							
Olefins (%vol)	< 18							
Lead (g/L)	< 0.005							
Manganese (mg/L)	< 2,0							
Sulfur (ppm)	10.0							
Oxygen (%w)*	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7
Ethanol (%vol)	< 5	< 10	< 5	< 10	< 5	< 10	< 5	< 10
PVR 37.8°C (psi)	<> 45 - 100 kPa in 6 Volatility Classes							
Overall Biofuels (%cal)	-							
Advanced Biofuels (%cal)	0.2							
Bioethanol in Gasoline Sales (%cal)	-							
GHG Emission Reduction (%)	-							

* Methanol 3%, Iso-propyl alcohol 12%, Ter-butyl alcohol 15%, Iso-butyl alcohol 15%, Ethers +5 Carbons 22%, Other Oxygenates 15%

Source: European Commision

The FARO90 logo is shown in a blue box, followed by a chemical structure of a substituted cyclohexadiene. The structure features a six-membered ring with two double bonds. Substituents include a hydrogen atom (H), a carbon atom (C), and a group labeled 'X' (which is a vinyl group, -CH=CH₂). The ring is also substituted with an ethyl group (-CH₂CH₃) and a methyl group (-CH₃).

0% 10% 20% 30% 40% 50% 60% 70% 80% 90% 100%

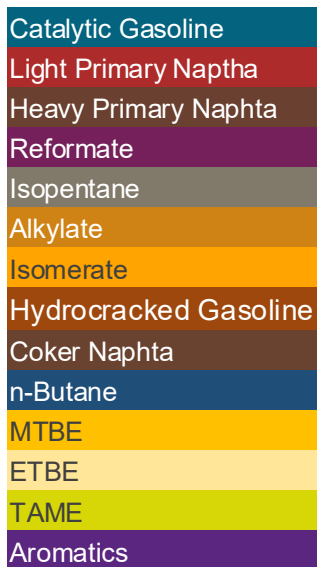

Source: Faro90


Gasoline Blending Optimization

In some parts of the world, ethanol is added to gasoline as a blending component. The advantages of ethanol include that it is a renewable fuel made of biomass; that it is an octane booster that helps to dilute sulfur; and that it allows the fulfillment of environmental objectives. To determine the optimal components to be blended with ethanol, a **blending model** was used. This model selects the components to add in the gasoline/ethanol blend based on:



- Components prices,
- Properties each component affects,
- Quality parameters by country, and
- Component availability by country.

Through iterations, the model obtains the %v/v of the components to be blended with 10%, 15%, 20%, 25% and 30% of ethanol, in such a way that the final blend complies with the required properties of a finished gasoline by country.


The blending model uses gasoline component spot average prices 2024 and provides fuel prices that do not include country distribution costs, local taxes and subsidies and import or gas station margins.

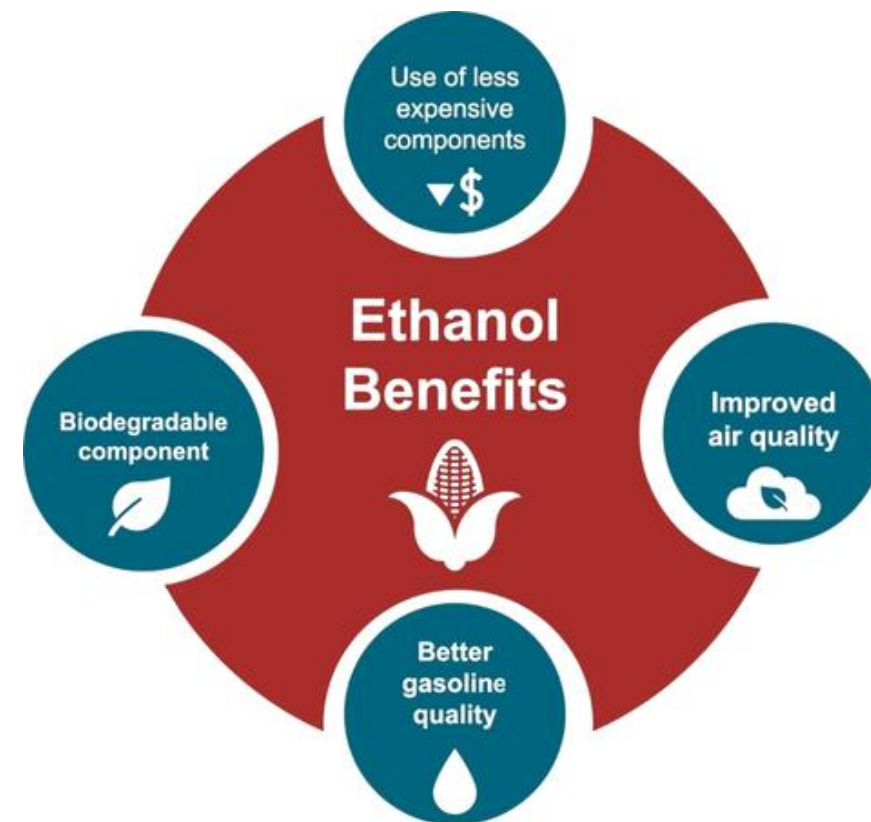

Latvia Available Blending Components

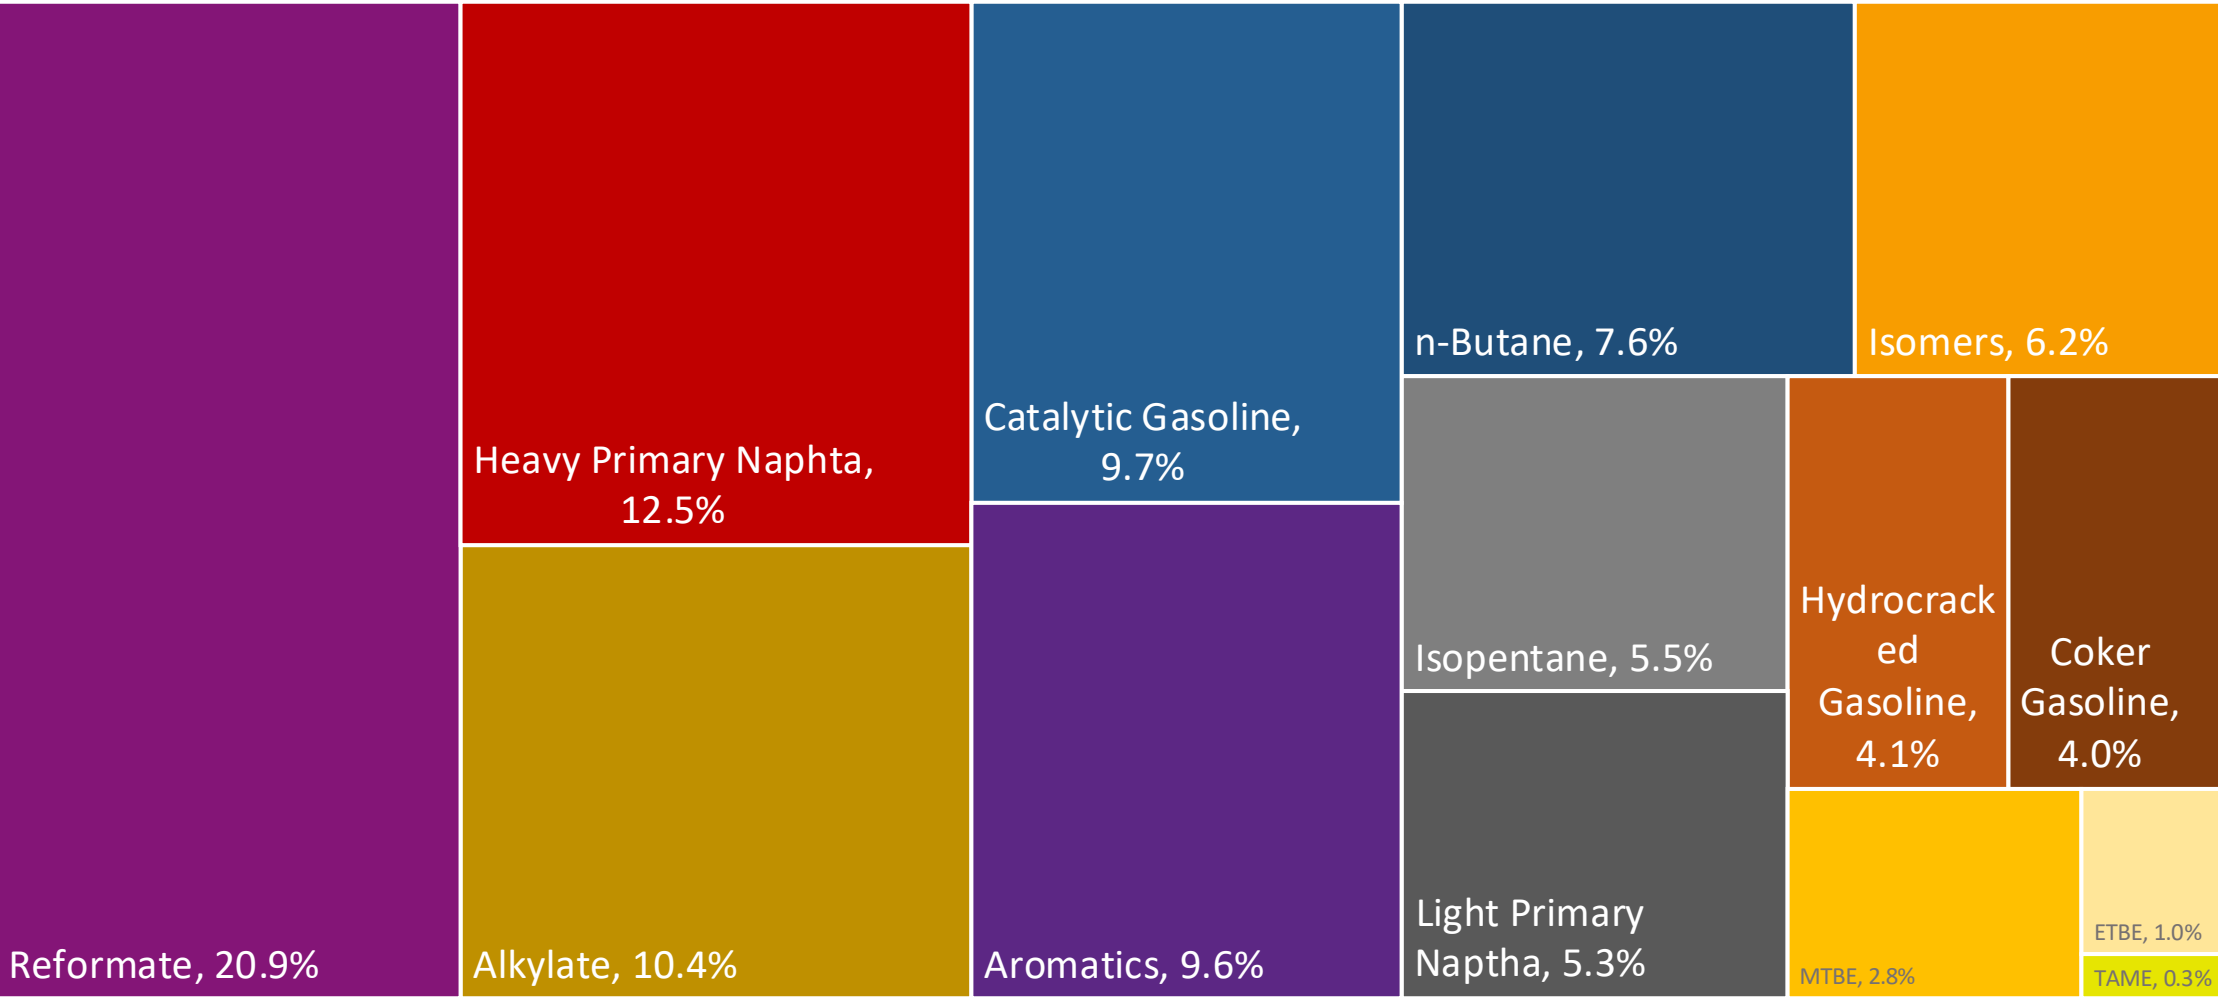


Latvia – Gasoline 95 – Constant Octane

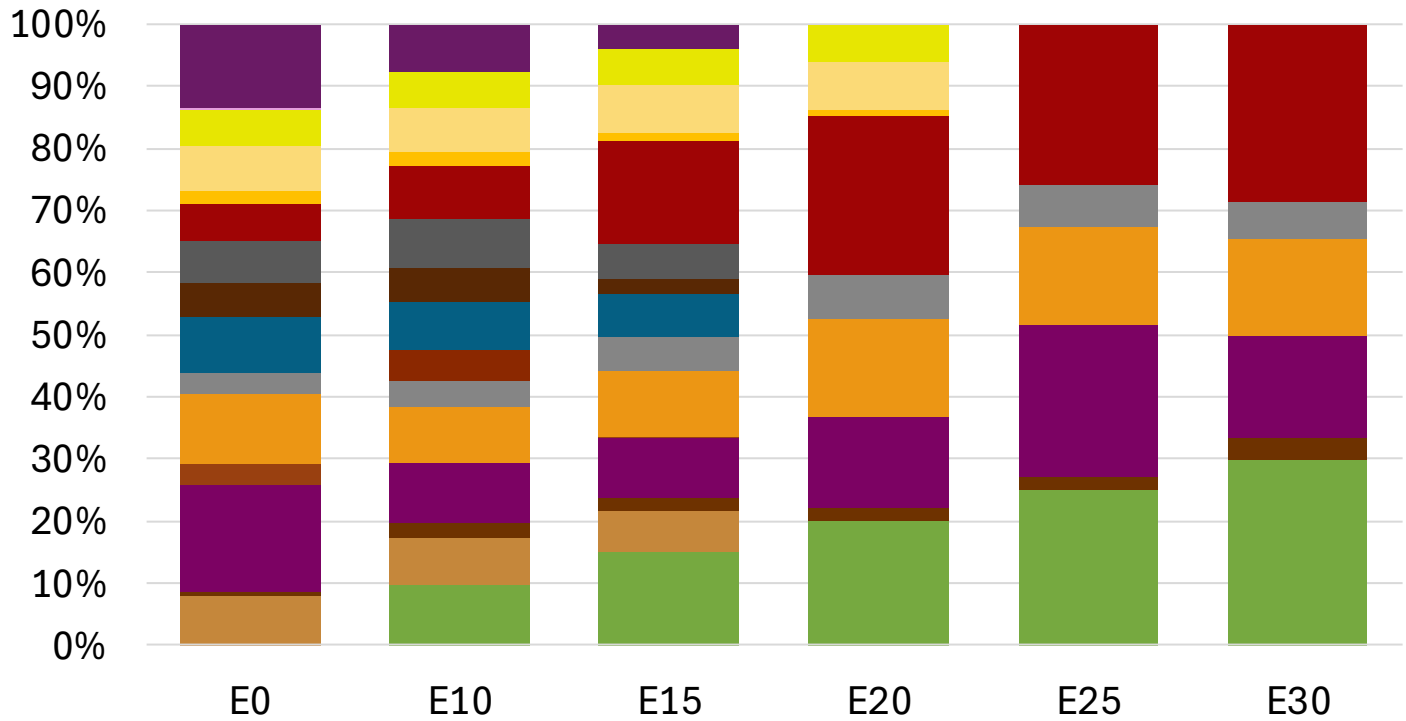

Average CIF 2024
Prices


Latvia - Gasoline 98 - Constant Octane

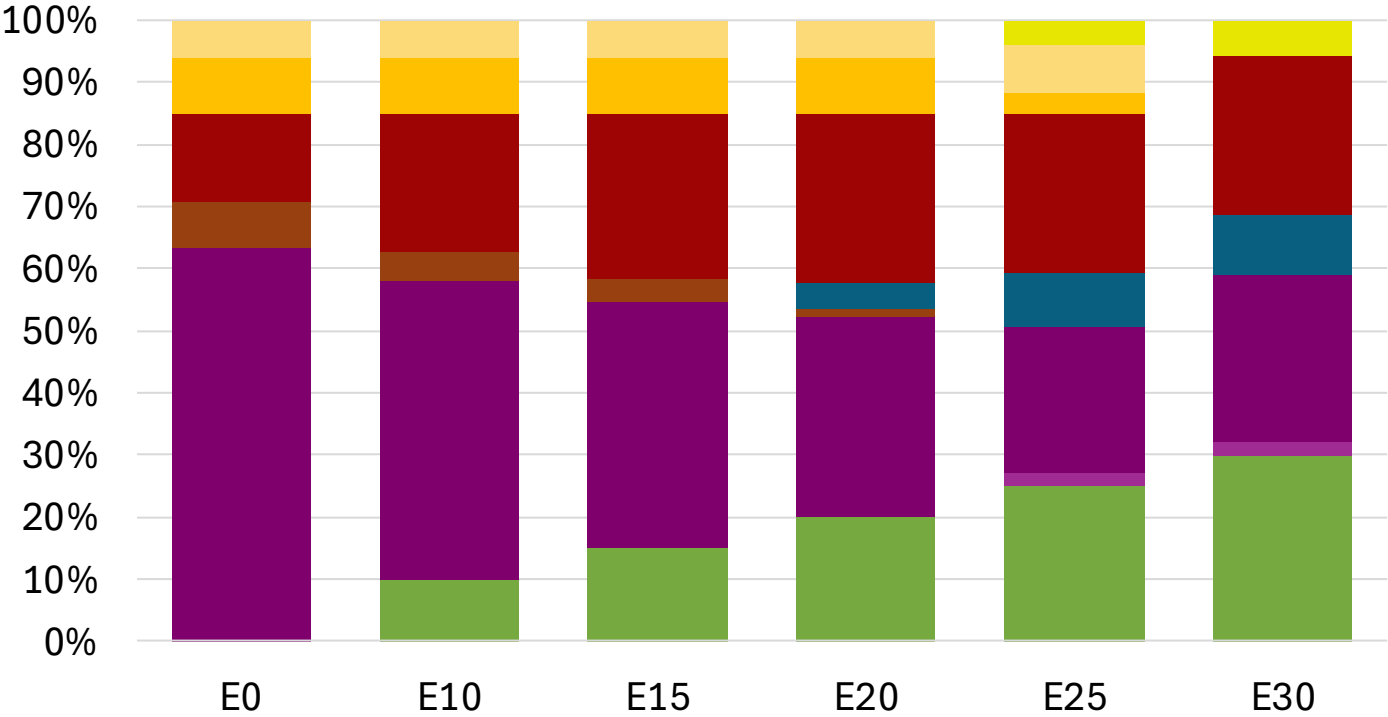

Average CIF 2024
Prices

Octane (RON)	98.0	98.0	98.0	98.0	98.0	98.0
Price (US\$/gal)	\$ 2.294	\$ 2.177	\$ 2.108	\$ 2.036	\$ 1.971	\$ 1.921


Latvia – Gasoline 95 – Increased Octane

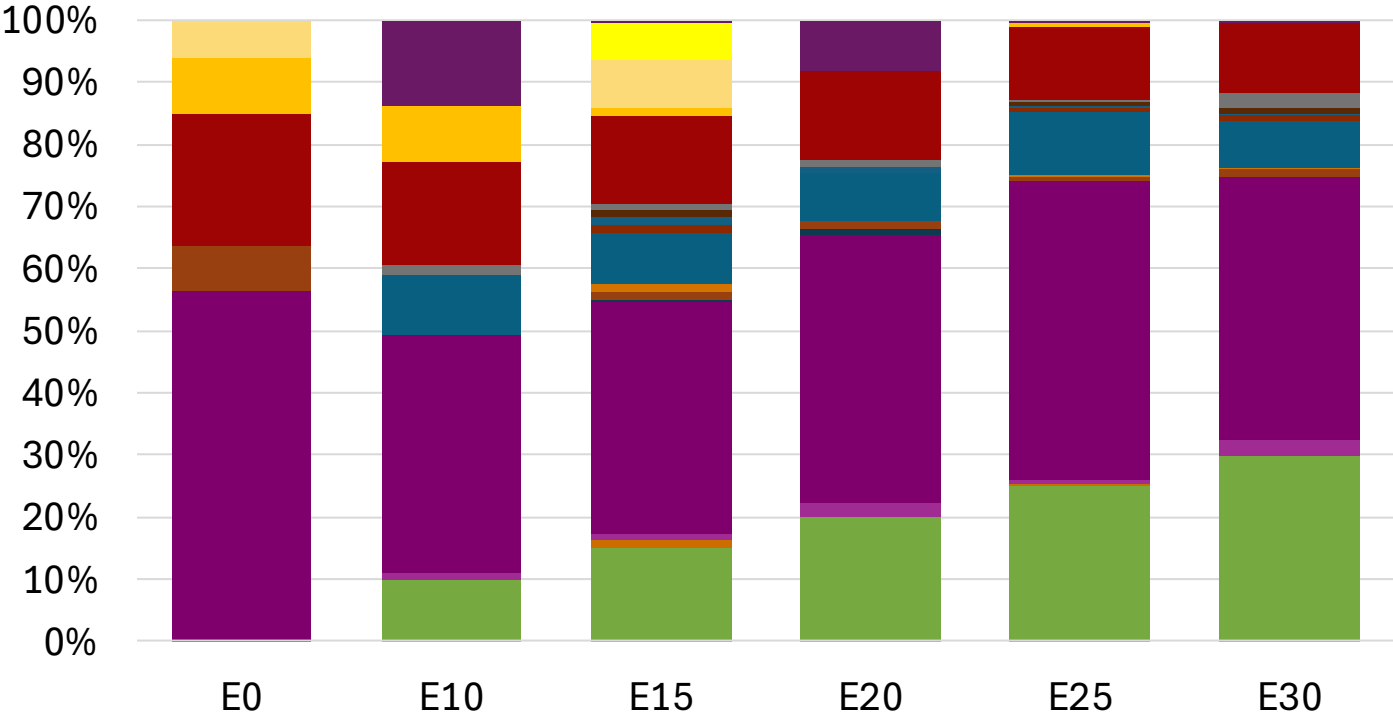

Average CIF 2024
Prices

Octane (RON)	95.0	96.2	98.3	98.7	100.5	101.8
Price (US\$/gal)	\$ 2.162	\$ 2.162	\$ 2.162	\$ 2.162	\$ 2.162	\$ 2.162

Latvia – Gasoline 98 – Increased Octane

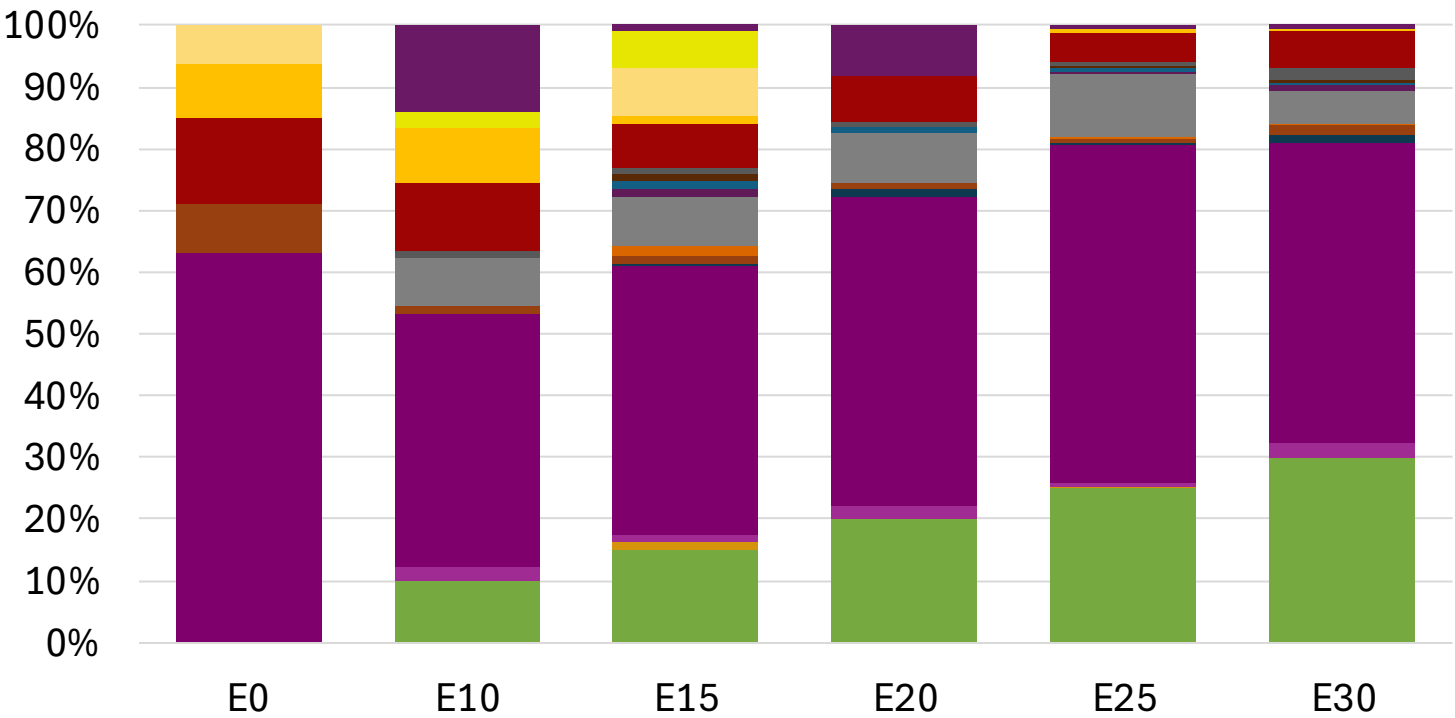

Average CIF 2024
Prices

Octane (RON)	98.0	99.0	100.9	101.2	102.8	104.1
Price (US\$/gal)	\$ 2.294	\$ 2.294	\$ 2.294	\$ 2.294	\$ 2.294	\$ 2.294

Source: Faro90

Vehicle Emission Impact for Ethanol Gasoline Blending

The model used in this analysis takes as a reference the [International Vehicle Emissions Model \(IVE\)](#).


The model uses the Base Emission Rates from IVE model, as well as its Adjustment Factors based on:

- Vehicle technology (cars, trucks, buses, motorcycles),
- Vehicle fleet average age,
- Average traveled distance per vehicle by country, as well as
- Geographical and climatic conditions (altitude, humidity, temperature).

Emissions of criteria pollutants, toxic pollutants, and greenhouse gases (GHG) were calculated and calibrated with emission inventories, using real gasoline quality data. The reduction rates for gasoline/ethanol blends were obtained from various sources (IPCC, US Grains, among others).


Emission estimations for different pollutants for gasoline and gasoline/ethanol blends (10%, 15%, 20%, 25% and 30% ethanol) were determined using the IVE Model. A comparison between the results and the European (Euro 6) requirements is made. Results are also compared with real emissions of the United States vehicle fleet*.

Main Results

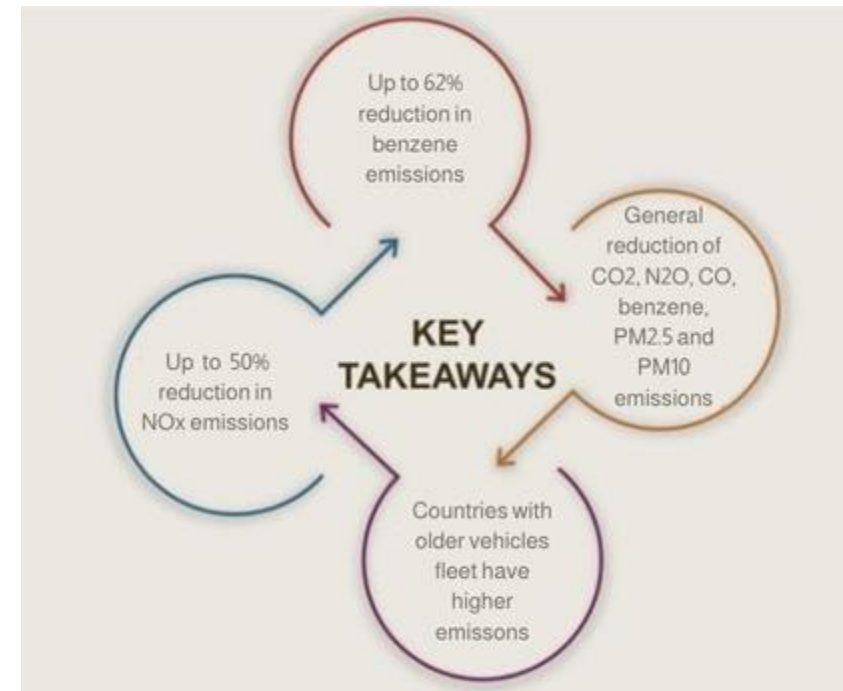

*Source: Bureau of transportation statistics.

Gasoline Vehicle Fleet - Latvia







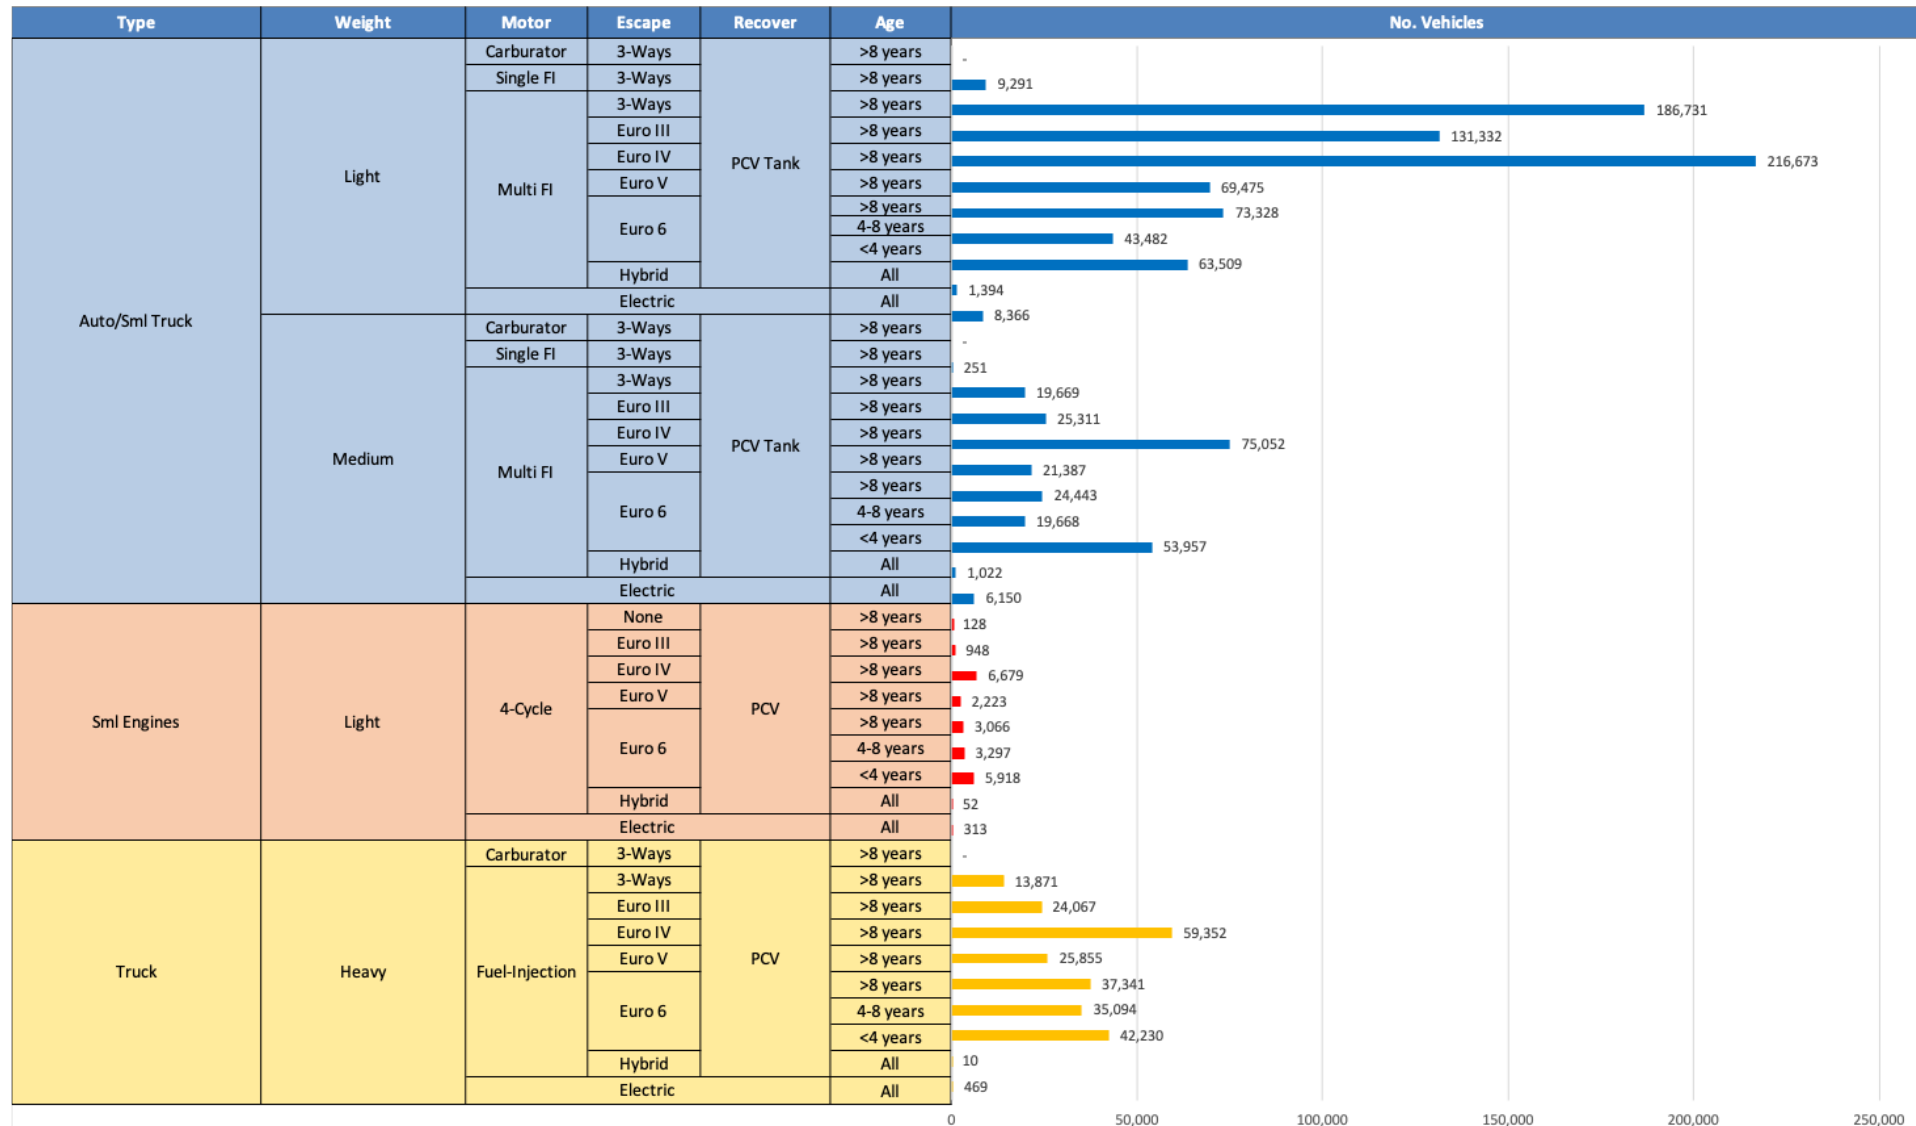


Vehicle Fleet: 1,311,403
Gasoline Vehicle Fleet: 333,918

Source: Eurostat, ACEA

Latvia – Vehicular Emissions

TIER III BIN 125 United States
Euro 6 Standard

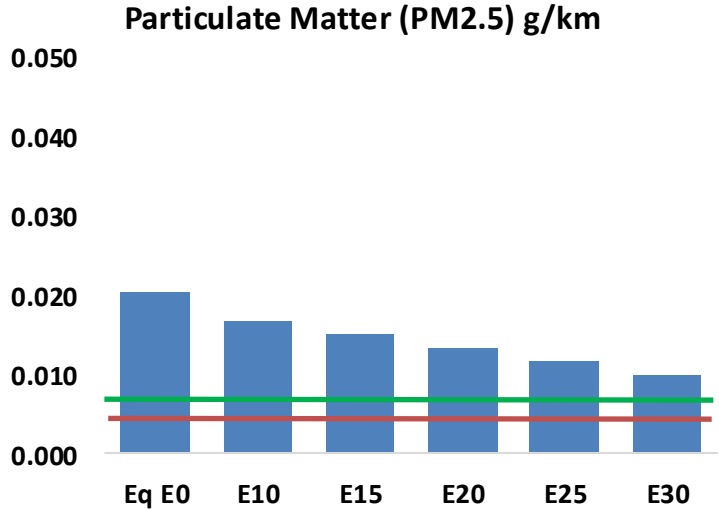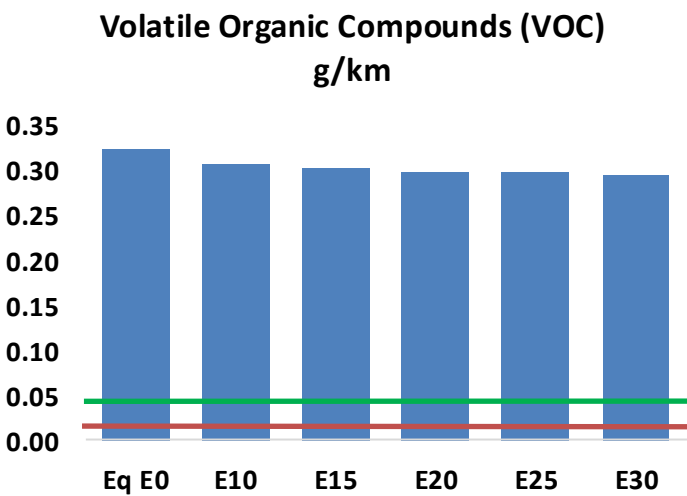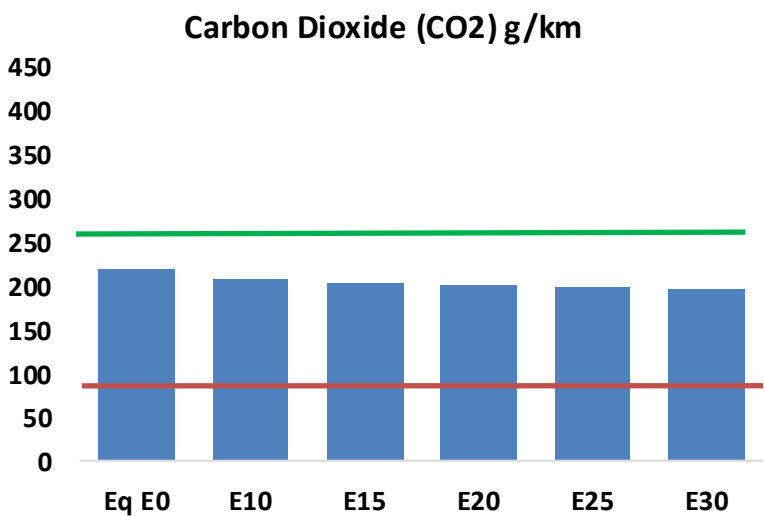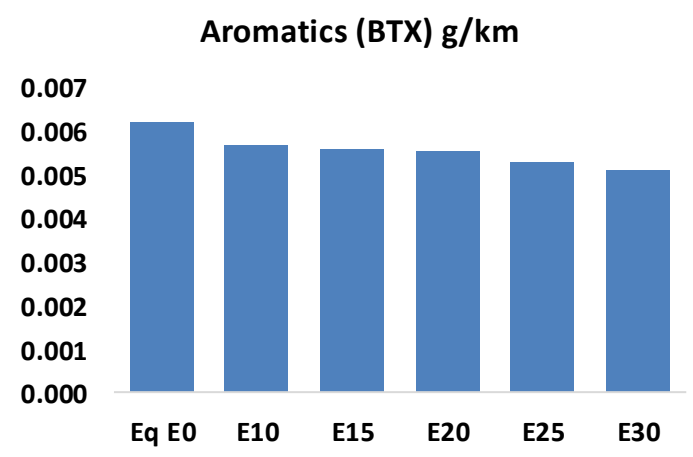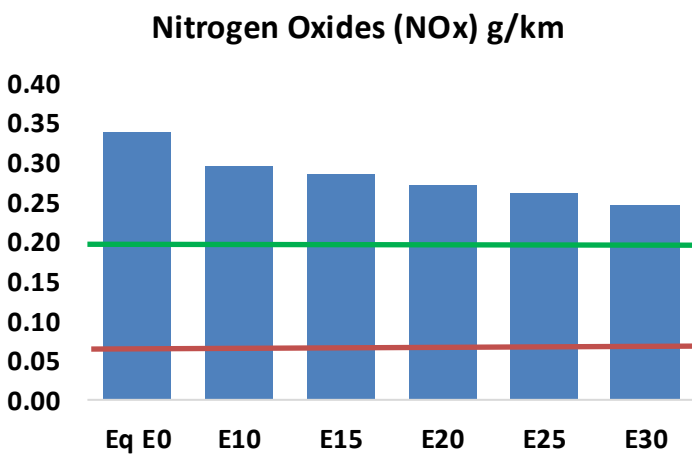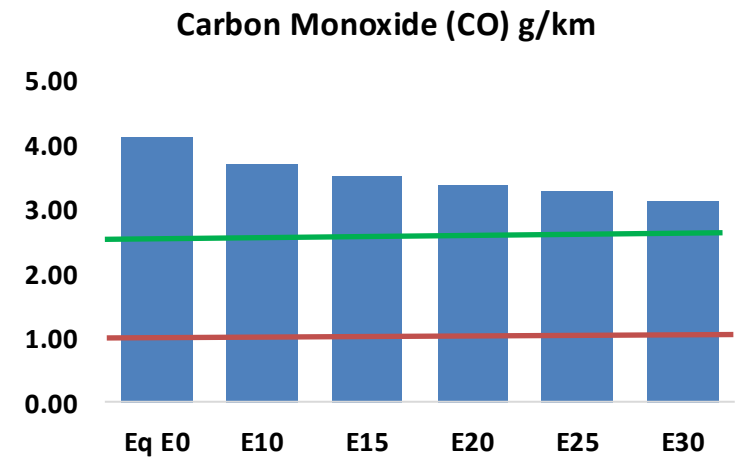

Latvia – Vehicular Emissions

Vehicular Fleet Emissions (kg/day)	Eq E0	E5	E10	E15	E20	E25	E30	Reduction (%)	
								E10	E20
CO	36,239	34,321	32,404	31,002	29,670	28,669	27,409	-11%	-18%
CO2	1,902,185	1,853,272	1,807,076	1,770,744	1,752,766	1,741,942	1,709,833	-5%	-8%
VOC	2,835	2,758	2,681	2,646	2,623	2,609	2,577	-5%	-7%
NOx	2,975	2,746	2,590	2,511	2,383	2,283	2,165	-13%	-20%
SOx	22	20	18	17	16	14	13	-15%	-28%
NH3	638	632	626	629	636	641	645	-2%	0%
N2O	29	29	29	29	29	30	30	-1%	2%
CH4	629	629	629	638	652	664	676	0%	4%
Lead	-	-	-	-	-	-	-	0%	0%
Butadiene	35	34	34	33	33	33	33	-4%	-4%
Acetaldehyde	68	78	114	174	236	270	319	68%	249%
Formaldehyde	196	191	223	261	274	303	330	13%	39%
Benzene	55	53	50	49	49	46	45	-9%	-11%
PM2.5	111	101	91	82	73	64	54	-18%	-34%
PM10	67	61	55	50	44	39	33	-18%	-34%


Life Cycle GHG Emissions

The Global Agenda for Climate Action calls for countries, cities and regions, businesses, and members of civil society around the world to achieve a low-carbon and climate-resilient economies in support of the Paris Agreement. Road Transportation accounts for 15% of total GHG emissions (IPCC,2023).


Ethanol gasoline blends are an internationally adopted practice that offer significant short-term benefits. Biofuels are an important solution to achieve reduction targets in the transportation sector.

Country GHG emission reductions are calculated using **RED II/III** and **GREET** life cycle emission methodologies and the **International Vehicular Emissions Model (IVE)**. Results are compared to the current country targets for 2035. Current 2024 country emission are those published by **IPCC**.


Current GHG Global Emissions Distribution

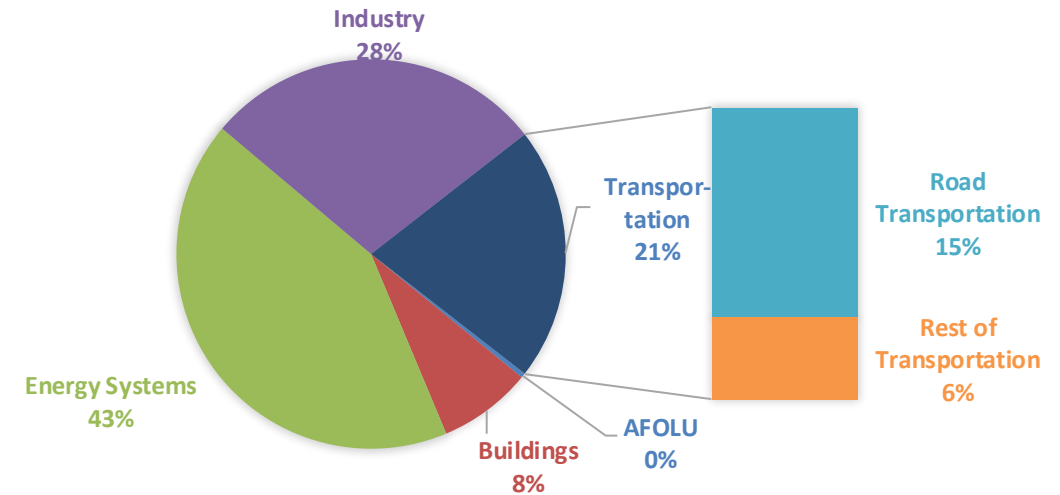

IPCC Transport Sector Sustainable Development Goals and climate policies Scenario, 2023

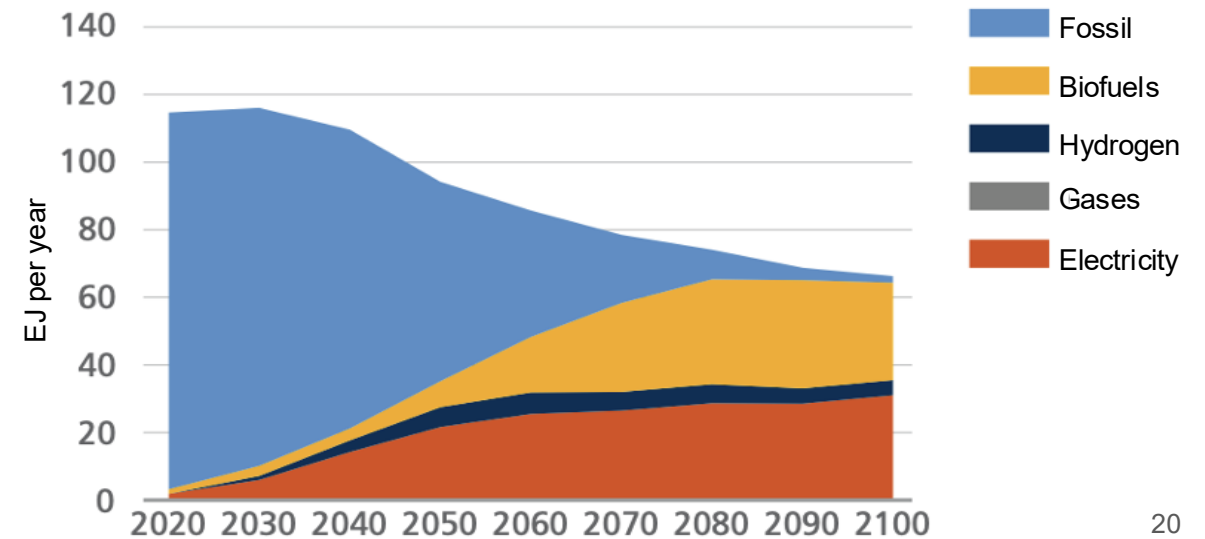

Latvia – Gasoline Vehicle Fleet Life Cycle GHG Emissions

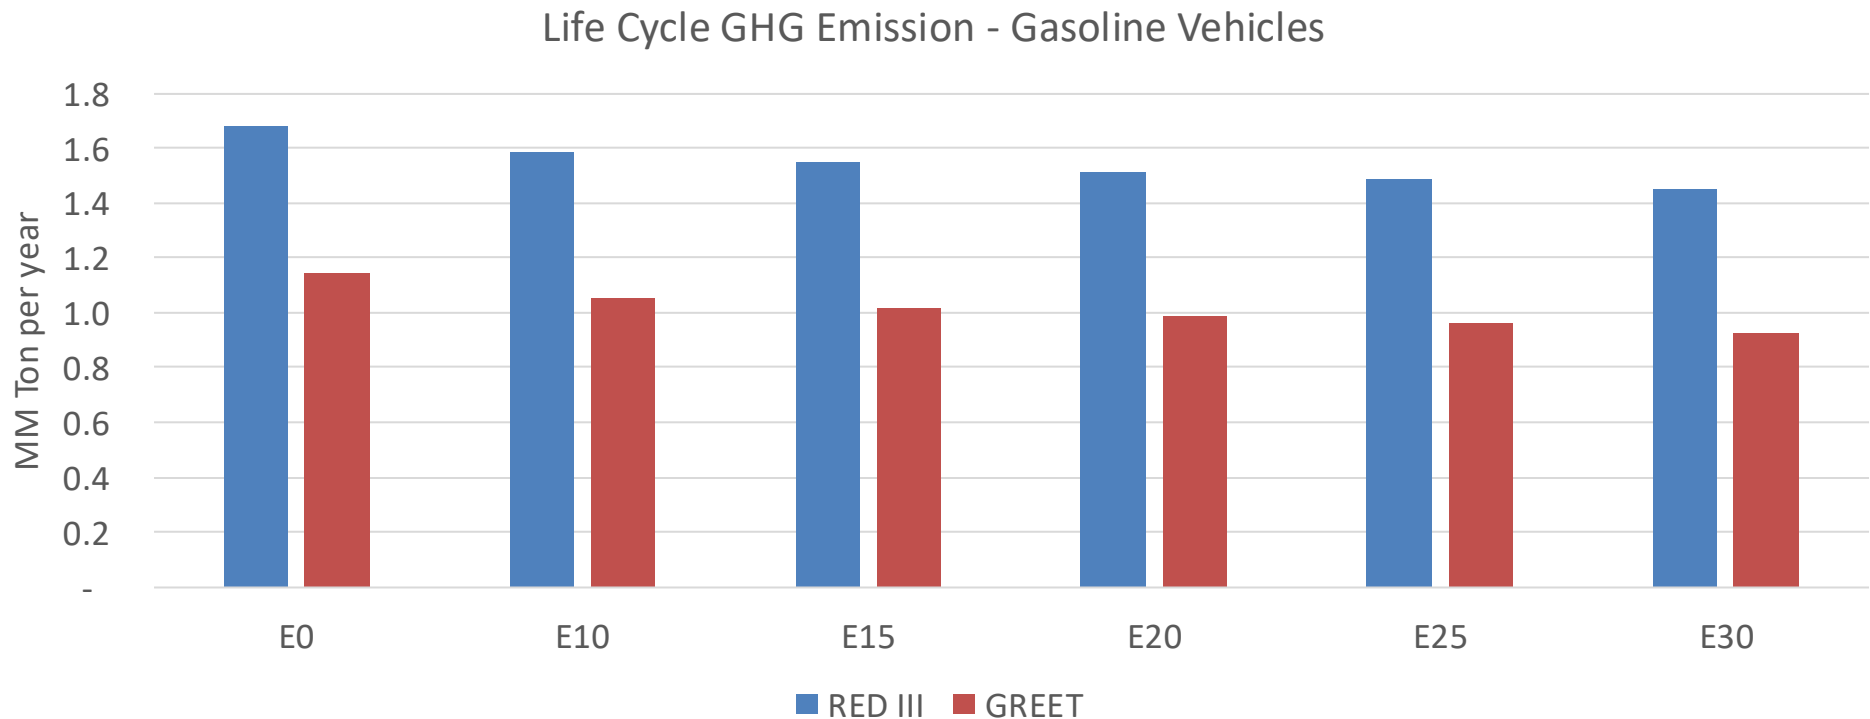

Country Emissions 2024 (MMT/año)	12.1
Target @ 2035 (MMT/year)	6.8
Delta	5.3

%Reduction vs E0	E0	E10	E15	E20	E25	E30
GREET 2024	0.0%	8.3%	11.0%	13.7%	15.9%	18.9%
RED II/III	0.0%	6.0%	8.1%	10.0%	11.6%	13.8%

% 2035 Target	E0	E10	E15	E20	E25	E30
GREET 2024	0.0%	1.8%	2.4%	3.0%	3.4%	4.1%
RED II/III	0.0%	1.9%	2.6%	3.2%	3.7%	4.4%

Source: Greet, RED II/III, IPCC, climateactiontracker.org, F90