

Ethanol Blending in Gasoline – Denmark


July 2026



**U.S. GRAINS &
BIOPRODUCTS
COUNCIL**

20 F St. NW, Suite 900 \ Washington, DC 20001
202-789-0789 \ www.grains.org

FARO90




www.faro90.com
+52 55 6122 2255

Ethanol Blending in Europe

There are important fuel quality and environmental impact of vehicle emission challenges in the Region.

- The use of ethanol improves gasoline quality and creates flexibility in gasoline production.
- Ethanol use is a cost-effective way to increase gasoline octane and to replace more expensive gasoline components.
- Ethanol contributes to transport decarbonization and air quality improvement.
- There are opportunities across Europe to increase the ethanol blend level and implement new policies on the use of gasoline-ethanol blends.

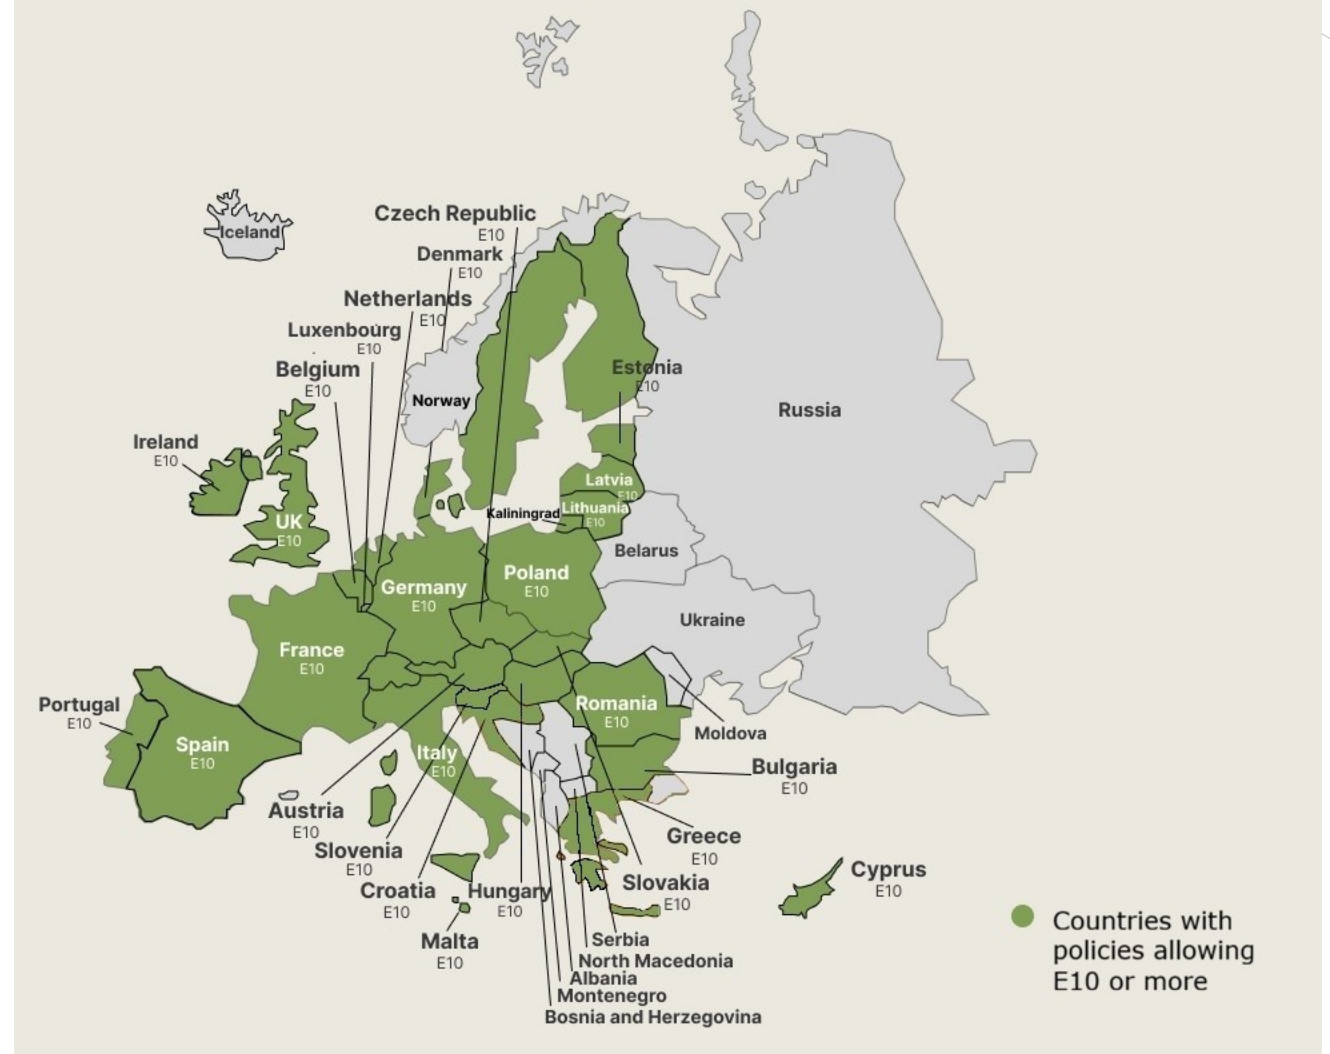

Twenty eight countries with potential and additional use of ethanol were studied: 1) Gasoline market profiles; 2) Optimization of gasoline blends with ethanol and, 3) Environmental impact of gasolines blended with ethanol.


Ethanol Gasoline Blending in Denmark




In 2025, gasoline consumption in Denmark was 1,576 million liters (416 million gallons) and growth rate was -1.3%. Gasoline production and net imports were 2,633 and -1,062 million liters (696 and -280 million gallons) correspondingly. Denmark complies with the European gasoline standards and offers two main grades: RON 95 and RON 98 with an average octane of 95.3 RON.

In 2025, ethanol consumption in Denmark was 242 million liters (64 million gallons) representing 18% of gasoline demand. Ethanol production and Net Imports were 206 and 270 million liters (54 and 72 million gallons) correspondingly.

Gasoline Demand in Denmark

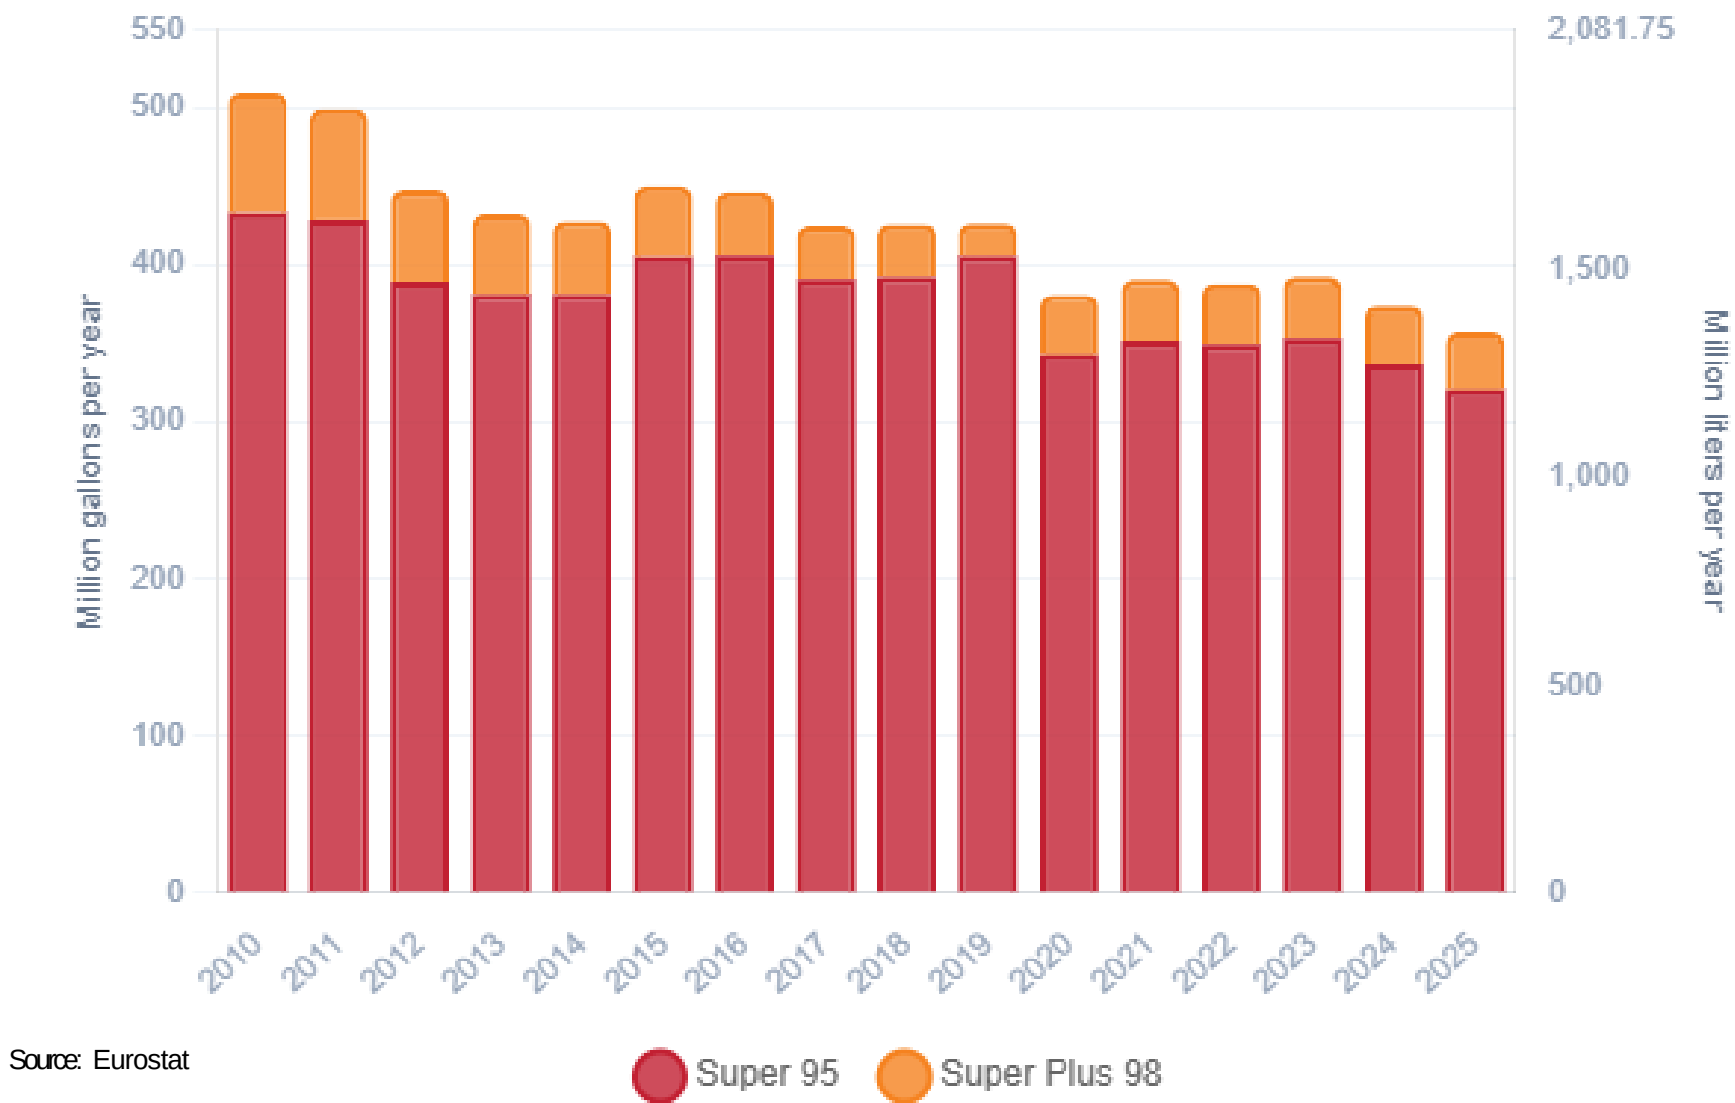


Gasoline Production in Denmark

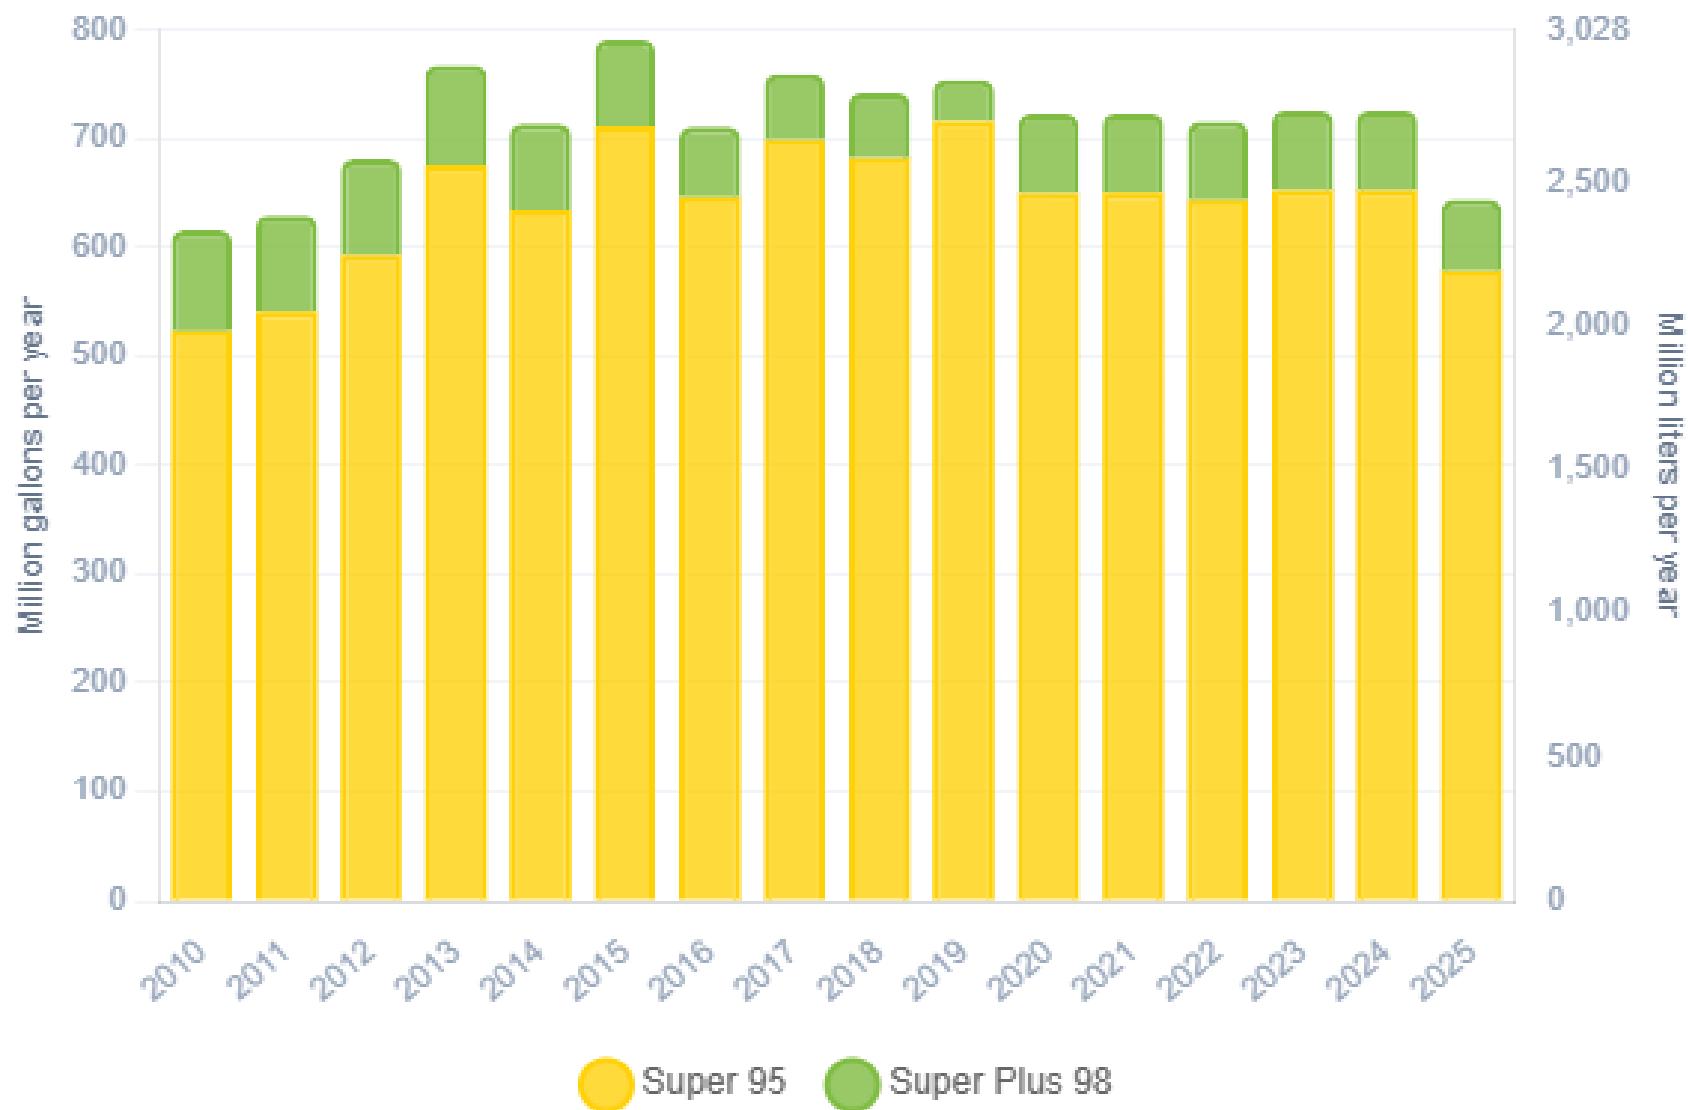


Source: Eurostat

Gasoline Imports in Denmark

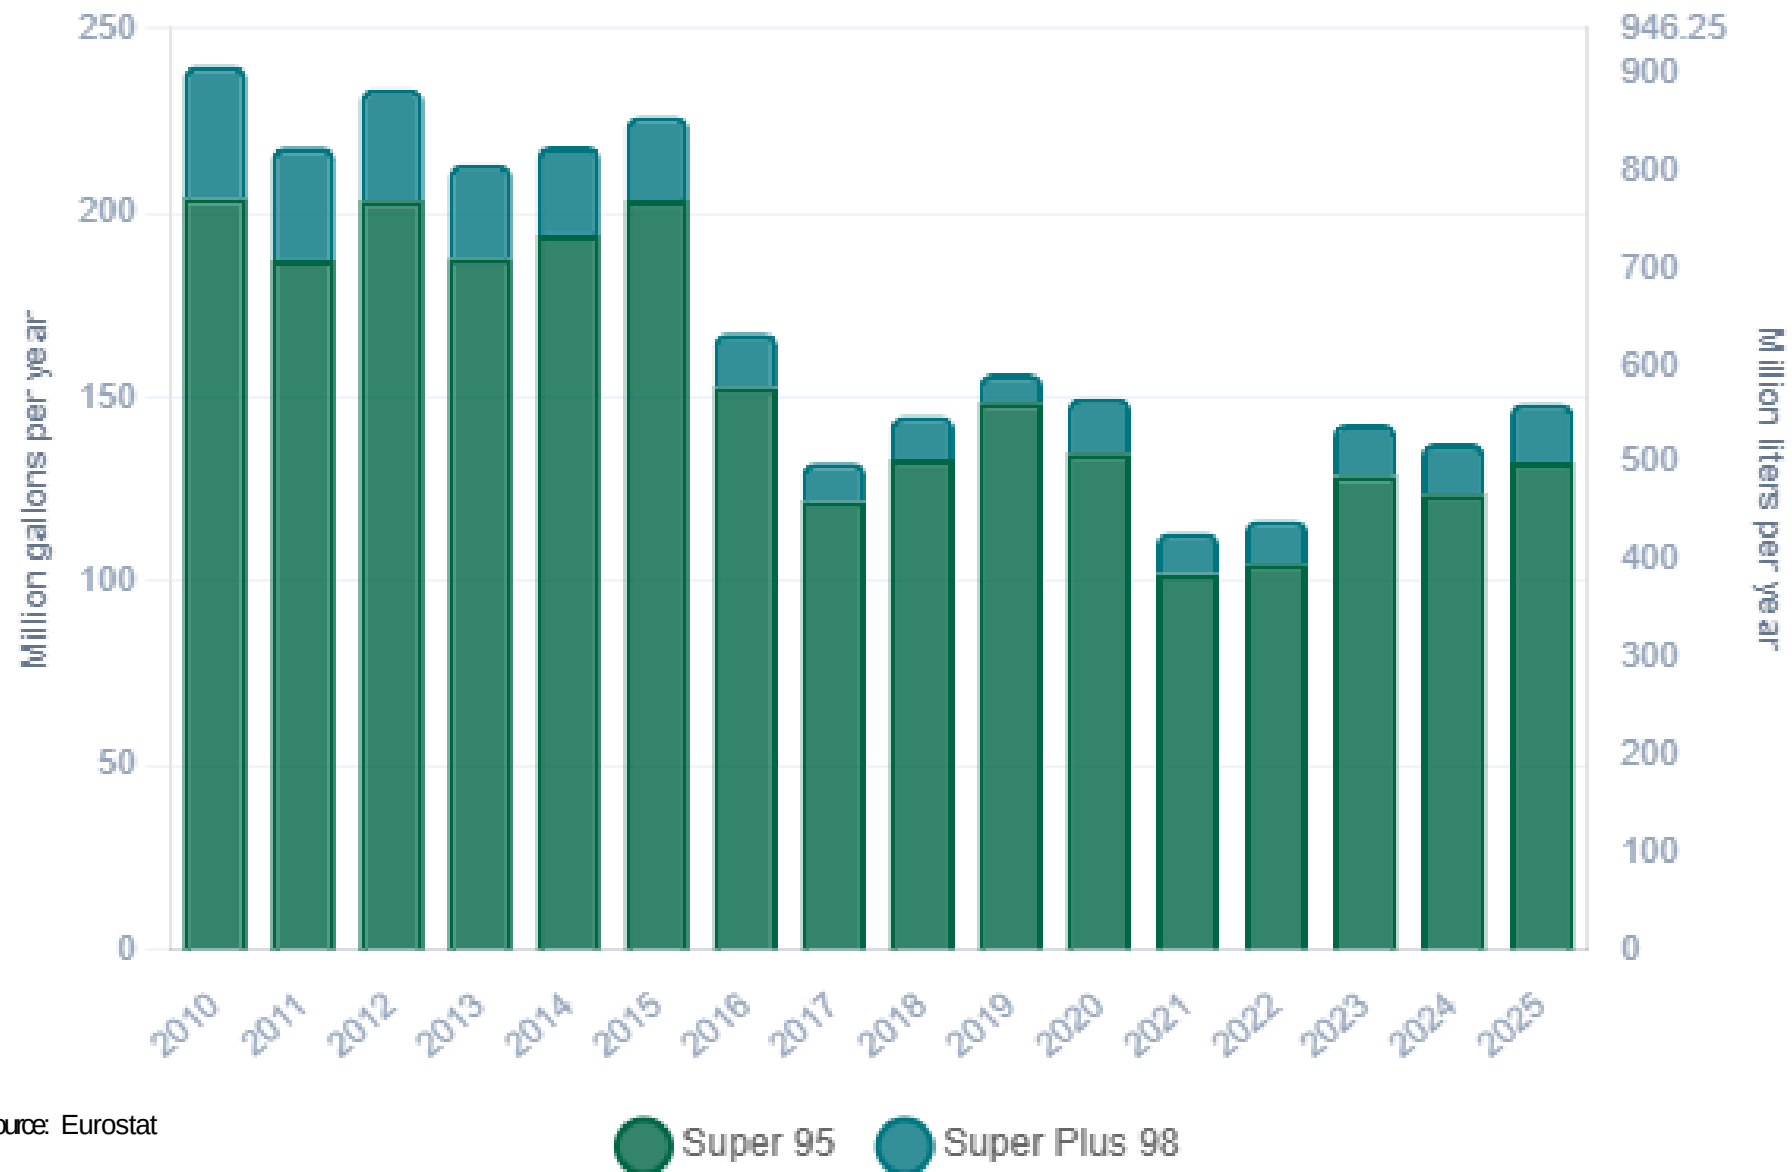


Gasoline Exports in Denmark

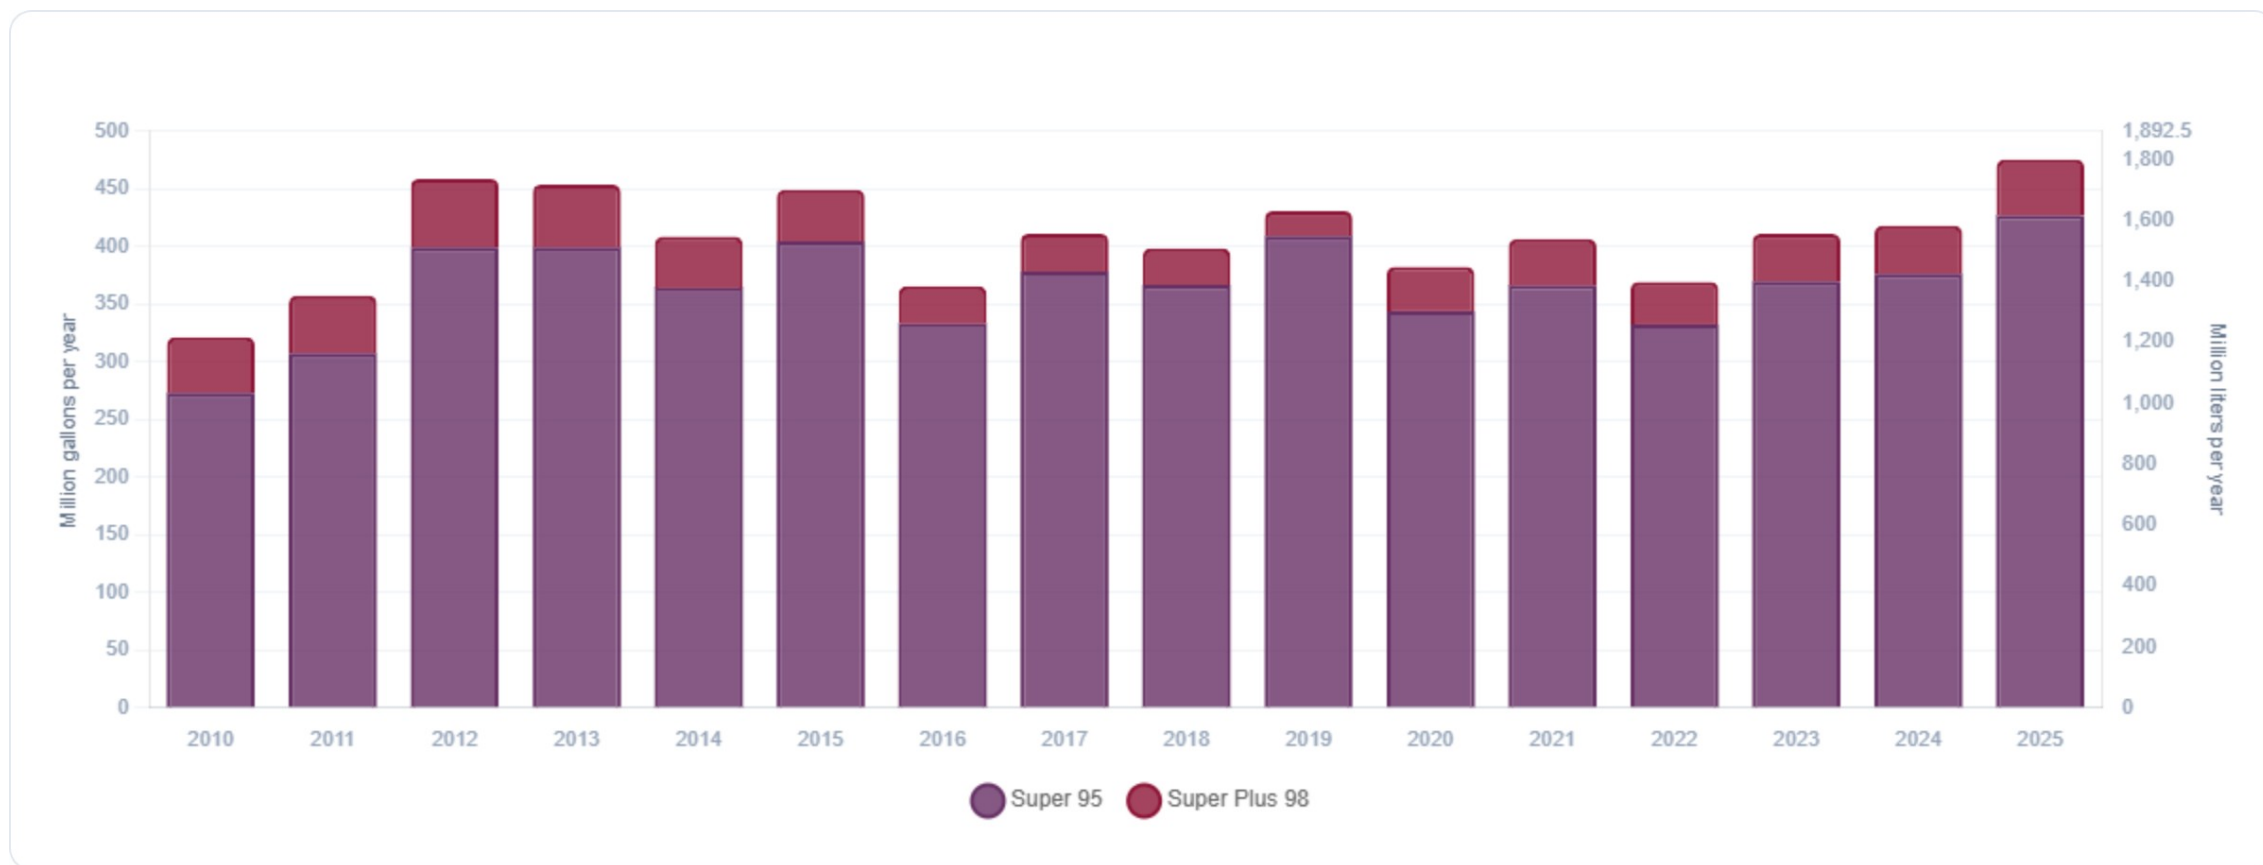

Source: Eurostat

Ethanol Balance in Denmark

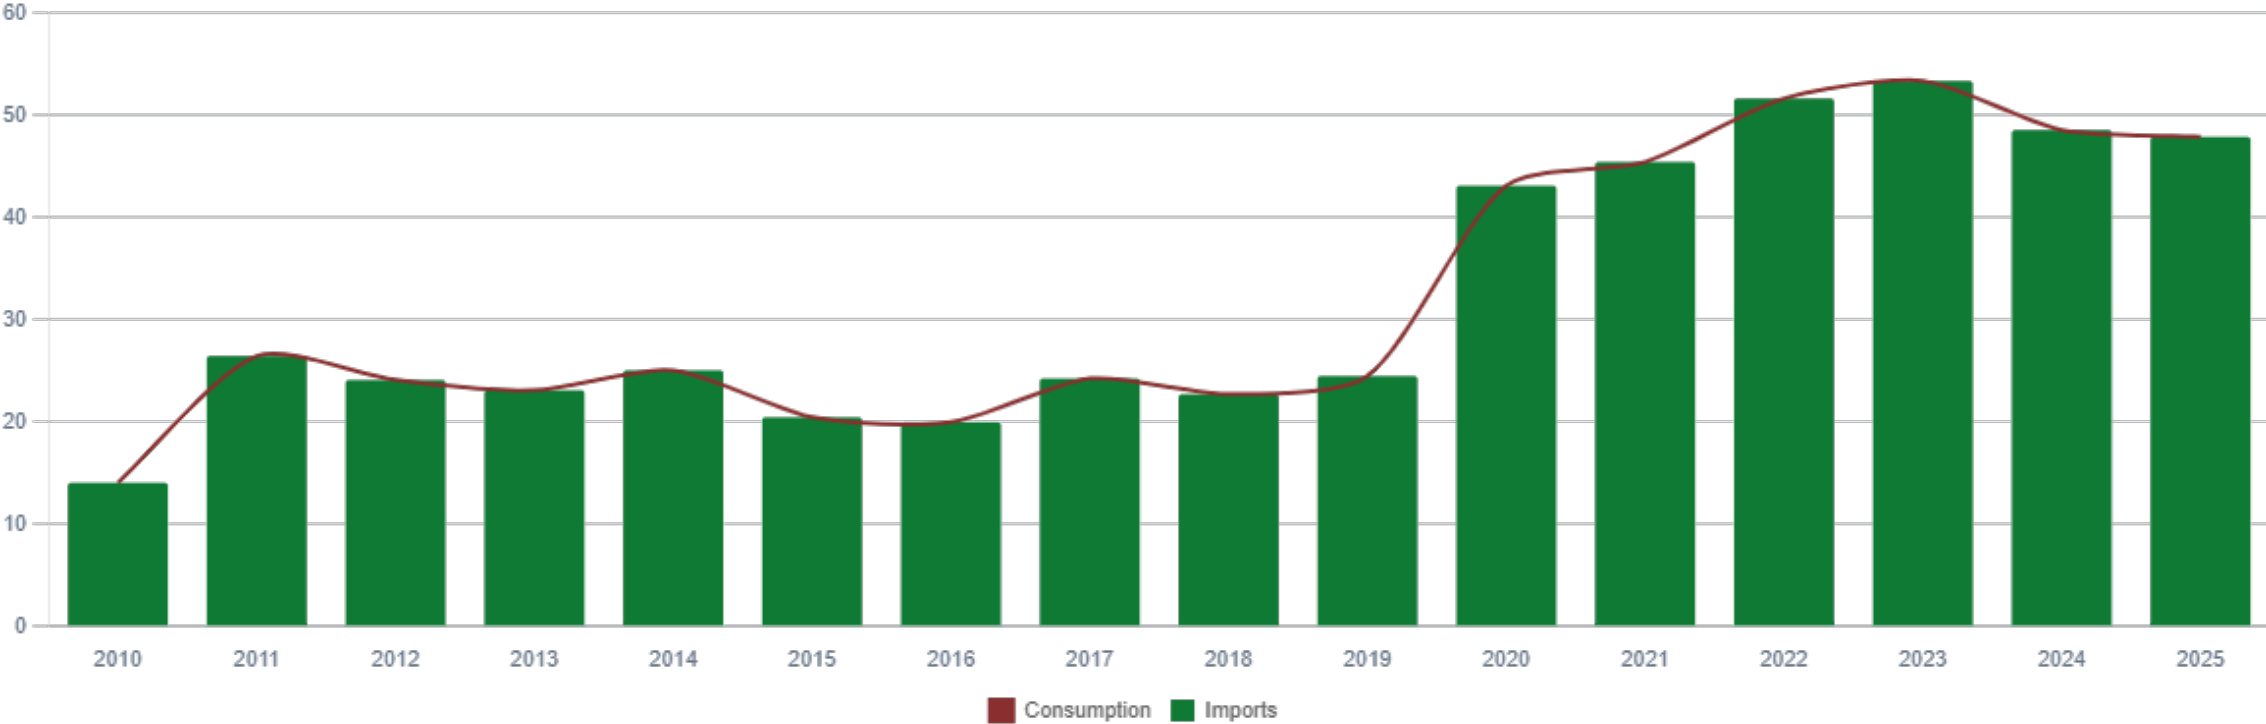

Source: Eurostat


Gasoline Quality in Denmark

Name	EN 228:2025 (Euro 6); Country Level Fuel Ordinances							
Implementation Date	2025							
Applicability	All EU Contries + UK							
Grade	RON 95 E5		RON 95 E10		RON 98 E5		RON 98 E10	
	Min	Max	Min	Max	Min	Max	Min	Max
RON	95.0		95.0		98.0		98.0	
MON	> 85	> 88	> 85	> 88	> 85	> 88	> 85	> 88
AKI								
Benzene (%vol)	< 1							
Aromatics (% vol)	< 35							
Olefins (%vol)	< 18							
Lead (g/L)	< 0.005							
Manganese (mg/L)	< 2,0							
Sulfur (ppm)	10.0							
Oxygen (%w)*	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7
Ethanol (%vol)	< 5	< 10	< 5	< 10	< 5	< 10	< 5	< 10
PVR 37.8°C (psi)	<> 45 - 100 kPa in 6 Volatility Classes							
Overall Biofuels (%cal)	-							
Advanced Biofuels (%cal)	1.0							
Bioethanol in Gasoline Sales (%cal)	-							
GHG Emission Reduction (%)	5.2							

* Methanol 3%, Iso-propyl alcohol 12%, Ter-butyl alcohol 15%, Iso-butyl alcohol 15%, Ethers +5 Carbons 22%, Other Oxygenates 15%

Source: European Commision


Gasoline Component Blending in Europe



Gasoline is a blend of a base gasoline and other components. Each component provides different properties to the final blend, for example, isomerates, alkylates and butanes increase the octane. The components commonly used in Europe are:

- Catalytic Gasoline
- Light Primary Naphta
- Heavy Primary Naphta
- Reformate
- Isopentane
- Alkylate
- Isomerate
- Hydrocracked Gasoline
- Coker Naphta
- n-Butane
- MTBE
- ETBE
- TAME
- Aromatics

Source:
Faro90

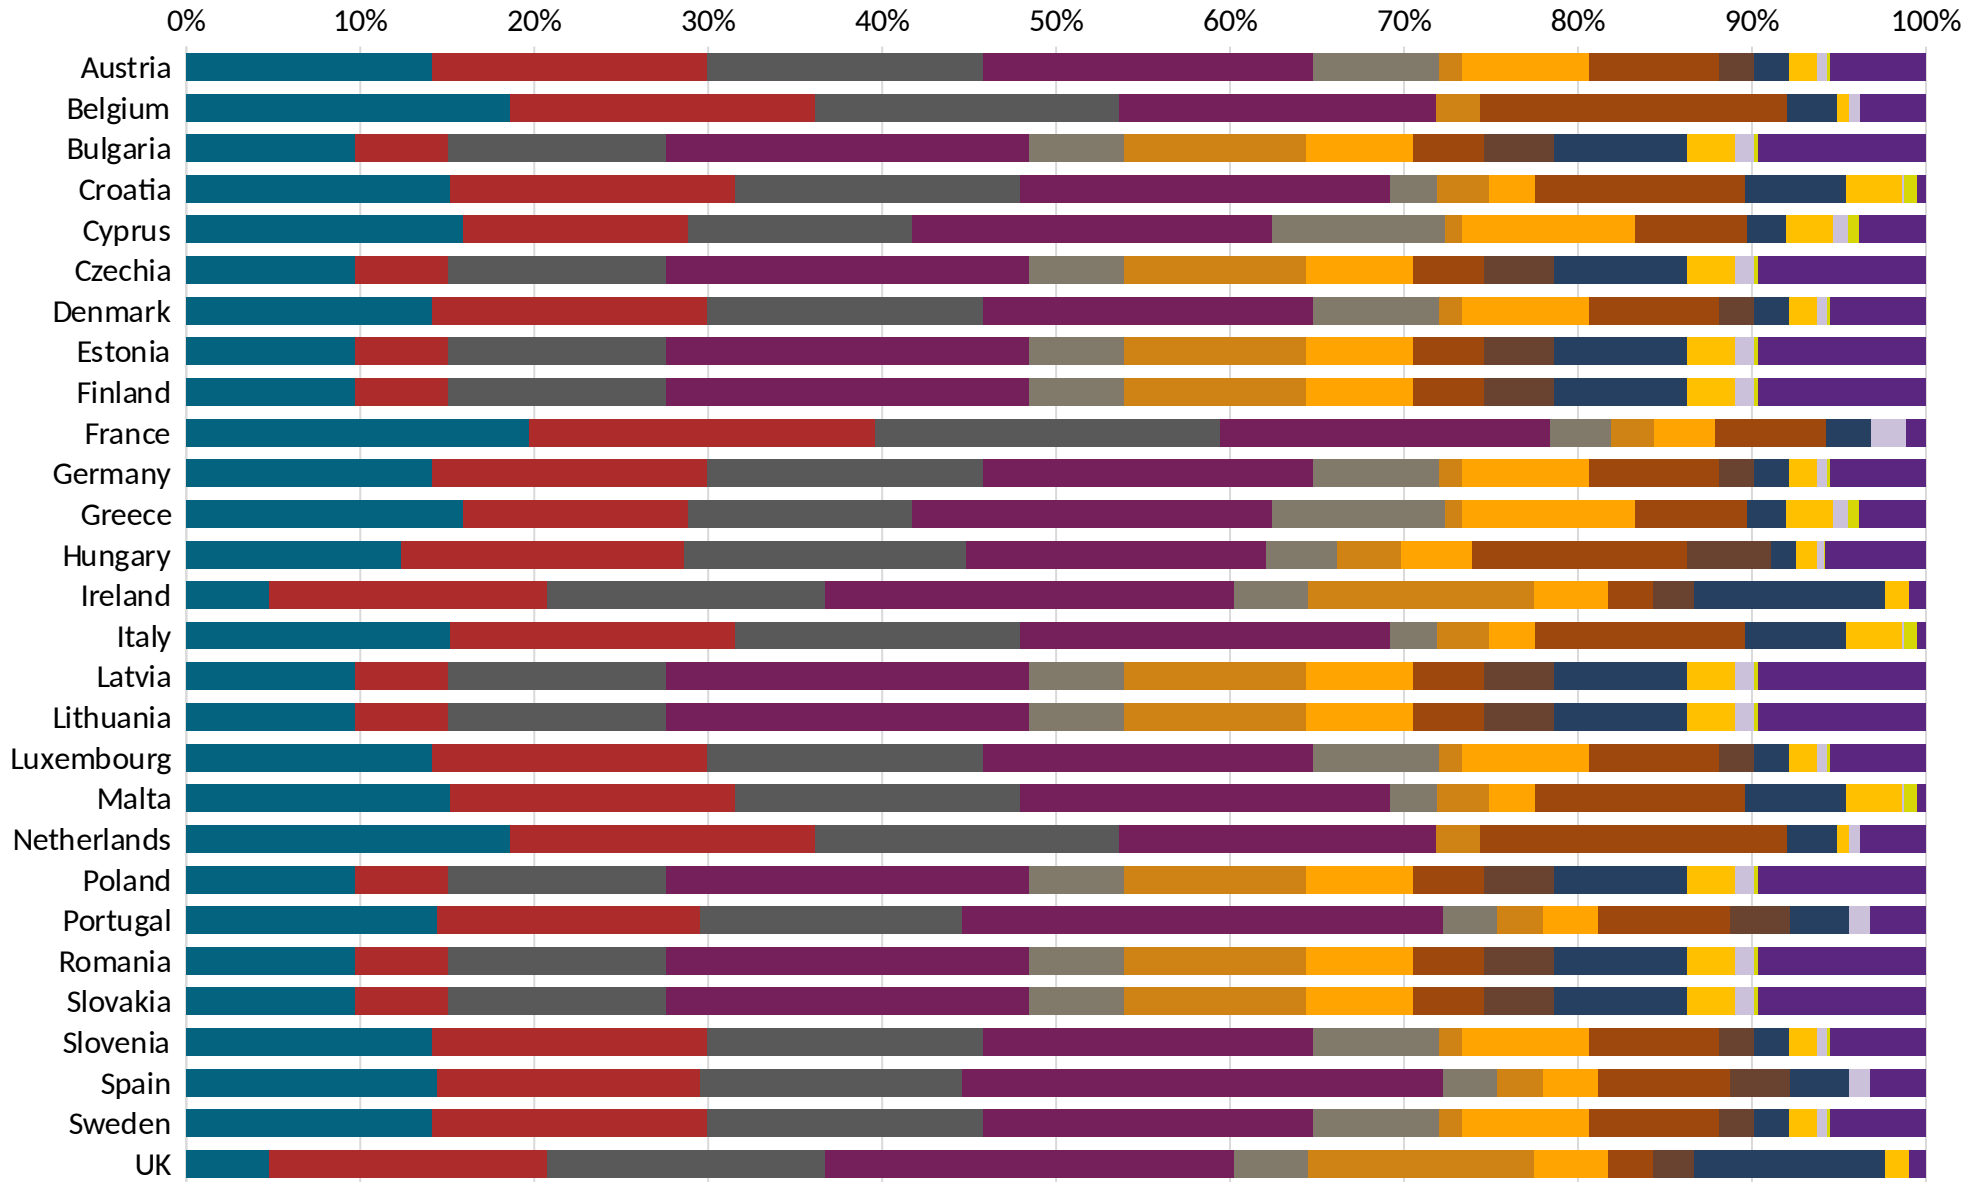


Gasoline Blending Optimization

In some parts of the world, ethanol is added to gasoline as a blending component. The advantages of ethanol include that it is a renewable fuel made of biomass; that it is an octane booster that helps to dilute sulfur; and that it allows the fulfillment of environmental objectives. To determine the optimal components to be blended with ethanol, a **blending model** was used. This model selects the components to add in the gasoline/ethanol blend based on:


- Components prices,
- Properties each component affects,
- Quality parameters by country, and
- Component availability by country.

Through iterations, the model obtains the %v/v of the components to be blended with 10%, 15%, 20%, 25% and 30% of ethanol, in such a way that the final blend complies with the required properties of a finished gasoline by country.


The blending model uses gasoline component spot average prices 2025 and provides fuel prices that do not include country distribution costs, local taxes and subsidies and import or gas station margins.

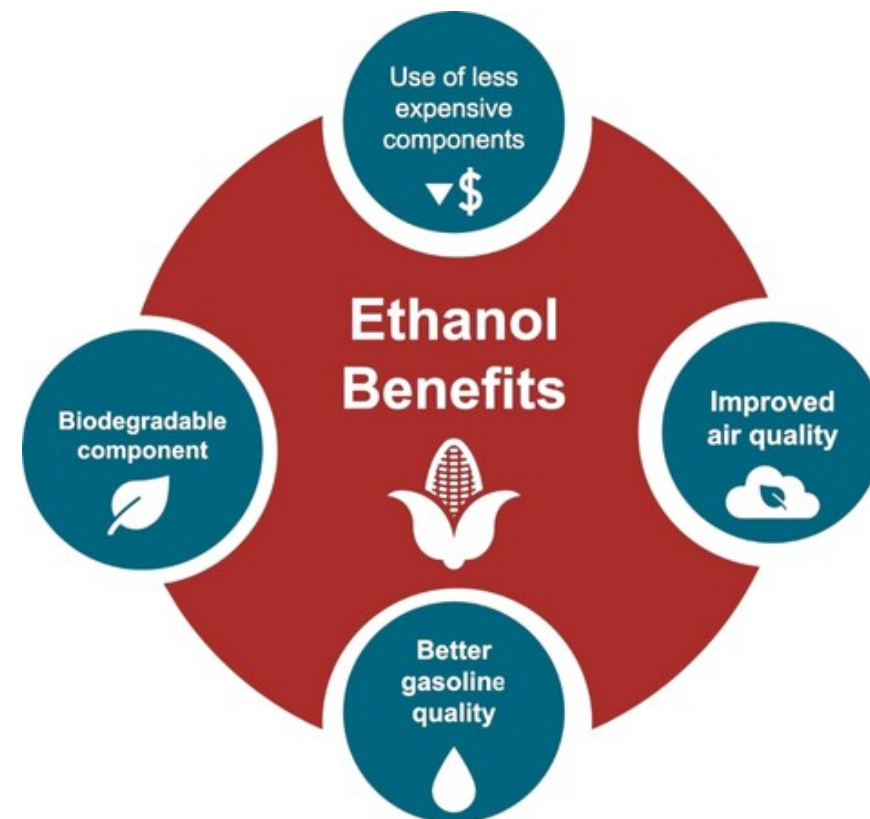

Denmark Available Blending Components

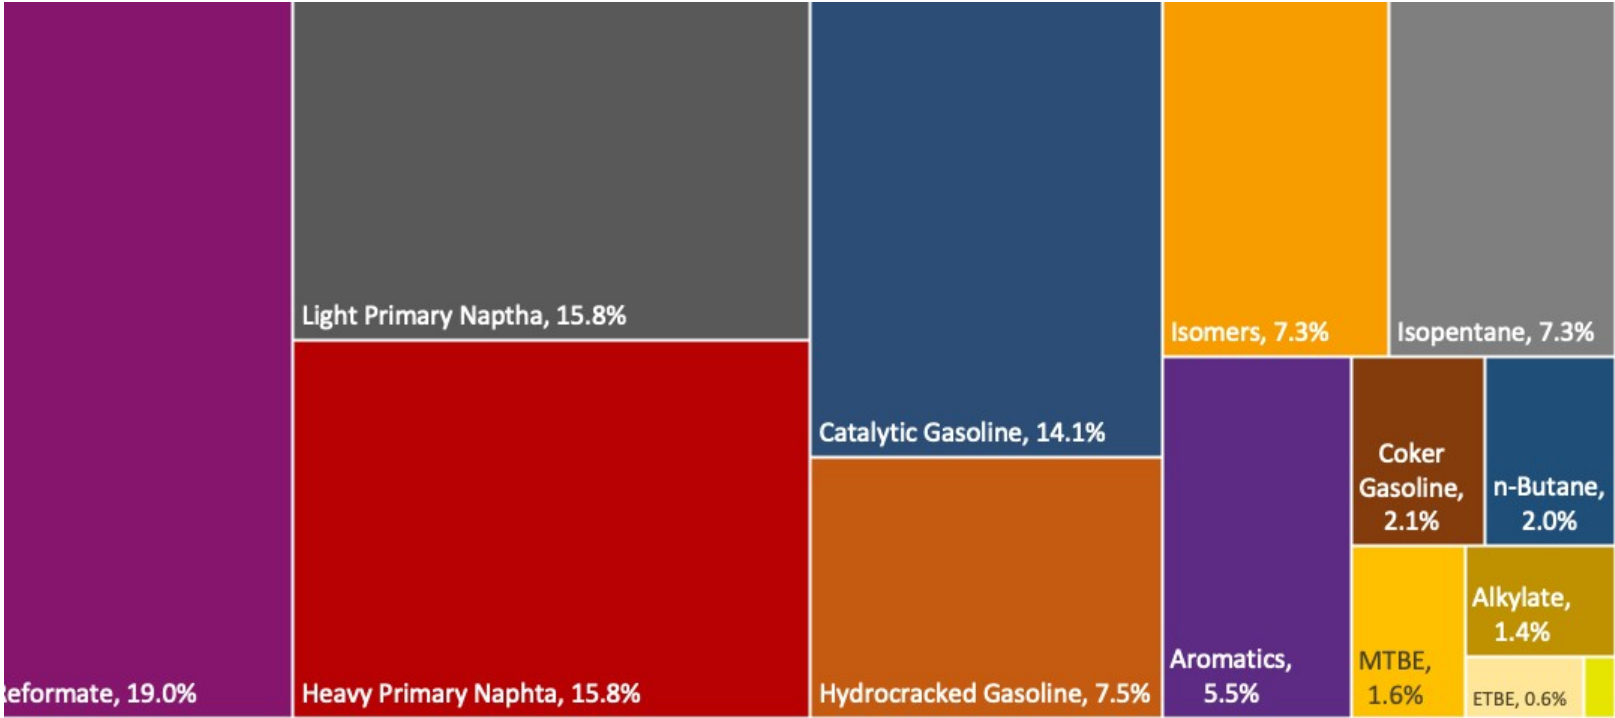


Denmark – Gasoline 95 – Constant Octane

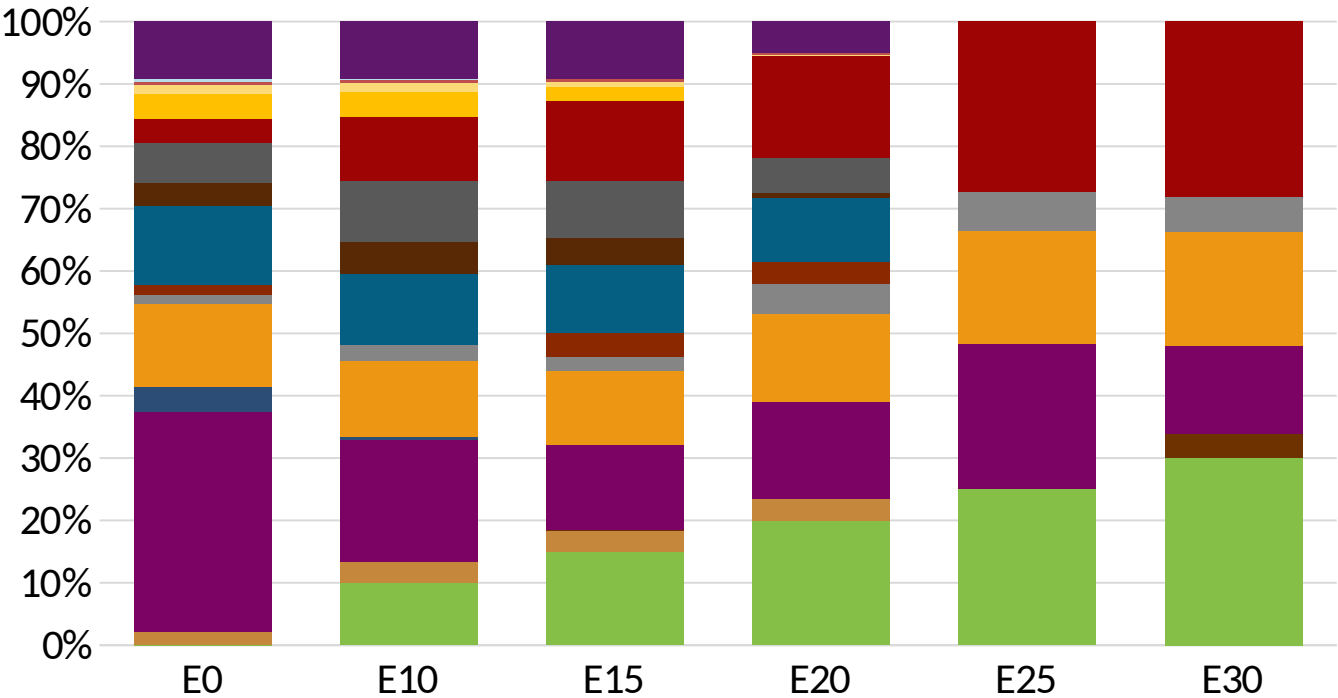

Average CIF 2025 Prices

Octane (RON)	95.0	95.0	95.0	95.0	95.1	95.6
Price (US\$/gal)	\$ 2.069	\$ 1.941	\$ 1.880	\$ 1.799	\$ 1.677	\$ 1.612


Denmark - Gasoline 98 - Constant Octane

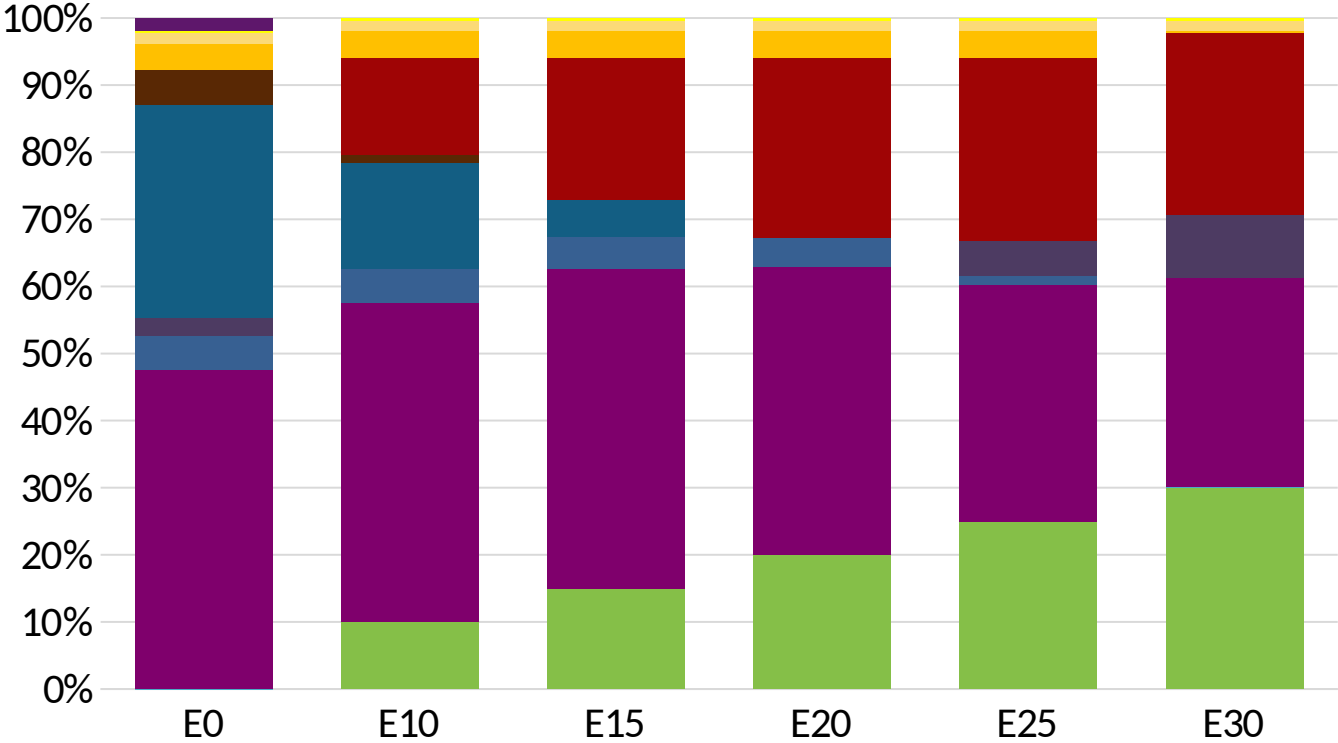

Average CIF 2025
Prices

Octane (RON)	98.0	98.0	98.0	98.0	98.0	98.0
Price (US\$/gal)	\$ 2.144	\$ 2.015	\$ 1.943	\$ 1.866	\$ 1.789	\$ 1.722



Denmark – Gasoline 95 – Increased Octane

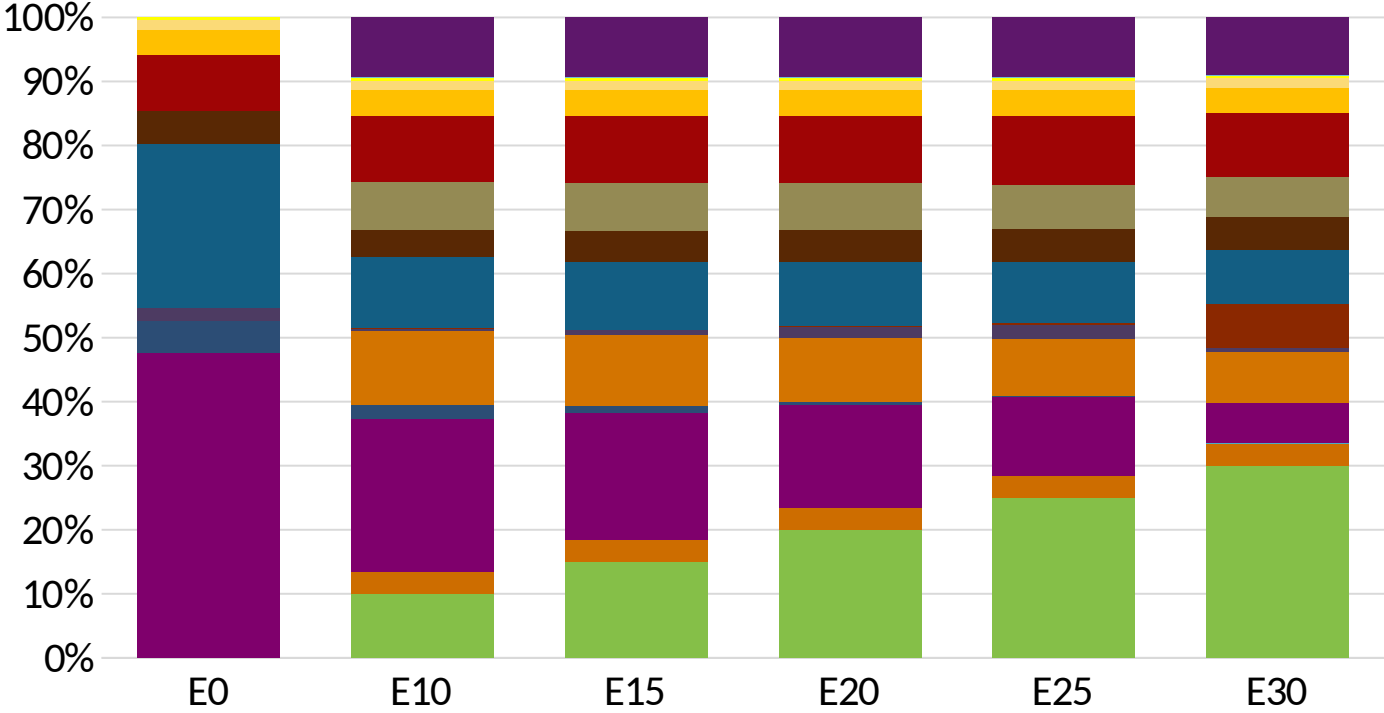

Average CIF 2025
Prices

Octane (RON)	95.0	96.5	97.9	99.4	100.8	102.0
Price (US\$/gal)	\$ 2.006	\$ 2.006	\$ 2.006	\$ 2.006	\$ 2.006	\$ 2.006

Denmark – Gasoline 98 – Increased Octane

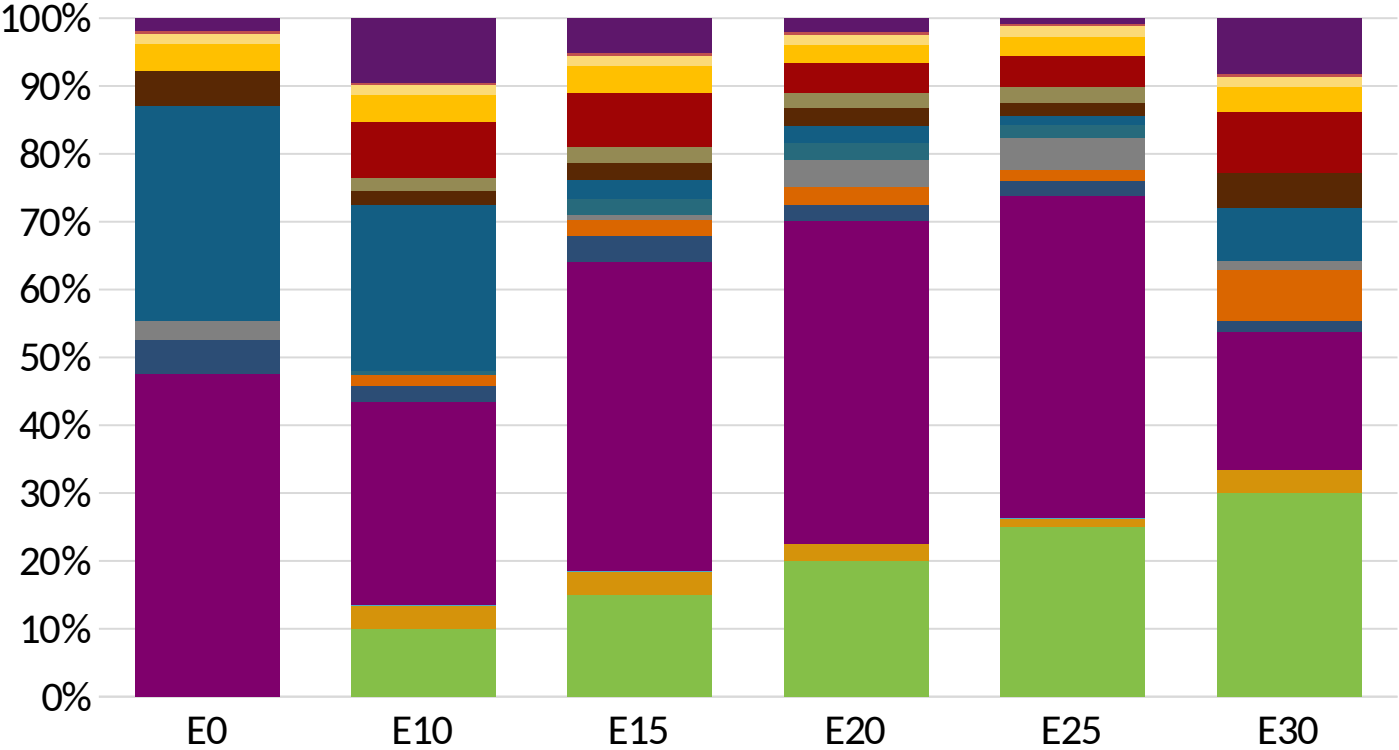

Average CIF 2025
Prices

Octane (RON)	98.0	99.2	101.3	102.6	104.0	104.7
Price (US\$/gal)	\$ 2.144	\$ 2.144	\$ 2.144	\$ 2.144	\$ 2.144	\$ 2.144

Vehicle Emission Impact for Ethanol Gasoline Blending

The model used in this analysis takes as a reference the [International Vehicle Emissions Model \(IVE\)](#).

The model uses the Base Emission Rates from IVE model, as well as its Adjustment Factors based on:


- Vehicle technology (cars, trucks, buses, motorcycles),
- Vehicle fleet average age,
- Average traveled distance per vehicle by country, as well as
- Geographical and climatic conditions (altitude, humidity, temperature).

Emissions of criteria pollutants, toxic pollutants, and greenhouse gases (GHG) were calculated and calibrated with emission inventories, using real gasoline quality data. The reduction rates for gasoline/ethanol blends were obtained from various sources (IPCC, US Grains, among others).


Emission estimations for different pollutants for gasoline and gasoline/ethanol blends (10%, 15%, 20%, 25% and 30% ethanol) were determined using the IVE Model. A comparison between the results and the European (Euro 6) requirements is made. Results are also compared with real emissions of the United States vehicle fleet*.

*Source: Bureau of transportation statistics.

Main Results

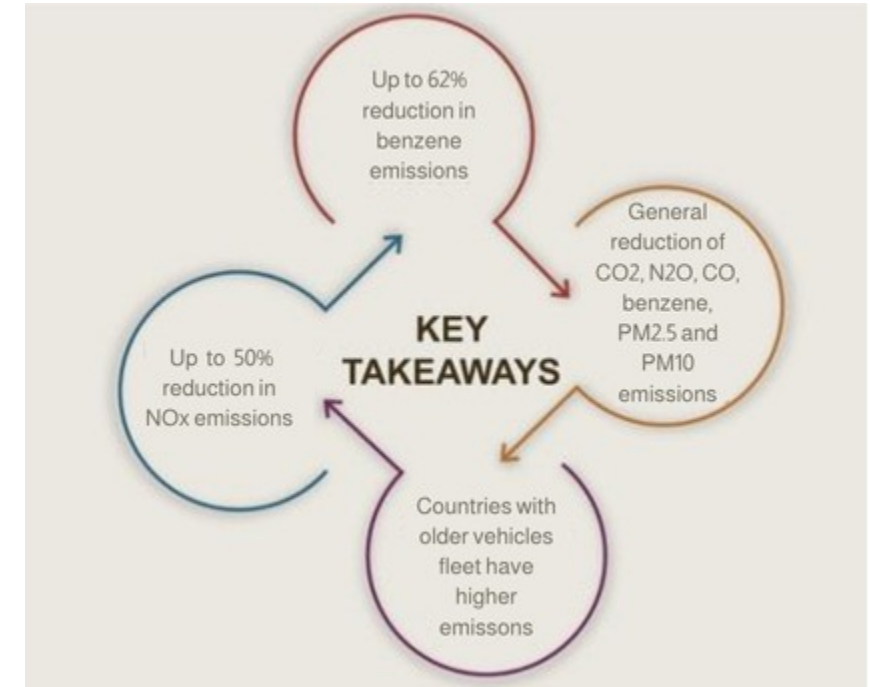







Gasoline Vehicle Fleet - Denmark

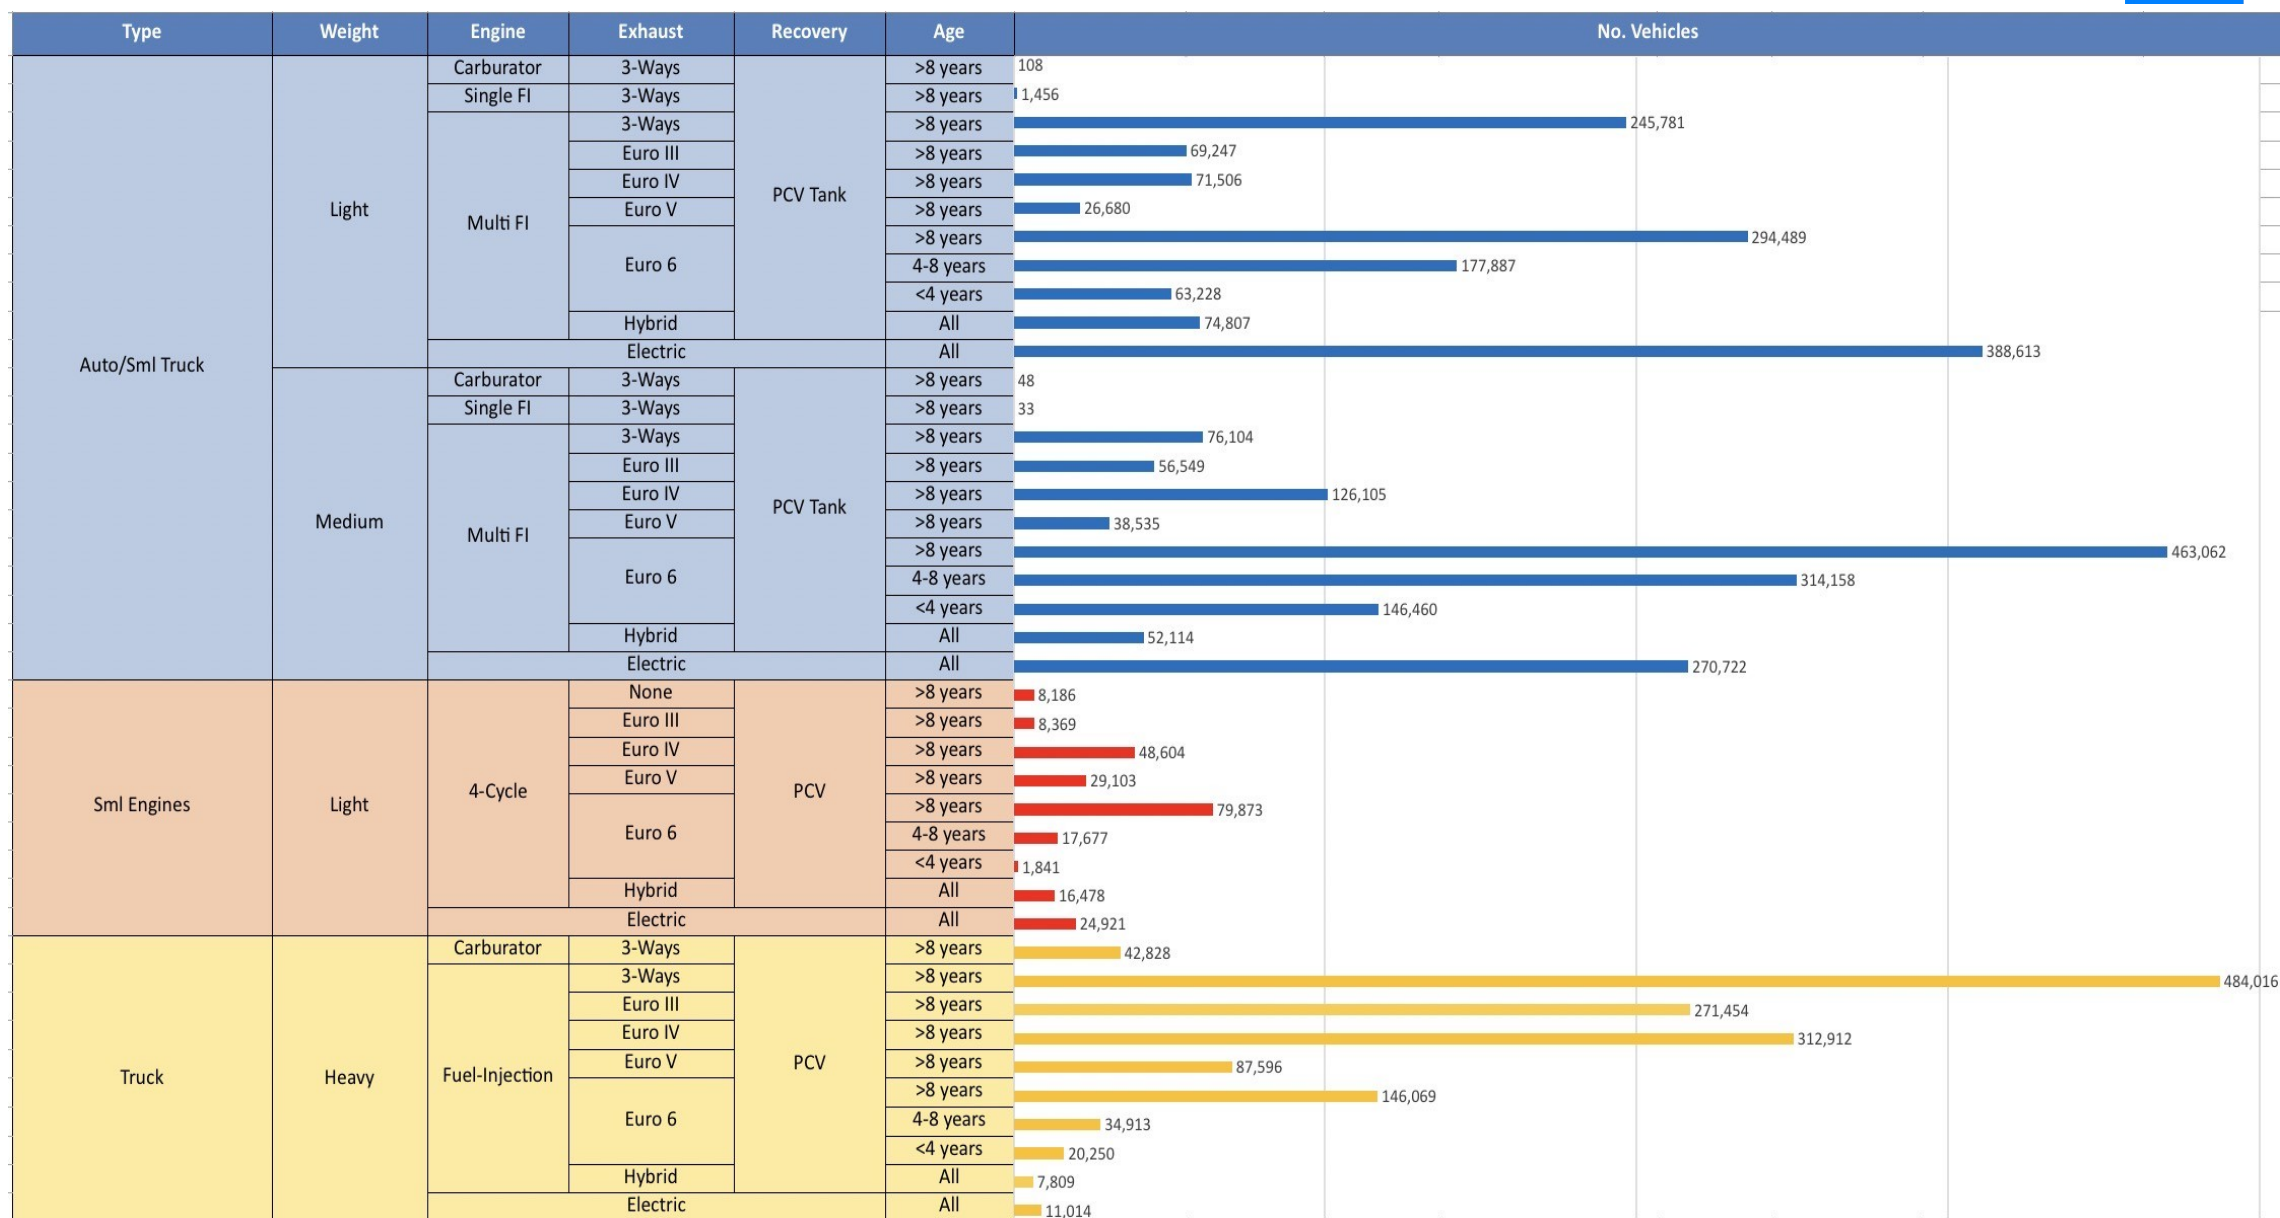

Vehicle Fleet: 4,611,606
Gasoline Vehicle Fleet: 2,006,235

Source: Eurostat, ACEA

Denmark – Vehicular Emissions

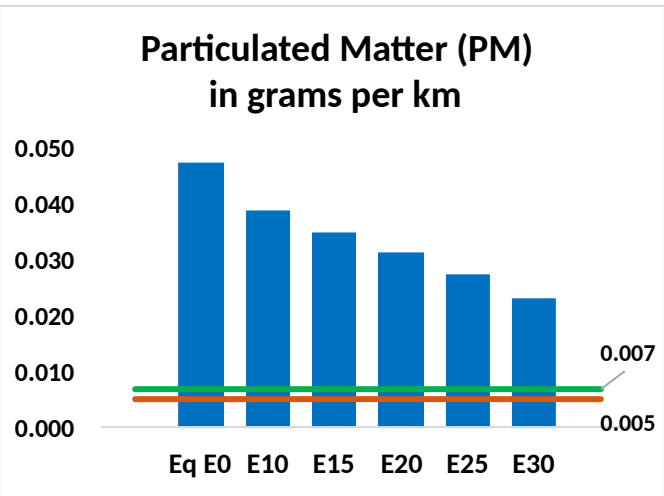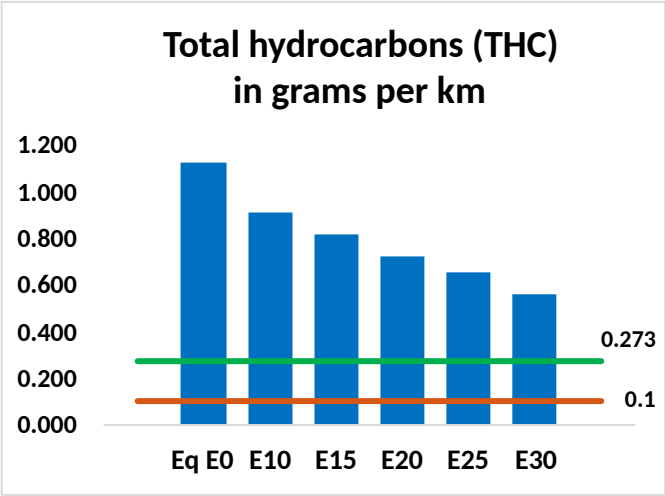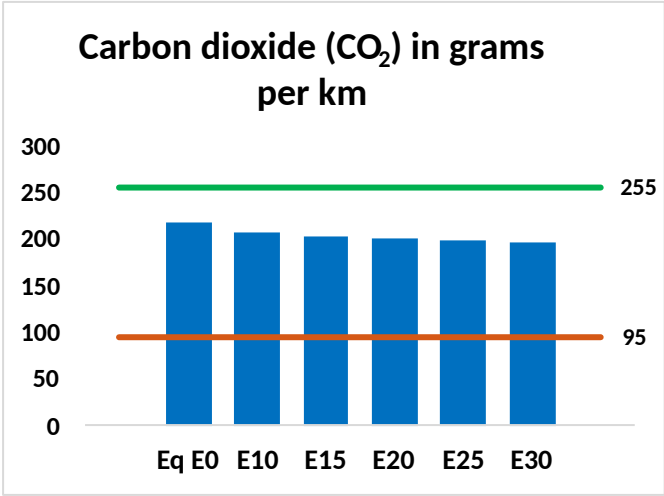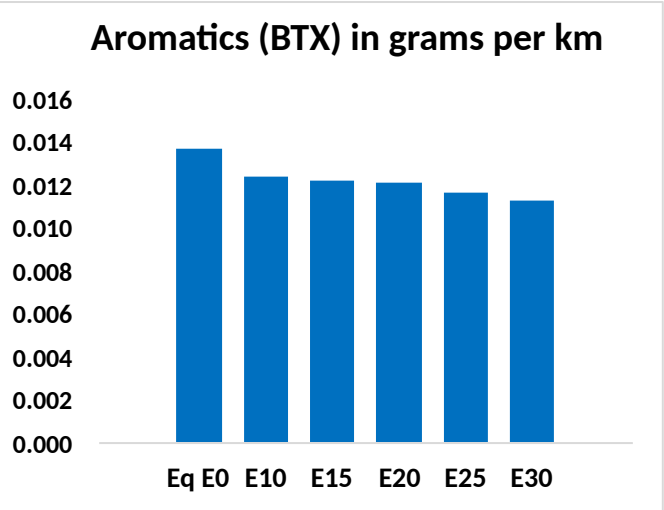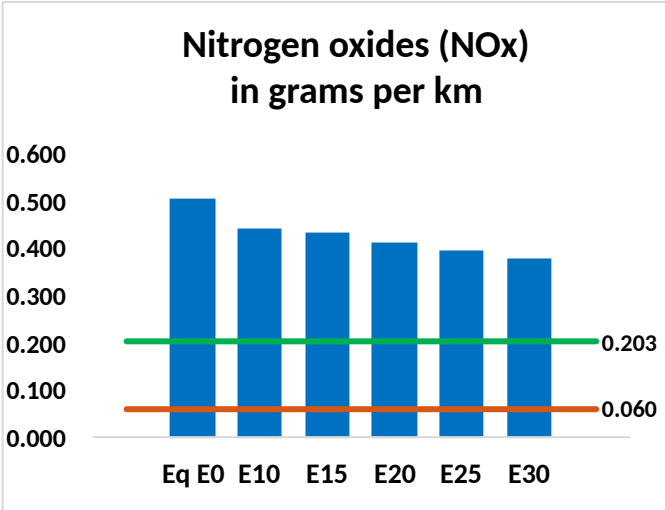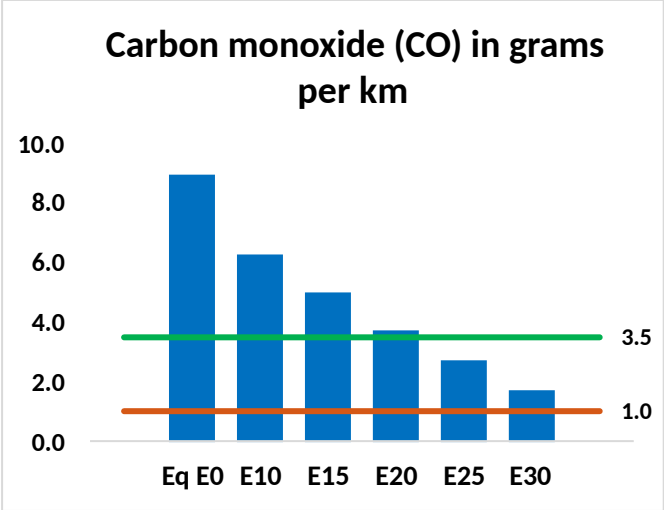

Denmark – Vehicular Emissions

Vehicular Fleet Emissions (kg/day)	Eq E0	E5	E10	E15	E20	E25	E30	Reduction (%)	
								E10	E20
CO	465,396	395,228	325,060	260,850	193,145	140,152	88,368	-30%	-58%
CO2	11,263,940	10,974,295	10,700,743	10,485,601	10,379,141	10,320,268	10,130,036	-5%	-8%
VOC	58,468	52,875	47,282	42,485	37,559	33,741	28,752	-19%	-36%
NOx	26,309	24,292	23,026	22,443	21,435	20,676	19,763	-12%	-19%
SOx	132	122	112	104	96	87	78	-15%	-28%
NH3	4,000	3,960	3,921	3,939	3,984	4,015	4,041	-2%	0%
N2O	262	260	259	260	266	269	272	-1%	2%
CH4	11,744	11,744	11,744	11,920	12,178	12,401	12,613	0%	4%
Lead	-	-	-	-	-	-	-	0%	0%
Butadiene	373	341	310	283	256	236	208	-17%	-31%
Acetaldehyde	978	1,122	1,647	2,508	3,417	3,904	4,613	68%	249%
Formaldehyde	3,638	3,537	4,123	4,841	5,072	5,611	6,108	13%	39%
Benzene	709	681	646	636	630	603	583	-9%	-11%
PM2.5	607	552	497	448	401	350	296	-18%	-34%
PM10	1,853	1,685	1,516	1,368	1,223	1,068	905	-18%	-34%


Life Cycle GHG Emissions

The Global Agenda for Climate Action calls for countries, cities and regions, businesses, and members of civil society around the world to achieve a low-carbon and climate-resilient economies in support of the Paris Agreement. Road Transportation accounts for 15% of total GHG emissions (IPCC,2023).


Ethanol gasoline blends are an internationally adopted practice that offer significant short-term benefits. Biofuels are an important solution to achieve reduction targets in the transportation sector.

Country GHG emission reductions are calculated using **RED II/III** and **GREET** life cycle emission methodologies and the **International Vehicular Emissions Model (IVE)**. Results are compared to the current country targets for 2035. Current 2025 country emission are those published by **IPCC**.


Current GHG Global Emissions Distribution

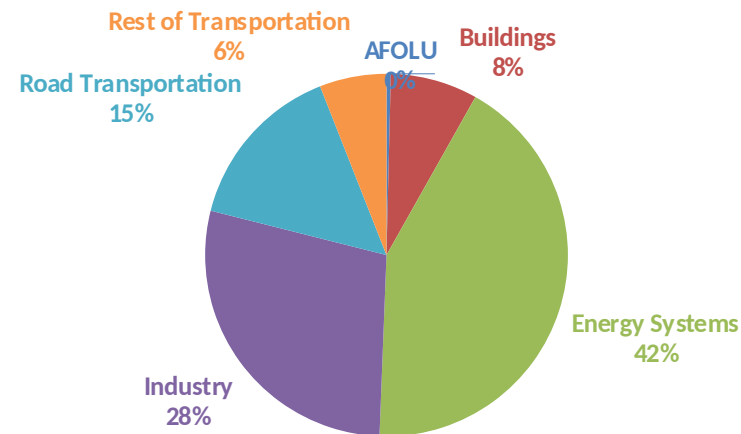

IPCC Transport Sector Sustainable Development Goals and climate policies Scenario, 2023

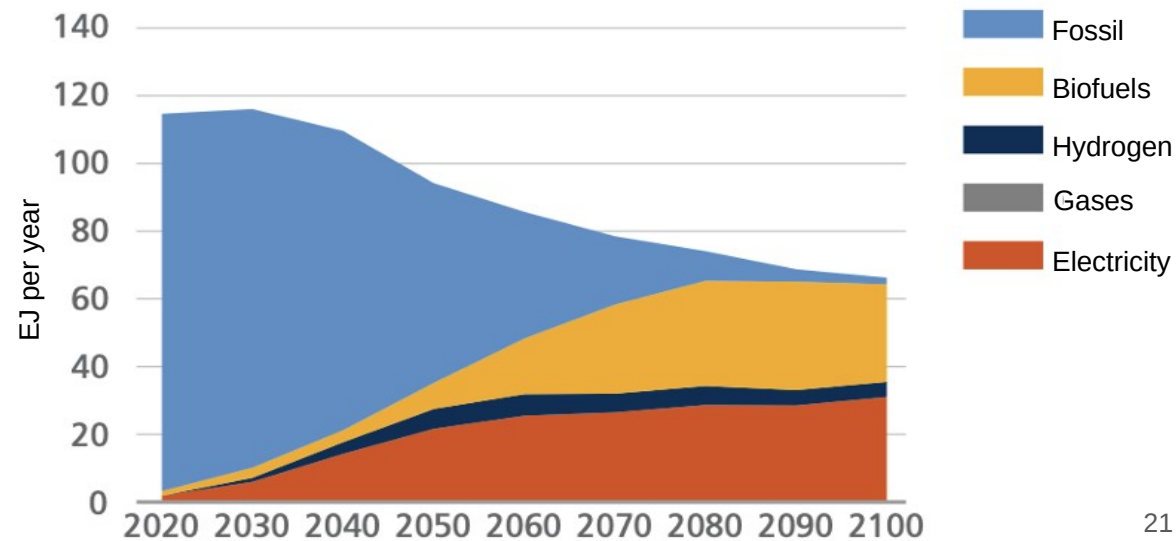

Denmark – Gasoline Vehicle Fleet Life Cycle GHG Emissions

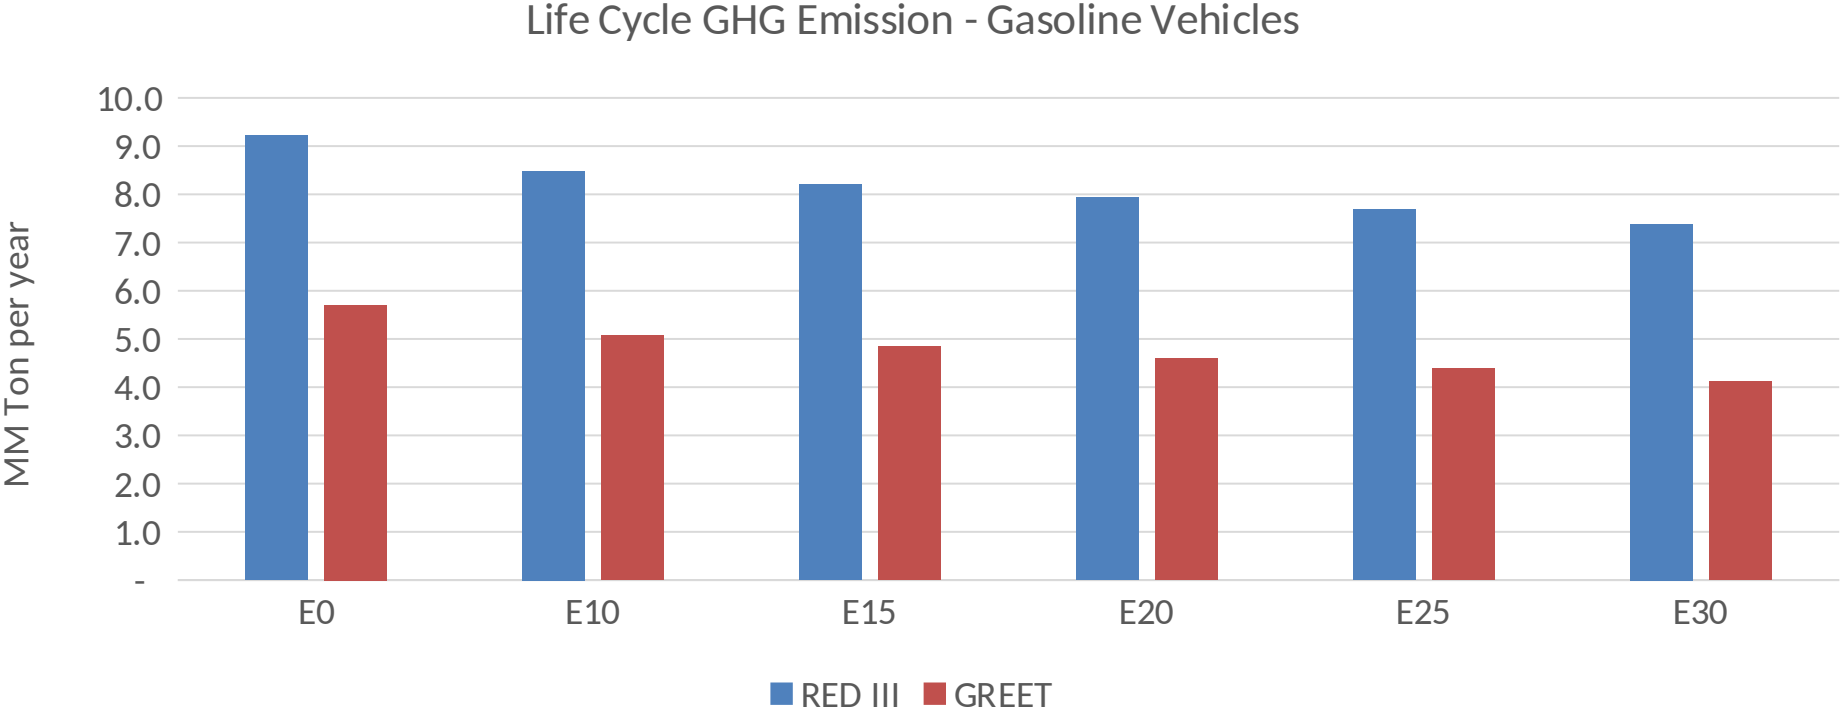

Country Emissions 2025 (MMT/año)	45.5
Target @ 2035 (MMT/year)	25.6
Delta	19.9

Source: Greet, RED II/III, IPCC, climateactiontracker.org, F90