

Ethanol Blending in Gasoline – Poland


July 2026



**U.S. GRAINS &
BIOPRODUCTS
COUNCIL**

20 F St. NW, Suite 900 \ Washington, DC 20001
202-789-0789 \ www.grains.org

FARO90




www.faro90.com
+52 55 6122 2255

Ethanol Blending in Europe

There are important fuel quality and environmental impact of vehicle emission challenges in the Region.

- The use of ethanol improves gasoline quality and creates flexibility in gasoline production.
- Ethanol use is a cost-effective way to increase gasoline octane and to replace more expensive gasoline components.
- Ethanol contributes to transport decarbonization and air quality improvement.
- There are opportunities across Europe to increase the ethanol blend level and implement new policies on the use of gasoline-ethanol blends.

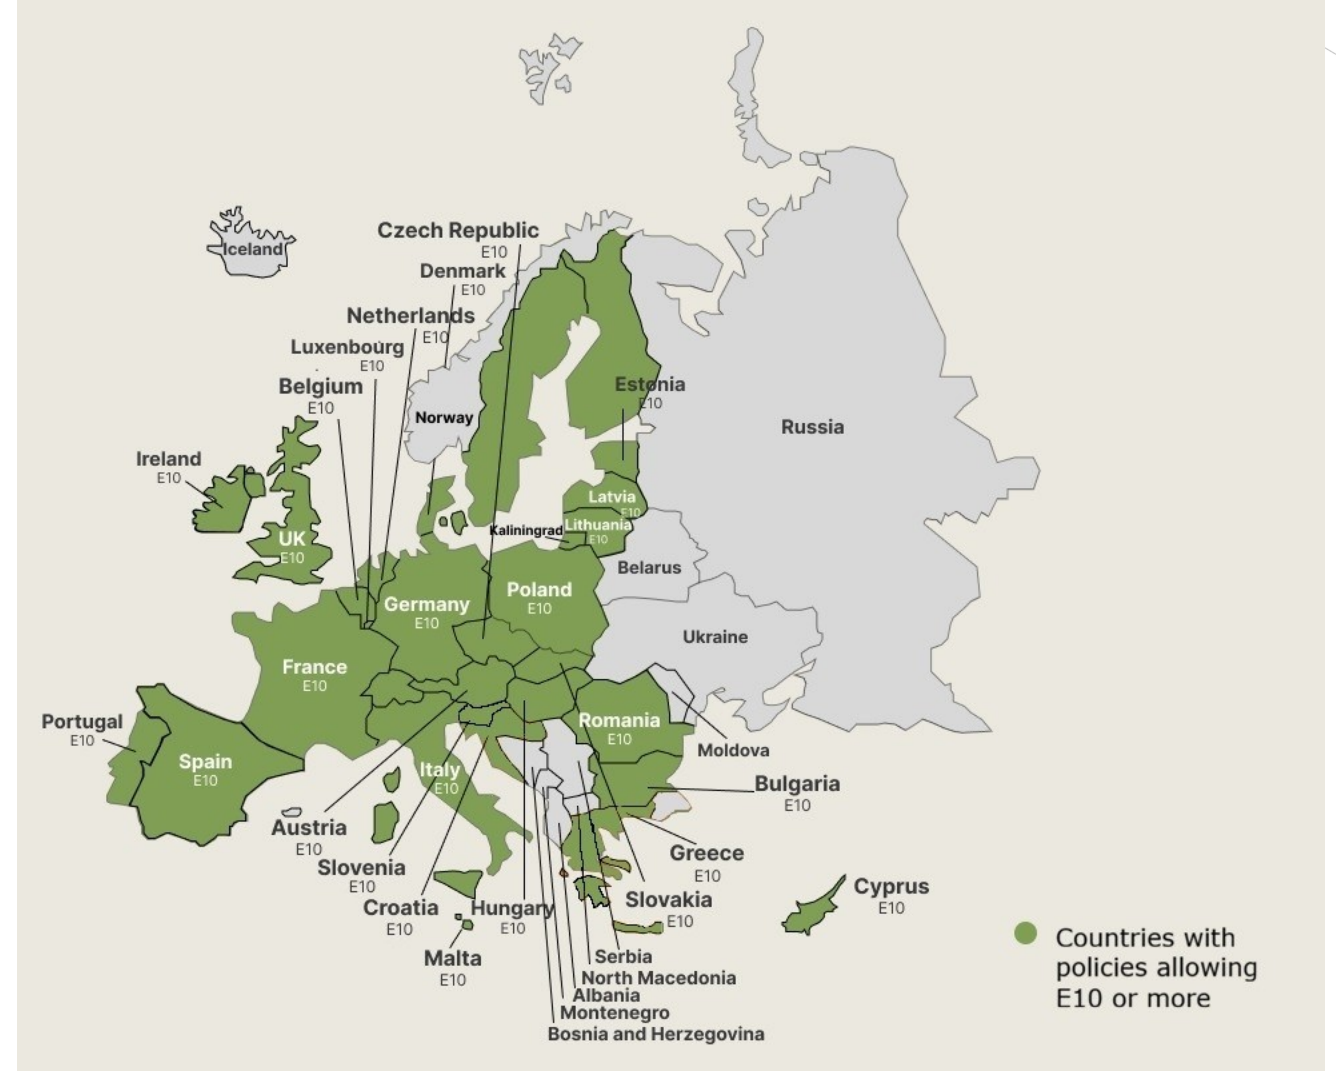

Twenty eight countries with potential and additional use of ethanol were studied: 1) Gasoline market profiles; 2) Optimization of gasoline blends with ethanol and, 3) Environmental impact of gasolines blended with ethanol.


Ethanol Gasoline Blending in Poland



In 2025, gasoline consumption in Poland was 8,220 million liters (2,172 million gallons) and growth rate was 3.31%. Gasoline production and net imports were 6,532 and 1,599 million liters (1,726 and 422 million gallons) correspondingly. Poland complies with the European gasoline standards and offers two main grades: RON 95 and RON 98 with an average octane of 95.2 RON.


In 2025, ethanol consumption in Poland was 659 million liters (174 million gallons) representing 8% of gasoline demand. Ethanol production and Net Imports were 560 and 99 million liters (148 and 26 million gallons) correspondingly. Ethanol sources are Corn 57% and Cereals 43%.

Gasoline Demand in Poland

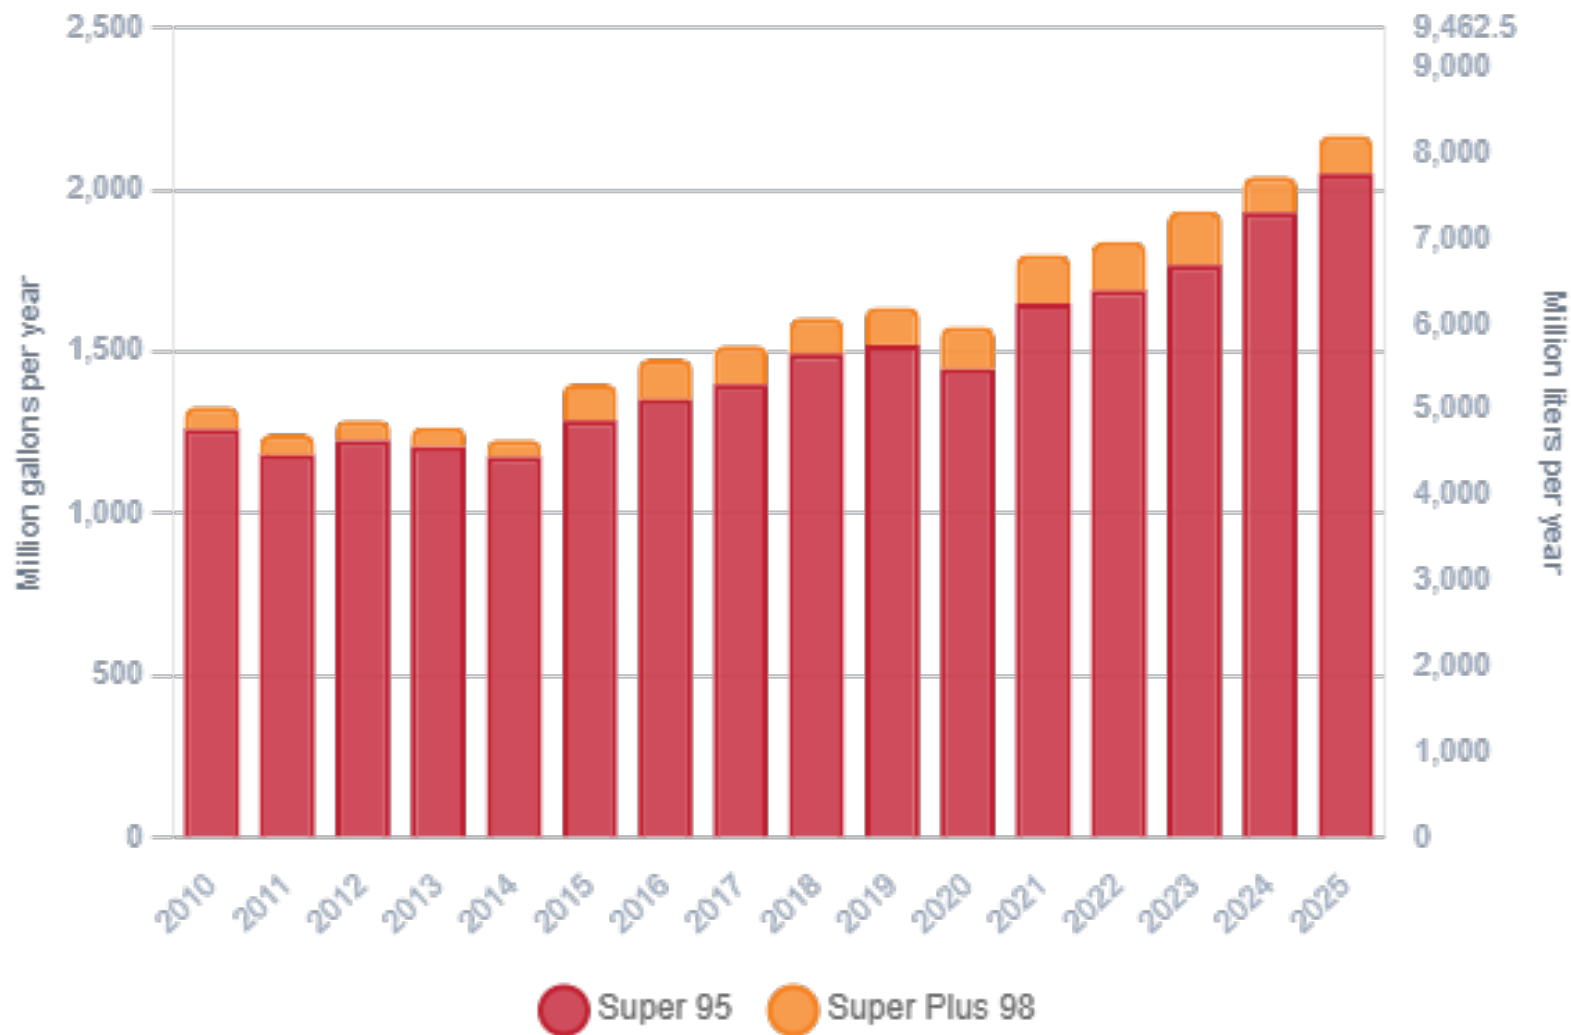


Source: Eurostat

Gasoline Production in Poland

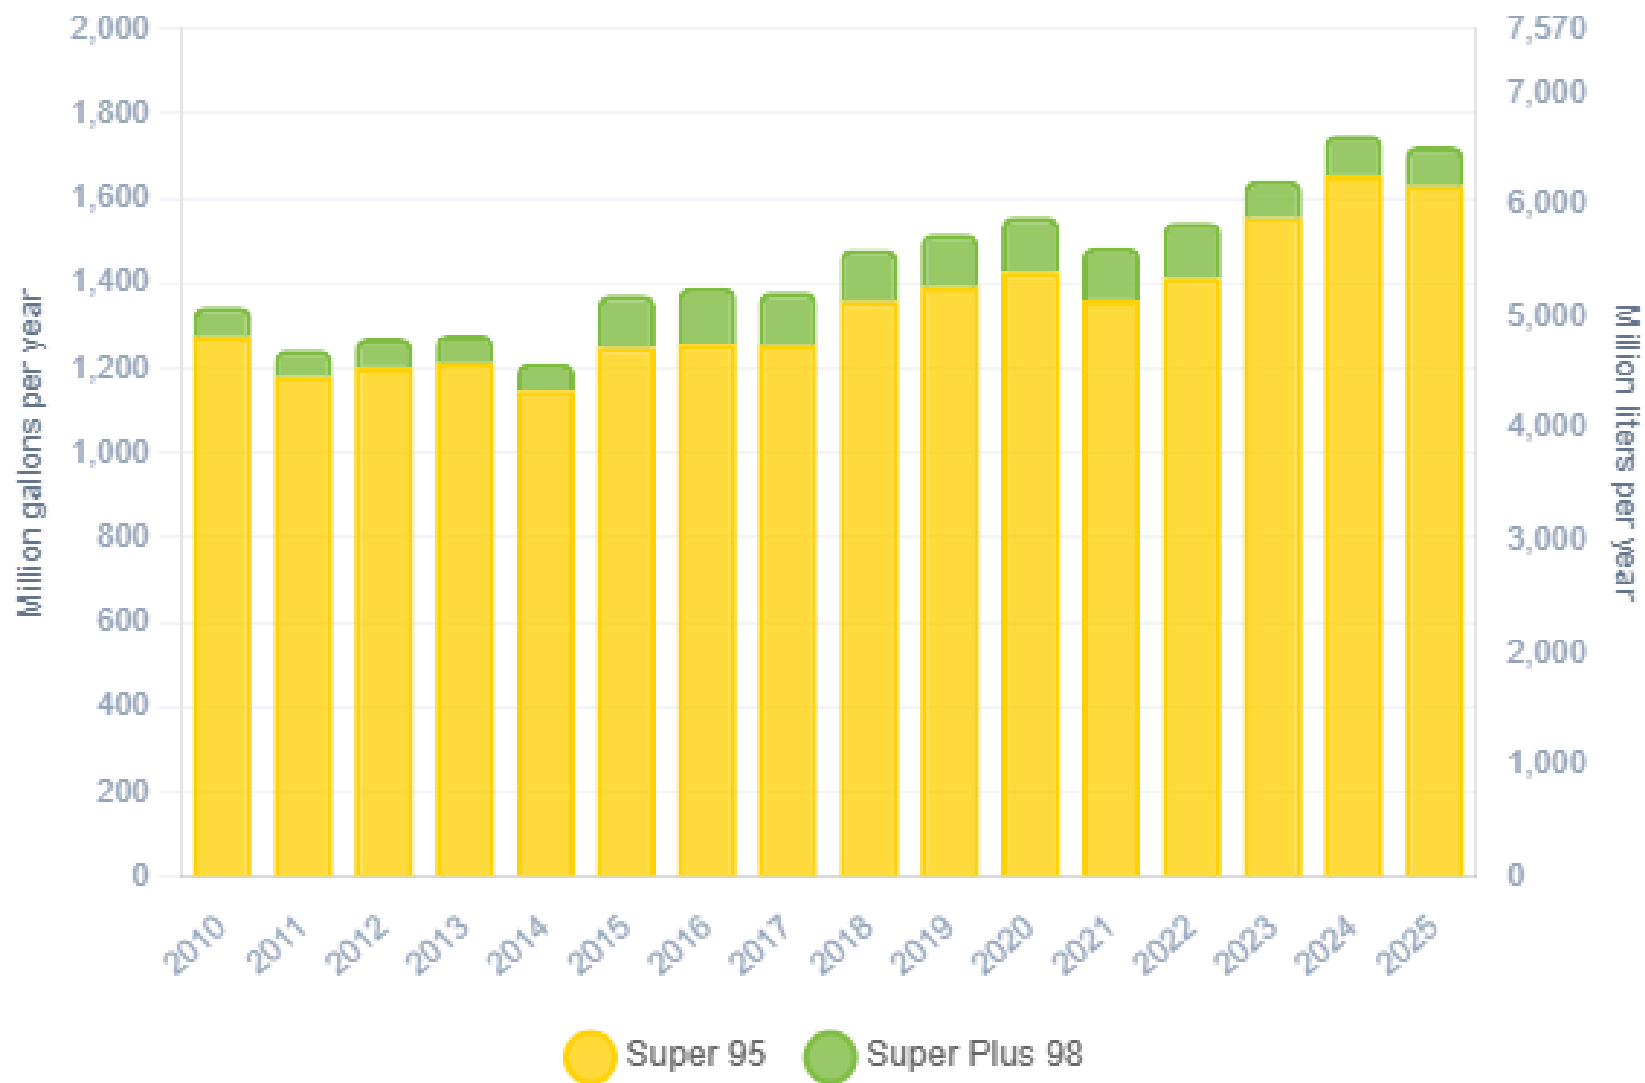


Source: Eurostat

Gasoline Imports in Poland

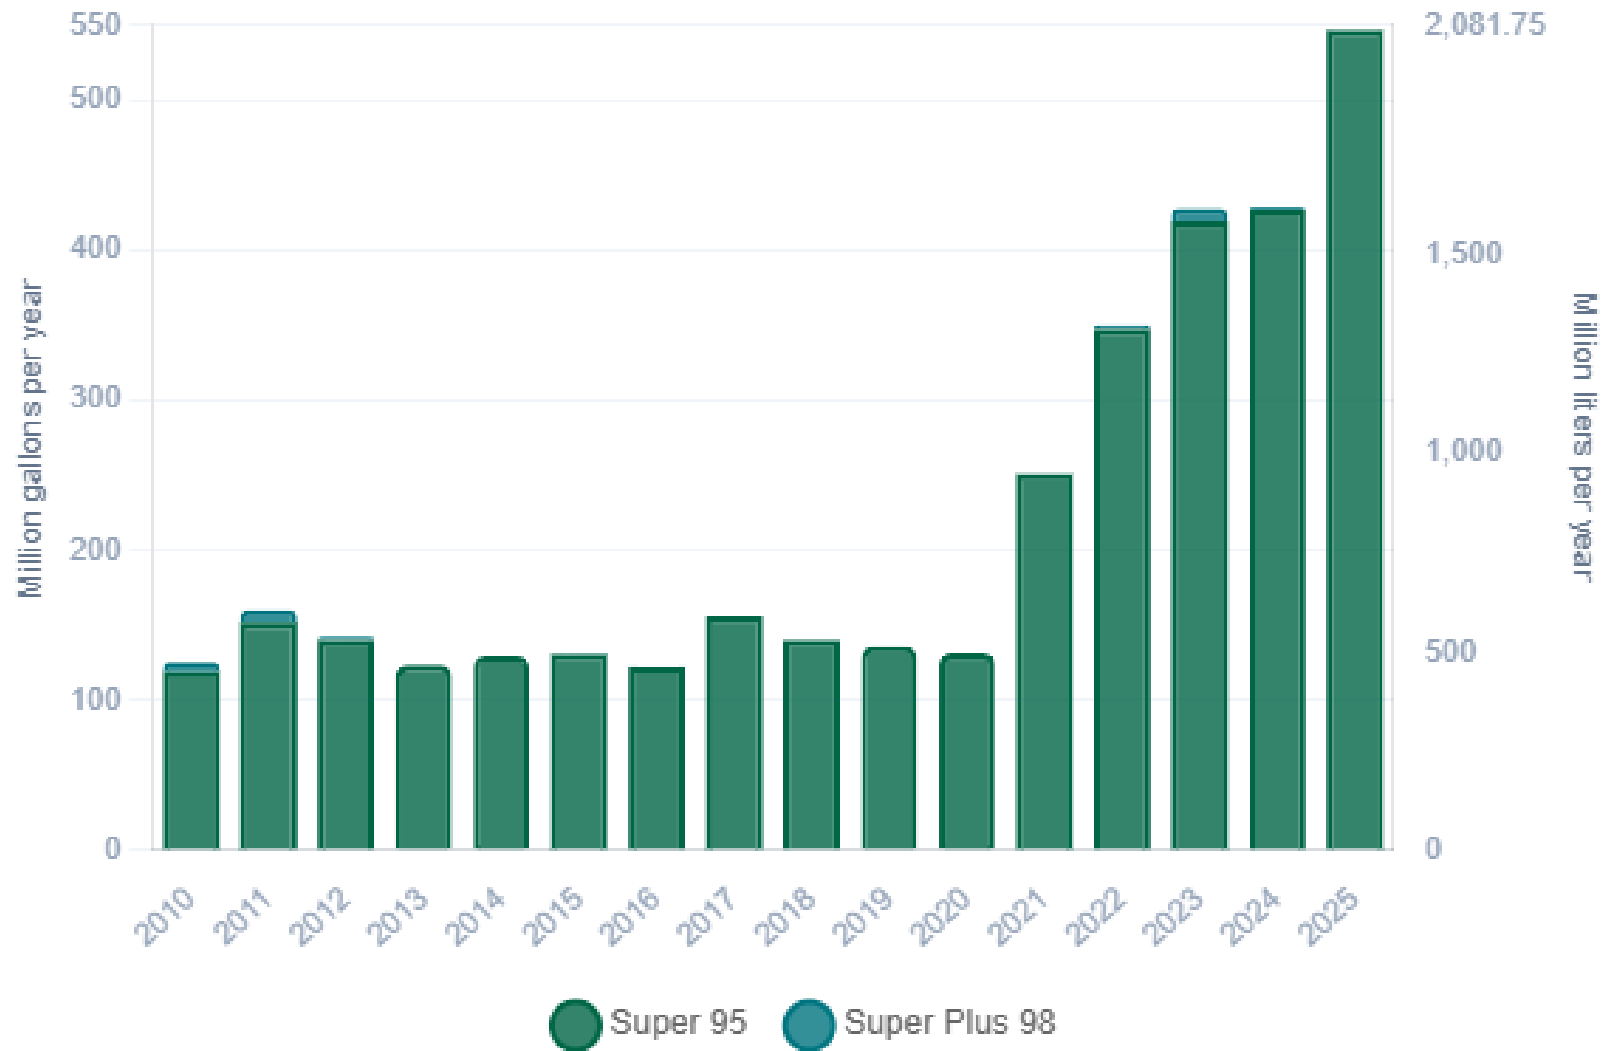


Source: Eurostat

Gasoline Exports in Poland

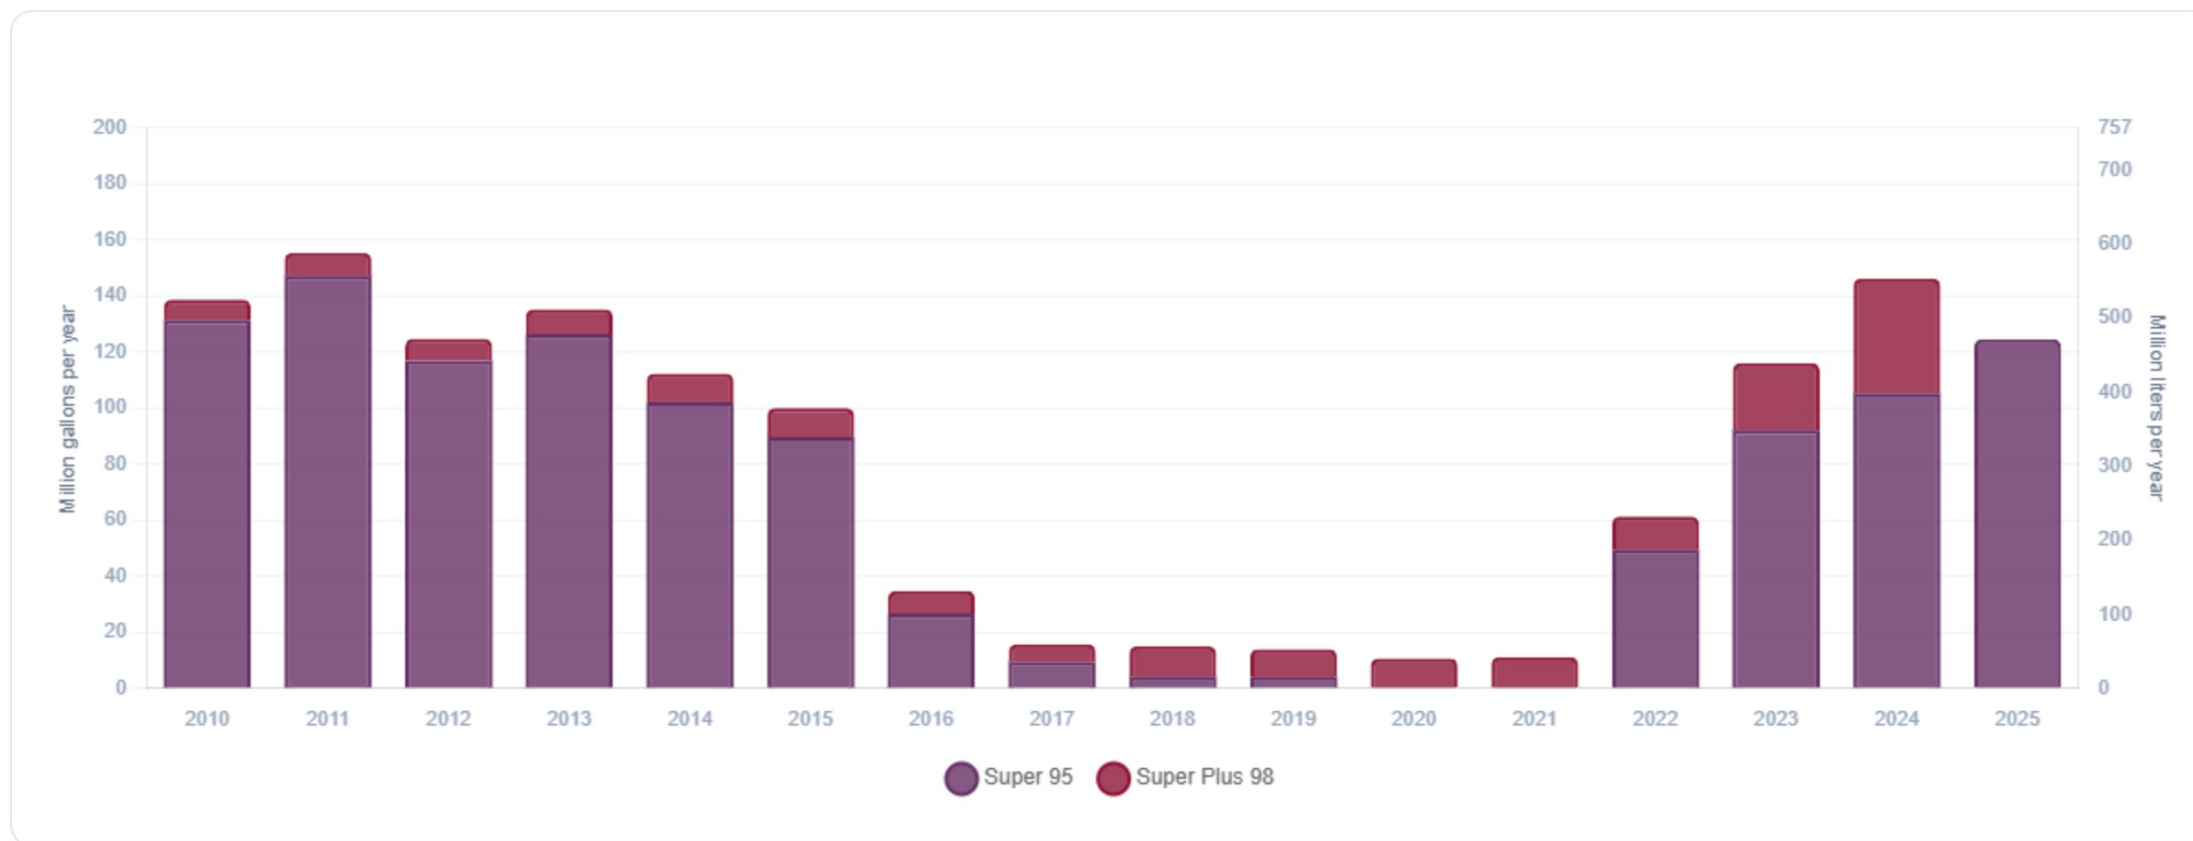


Source: Eurostat

Ethanol Balance in Poland

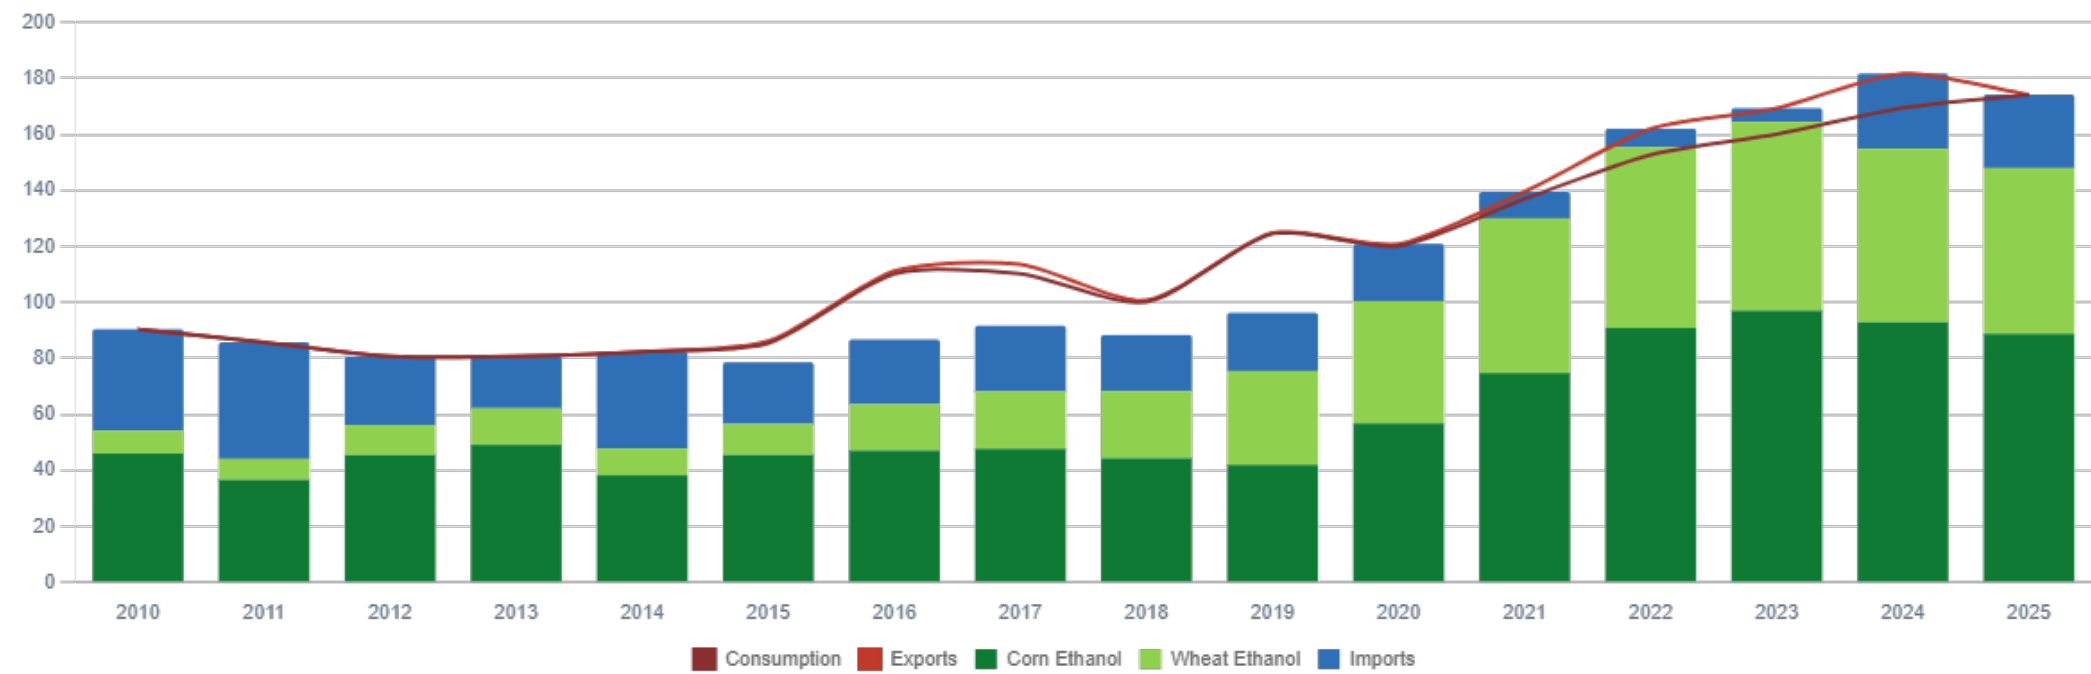

Source: Eurostat

Gasoline Quality in Poland




Name	EN 228:2025 (Euro 6); Country Level Fuel Ordinances							
Implementation Date	2025							
Applicability	All EU Contries + UK							
Grade	RON 95 E5		RON 95 E10		RON 98 E5		RON 98 E10	
	Min	Max	Min	Max	Min	Max	Min	Max
RON	95.0		95.0		98.0		98.0	
MON	> 85	> 88	> 85	> 88	> 85	> 88	> 85	> 88
AKI								
Benzene (%vol)	< 1							
Aromatics (% vol)	< 35							
Olefins (%vol)	< 18							
Lead (g/L)	< 0.005							
Manganese (mg/L)	< 2,0							
Sulfur (ppm)	10.0							
Oxygen (%w)*	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7	< 2,7	< 3,7
Ethanol (%vol)	< 5	< 10	< 5	< 10	< 5	< 10	< 5	< 10
PVR 37.8°C (psi)	<> 45 - 100 kPa in 6 Volatility Classes							
Overall Biofuels (%cal)	9.2							
Advanced Biofuels (%cal)	-							
Bioethanol in Gasoline Sales (%cal)	4.6							
GHG Emission Reduction (%)	-							

* Methanol 3%, Iso-propyl alcohol 12%, Ter-butyl alcohol 15%, Iso-butyl alcohol 15%, Ethers +5 Carbons 22%, Other Oxygenates 15%

Source: European Commision


Gasoline Component Blending in Europe



Gasoline is a blend of a base gasoline and other components. Each component provides different properties to the final blend, for example, isomerates, alkylates and butanes increase the octane. The components commonly used in Europe are:

- Catalytic Gasoline
- Light Primary Naphta
- Heavy Primary Naphta
- Reformate
- Isopentane
- Alkylate
- Isomerate
- Hydrocracked Gasoline
- Coker Naphta
- n-Butane
- MTBE
- ETBE
- TAME
- Aromatics

Source:
Faro90

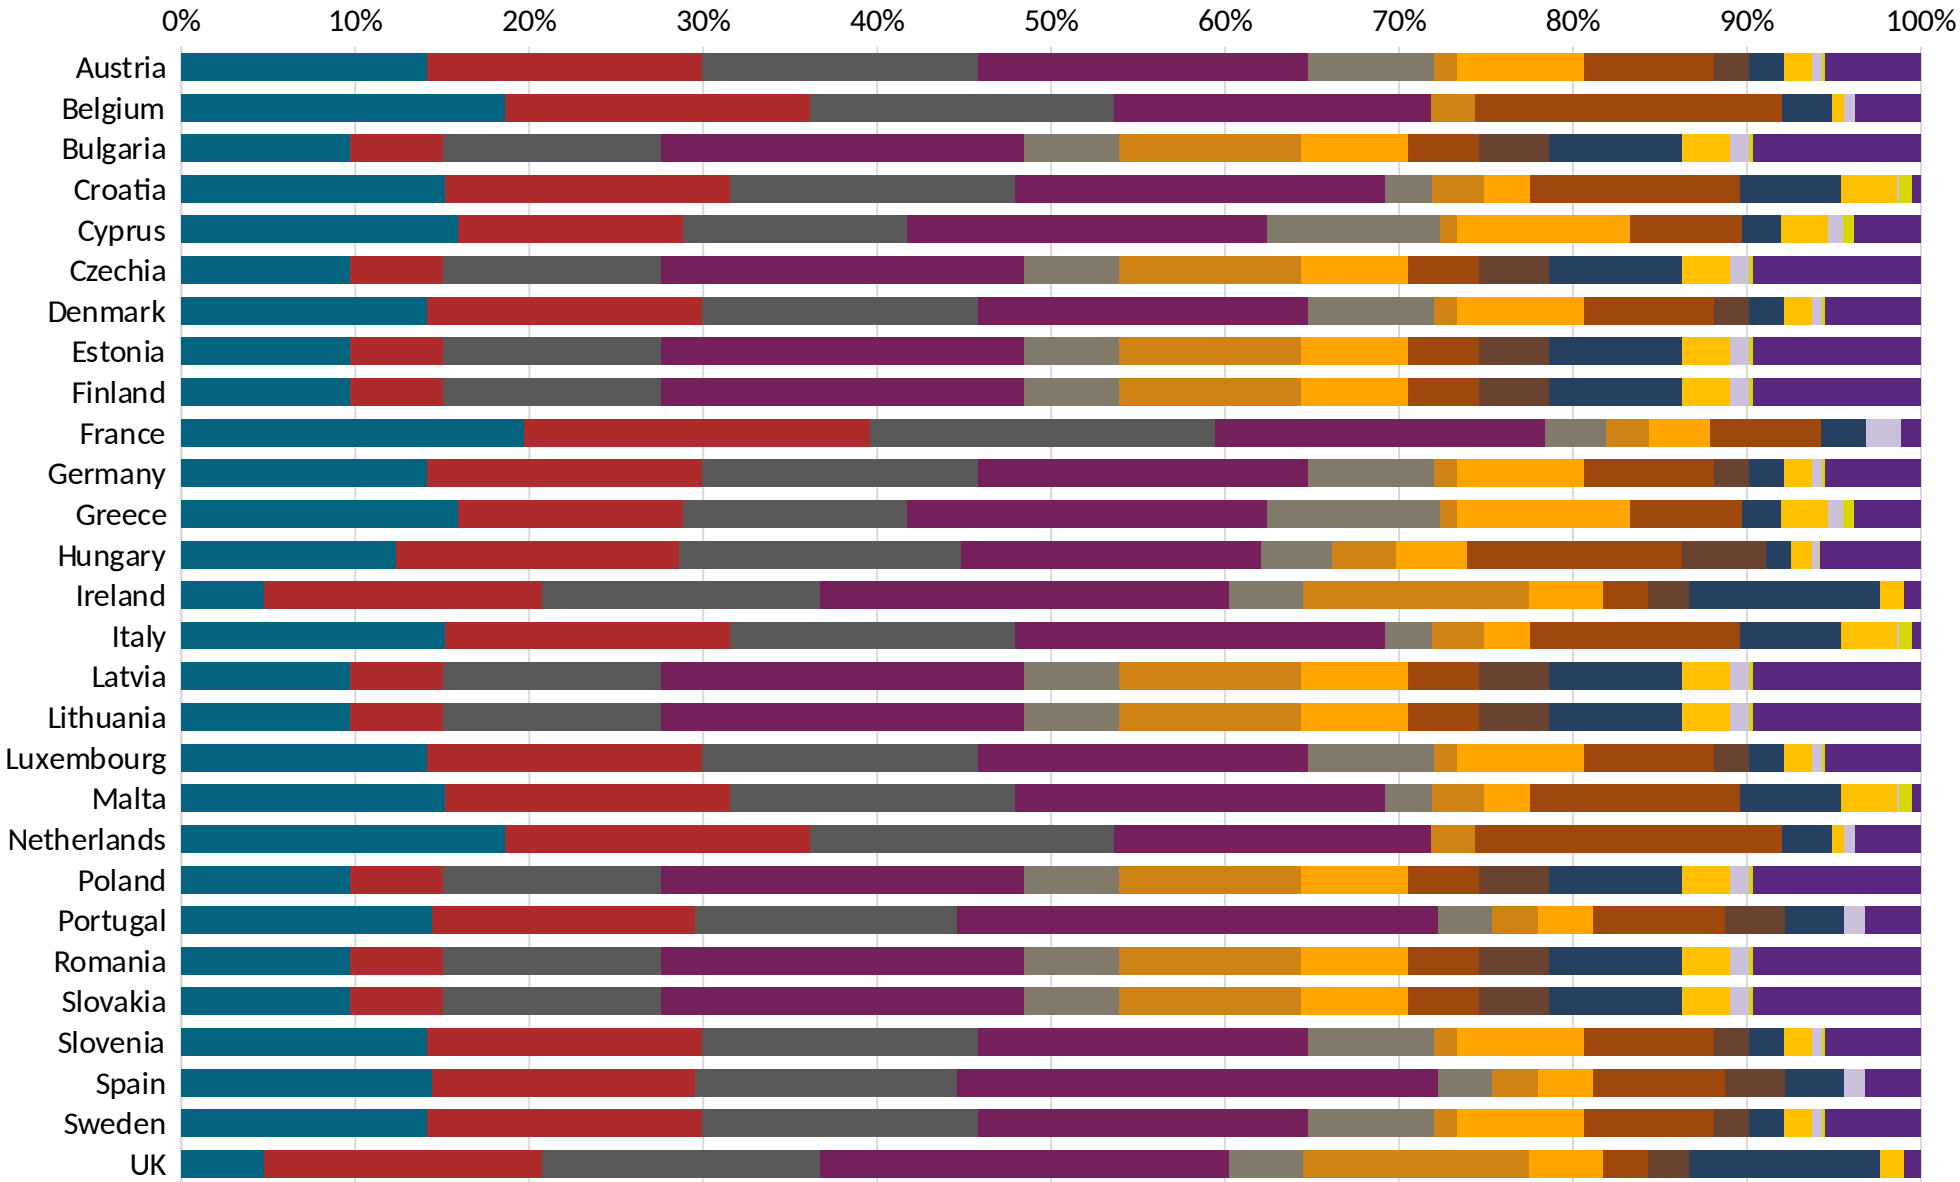


Gasoline Blending Optimization

In some parts of the world, ethanol is added to gasoline as a blending component. The advantages of ethanol include that it is a renewable fuel made of biomass; that it is an octane booster that helps to dilute sulfur; and that it allows the fulfillment of environmental objectives. To determine the optimal components to be blended with ethanol, a **blending model** was used. This model selects the components to add in the gasoline/ethanol blend based on:


- Components prices,
- Properties each component affects,
- Quality parameters by country, and
- Component availability by country.

Through iterations, the model obtains the %v/v of the components to be blended with 10%, 15%, 20%, 25% and 30% of ethanol, in such a way that the final blend complies with the required properties of a finished gasoline by country.


The blending model uses gasoline component spot average prices 2025 and provides fuel prices that do not include country distribution costs, local taxes and subsidies and import or gas station margins.

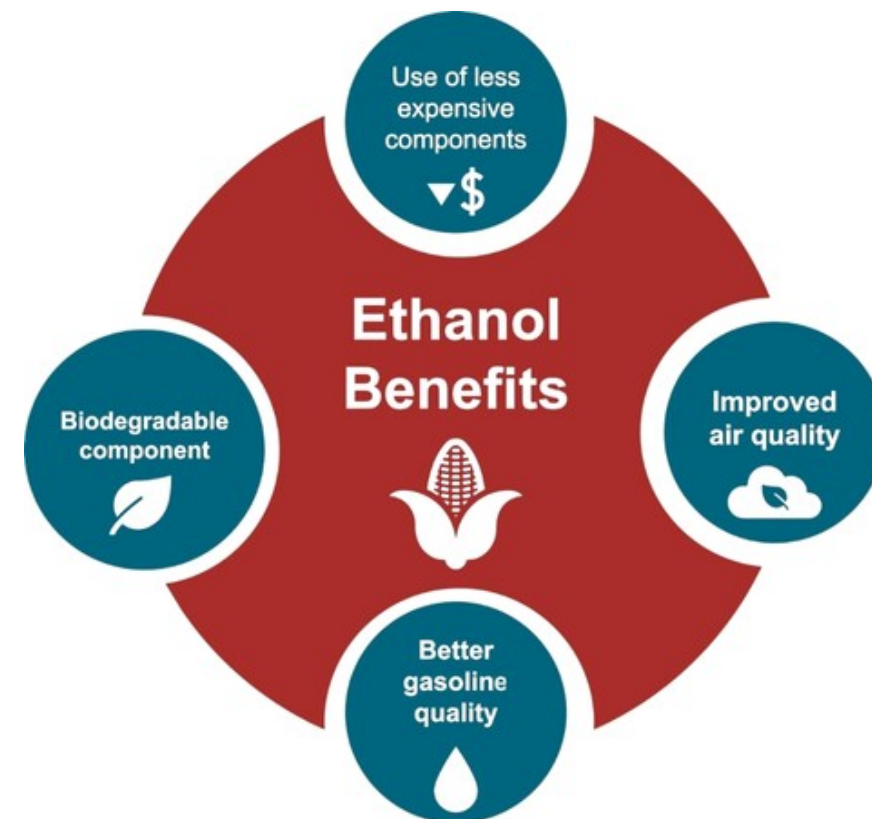

Poland Available Blending Components

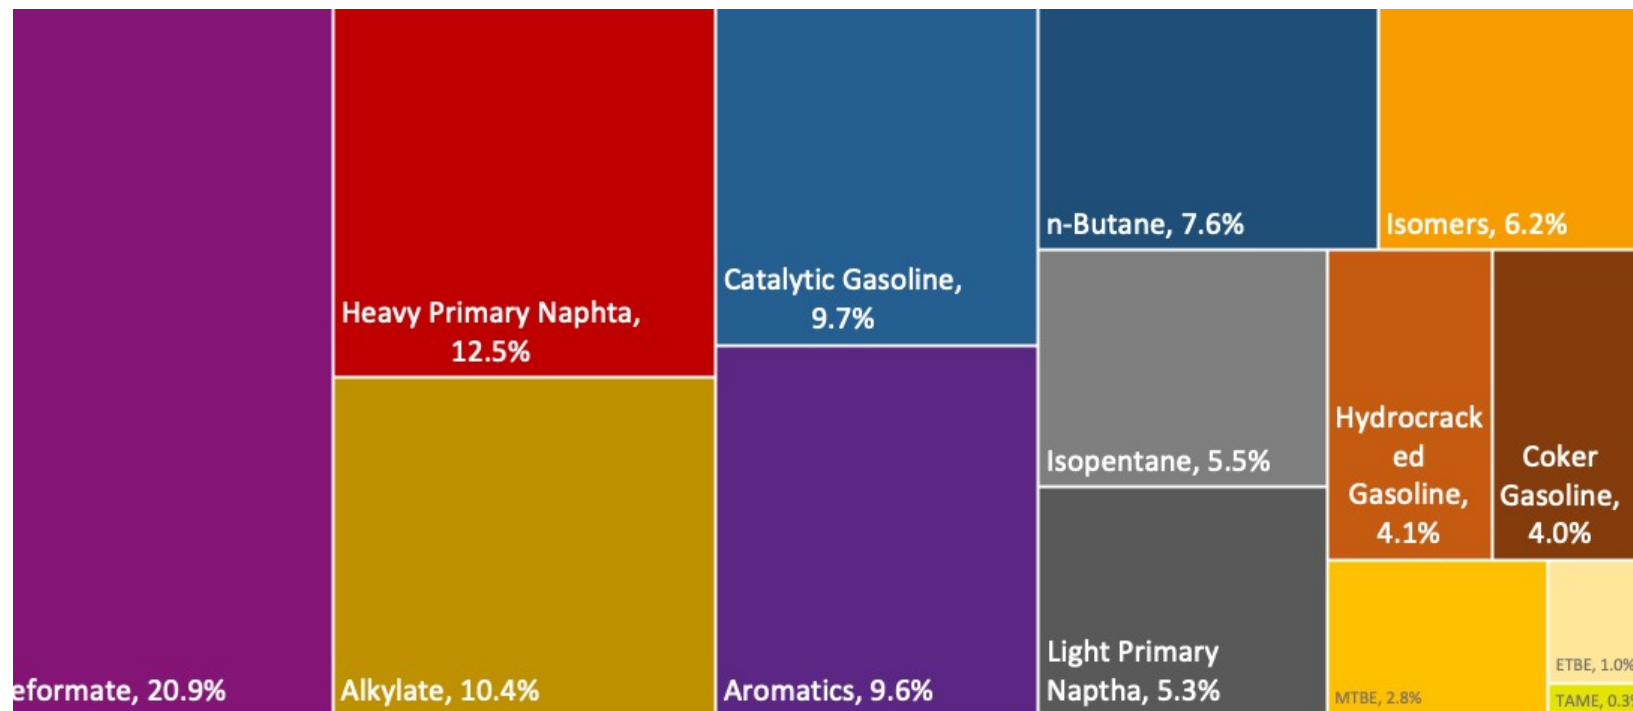



Poland – Gasoline 95 – Constant Octane

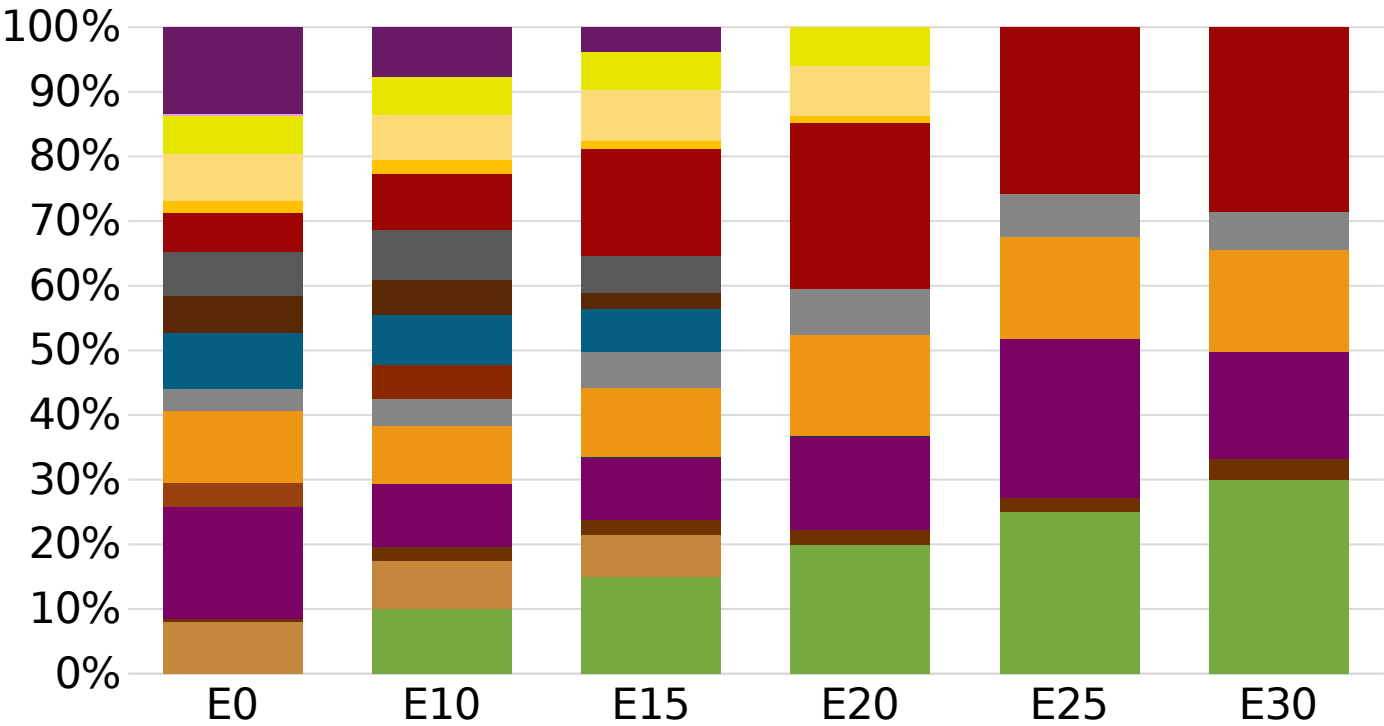

Average CIF 2025
Prices

Octane (RON)	95.0	95.0	95.0	95.0	95.0	95.8
Price (US\$/gal)	\$ 2.081	\$ 1.943	\$ 1.843	\$ 1.728	\$ 1.682	\$ 1.629



Poland - Gasoline 98 - Constant Octane

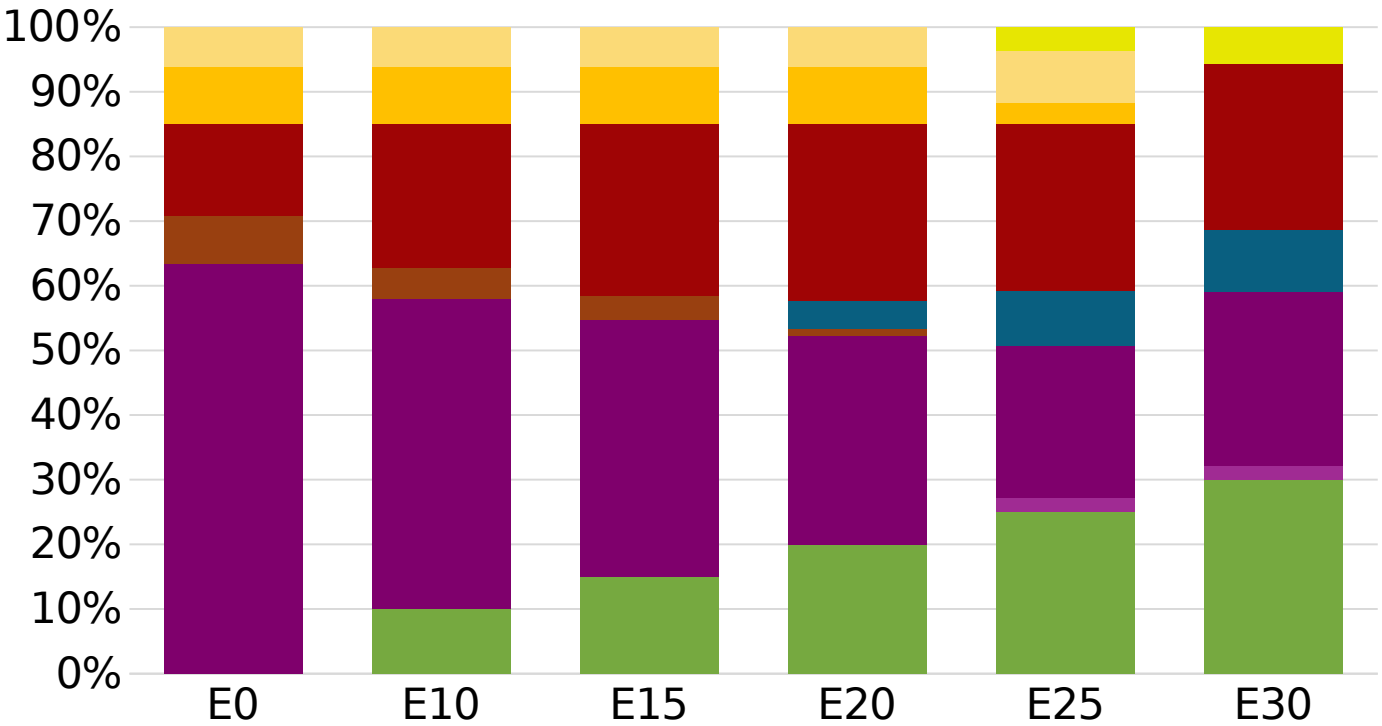

Octane (RON)	98.0	98.0	98.0	98.0	98.0	98.0
Price (US\$/gal)	\$ 2.101	\$ 1.984	\$ 1.915	\$ 1.843	\$ 1.778	\$ 1.728

Average CIF 2025
Prices



Poland – Gasoline 95 – Increased Octane

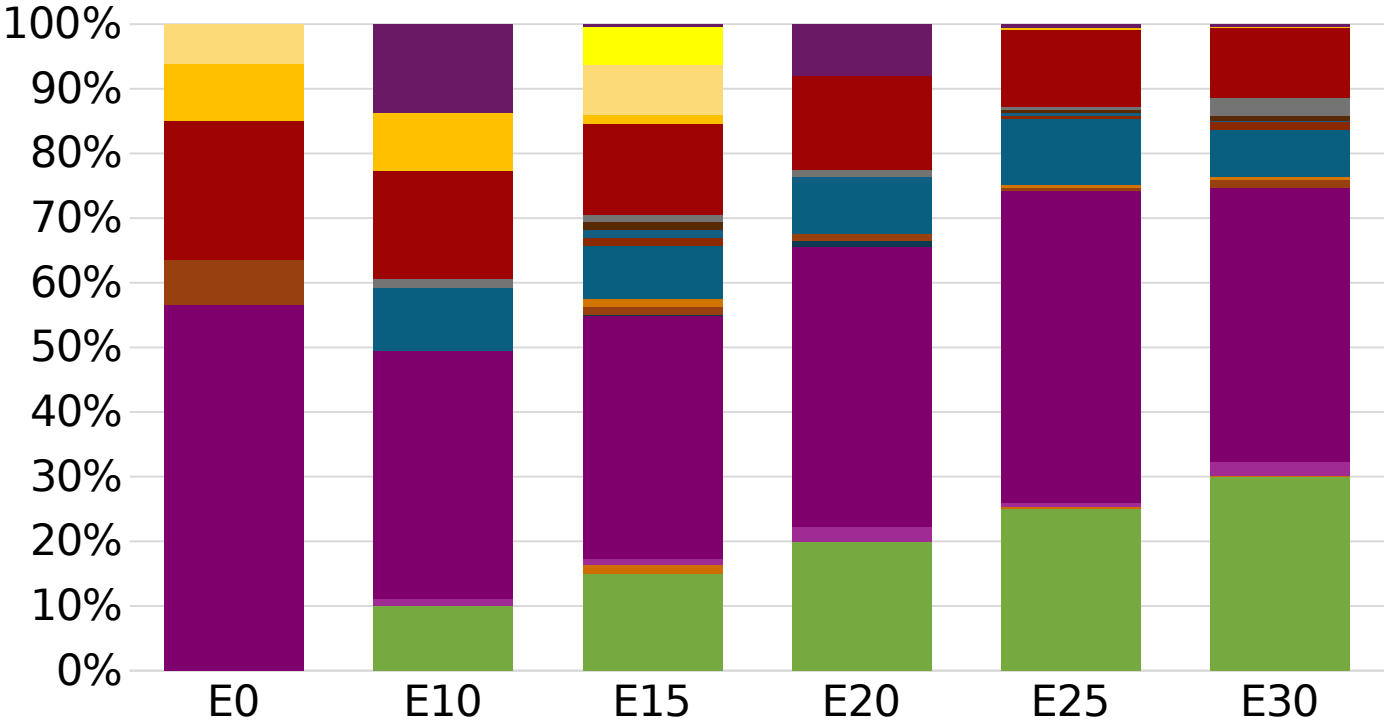

Average CIF 2025
Prices

Octane (RON)	95.0	96.2	98.3	98.7	100.5	101.8
Price (US\$/gal)	\$ 1.969	\$ 1.969	\$ 1.969	\$ 1.969	\$ 1.969	\$ 1.969

Poland – Gasoline 98 – Increased Octane

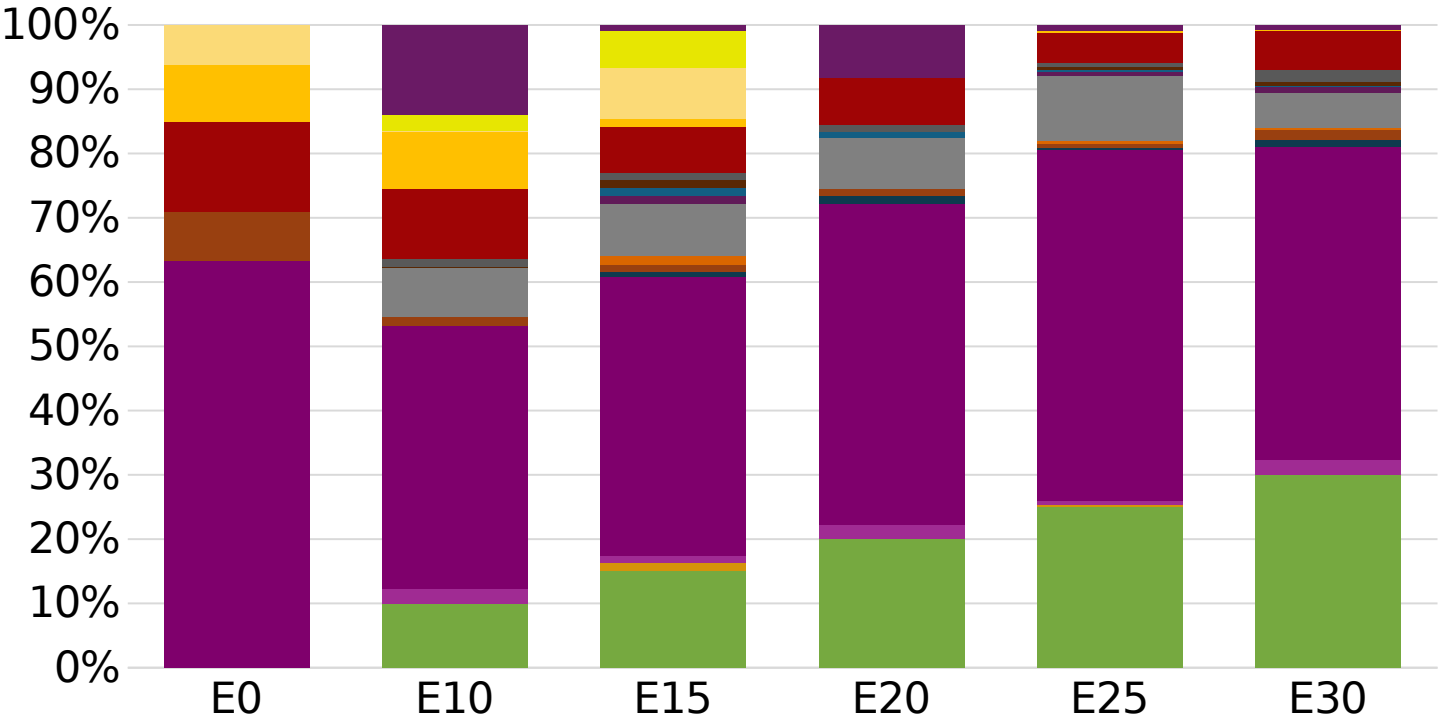

Average CIF 2025
Prices

Octane (RON)	98.0	99.0	100.9	101.2	102.8	104.1
Price (US\$/gal)	\$ 2.101	\$ 2.101	\$ 2.101	\$ 2.101	\$ 2.101	\$ 2.101

Source:
Faro90

Vehicle Emission Impact for Ethanol Gasoline Blending

The model used in this analysis takes as a reference the [International Vehicle Emissions Model \(IVE\)](#).

The model uses the Base Emission Rates from IVE model, as well as its Adjustment Factors based on:


- Vehicle technology (cars, trucks, buses, motorcycles),
- Vehicle fleet average age,
- Average traveled distance per vehicle by country, as well as
- Geographical and climatic conditions (altitude, humidity, temperature).

Emissions of criteria pollutants, toxic pollutants, and greenhouse gases (GHG) were calculated and calibrated with emission inventories, using real gasoline quality data. The reduction rates for gasoline/ethanol blends were obtained from various sources (IPCC, US Grains, among others).


Emission estimations for different pollutants for gasoline and gasoline/ethanol blends (10%, 15%, 20%, 25% and 30% ethanol) were determined using the IVE Model. A comparison between the results and the European (Euro 6) requirements is made. Results are also compared with real emissions of the United States vehicle fleet*.

**Source: Bureau of transportation statistics.*

Main Results

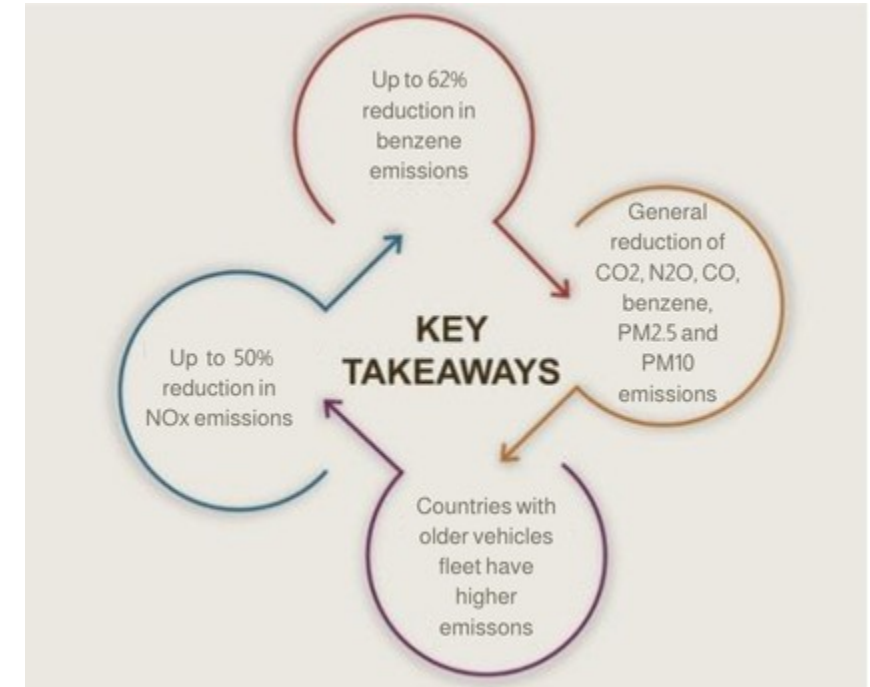

Gasoline Vehicle Fleet - Poland







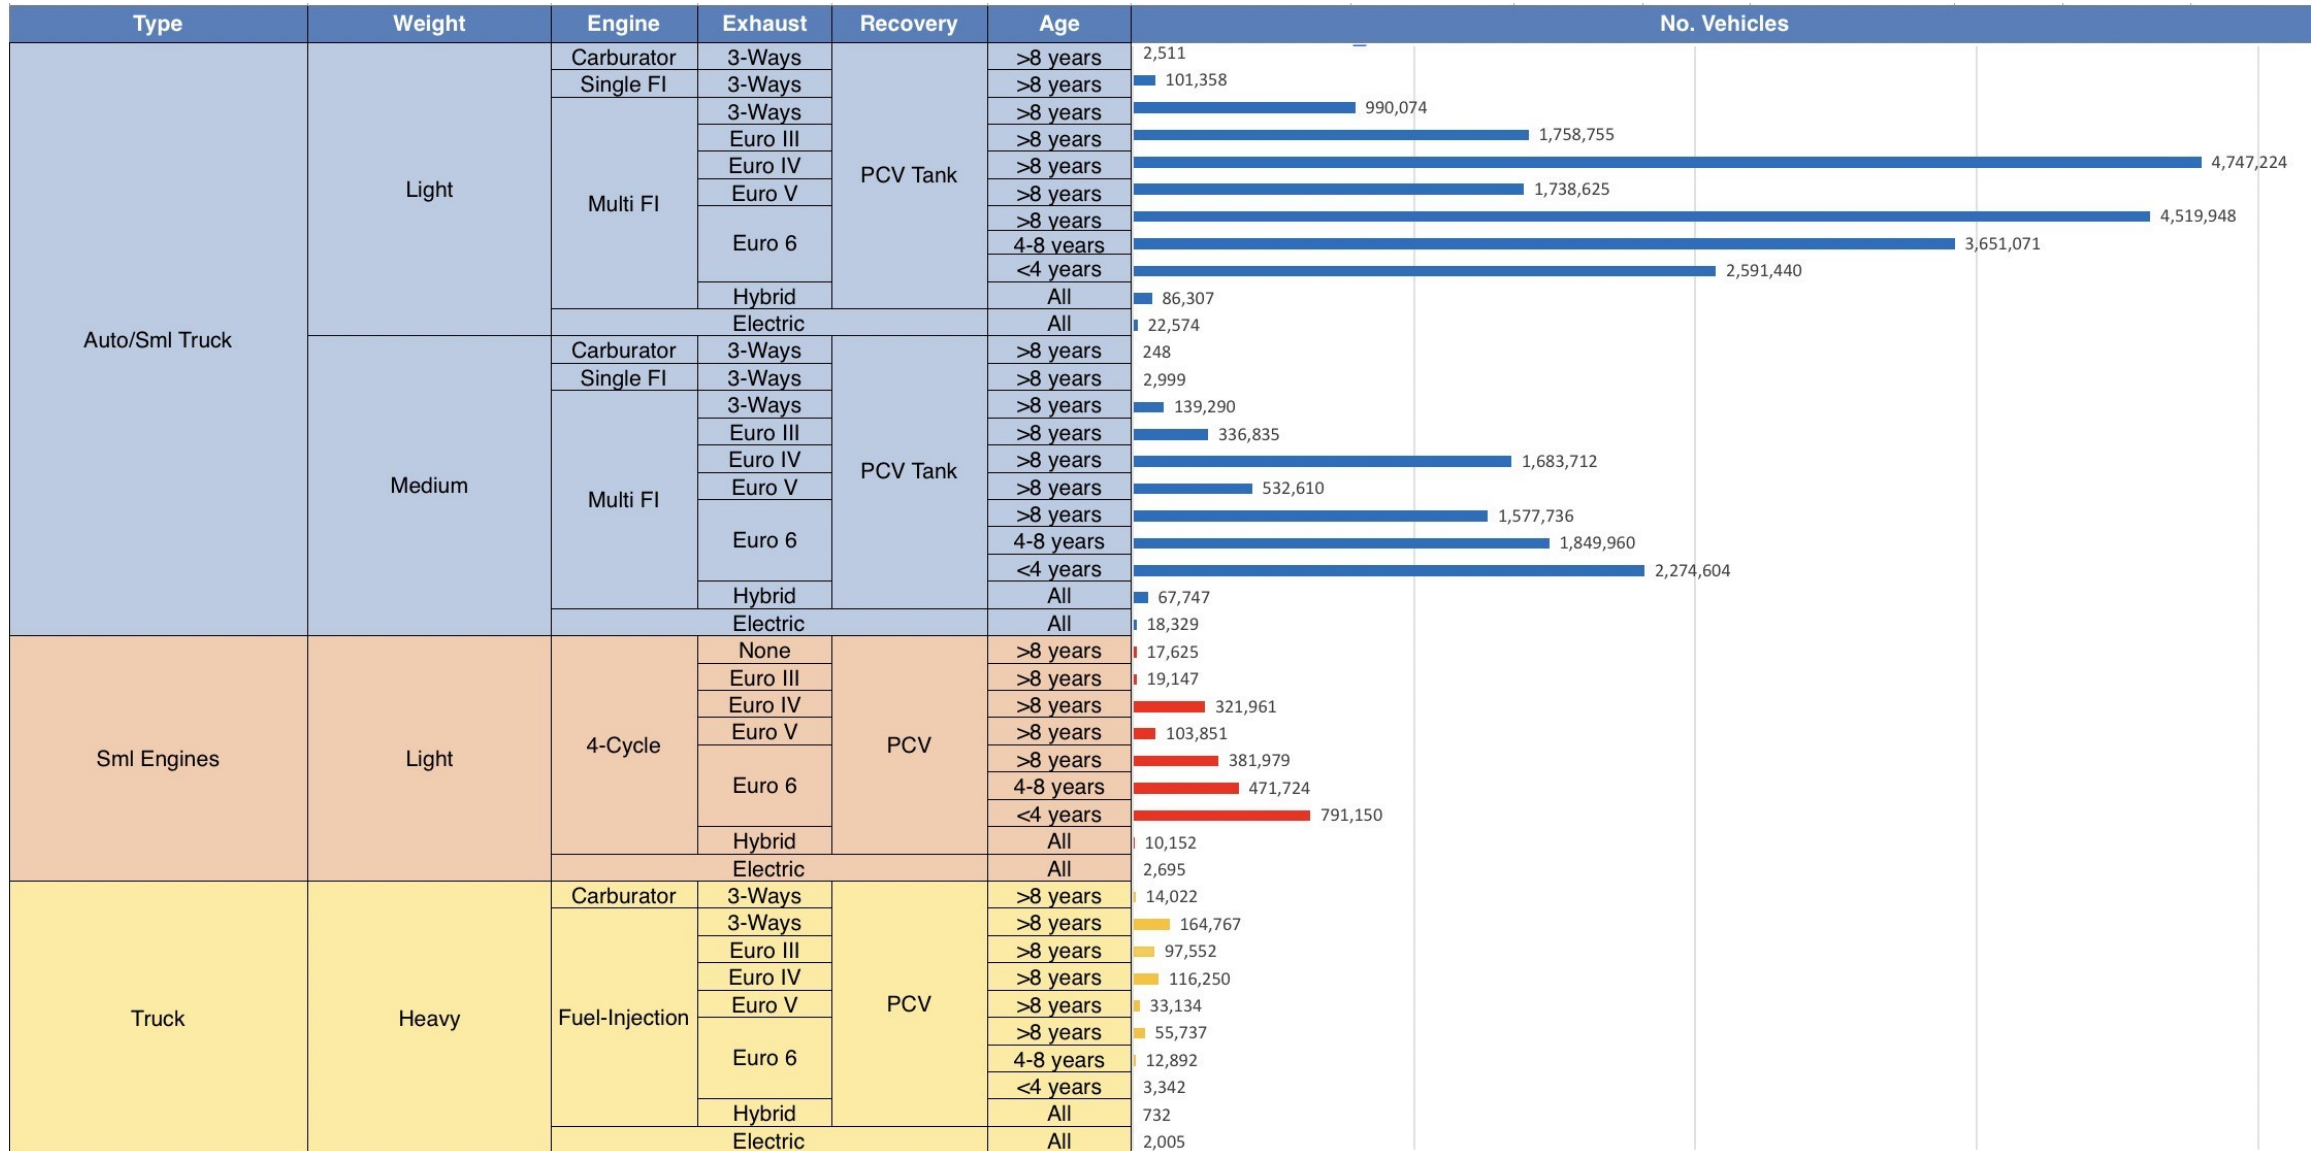


Vehicle Fleet: 31,314,673
Gasoline Vehicle Fleet: 11,384,568

Source: Eurostat, ACEA

Poland – Vehicular Emissions

TIER III BIN 125 United States
Euro 6 Standard

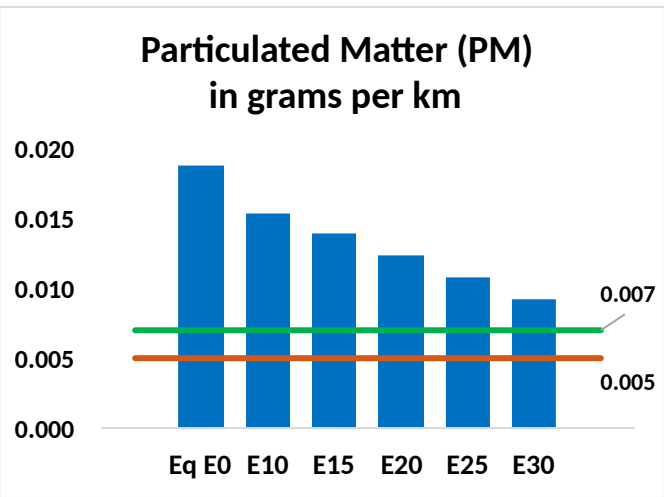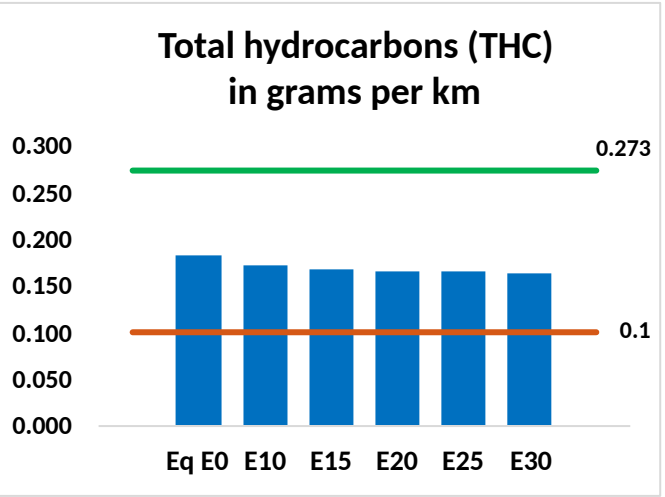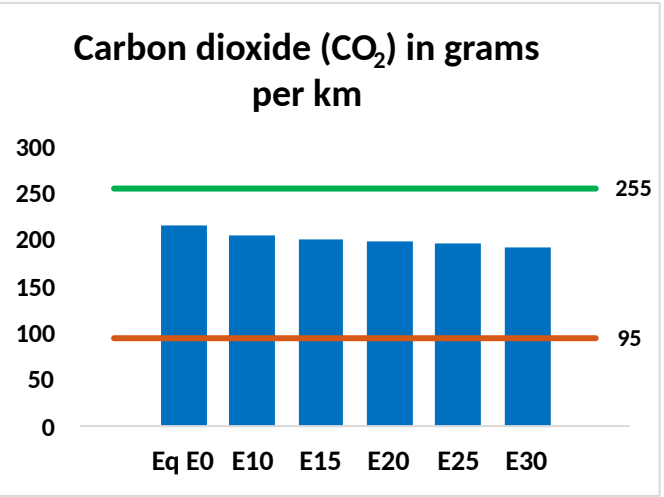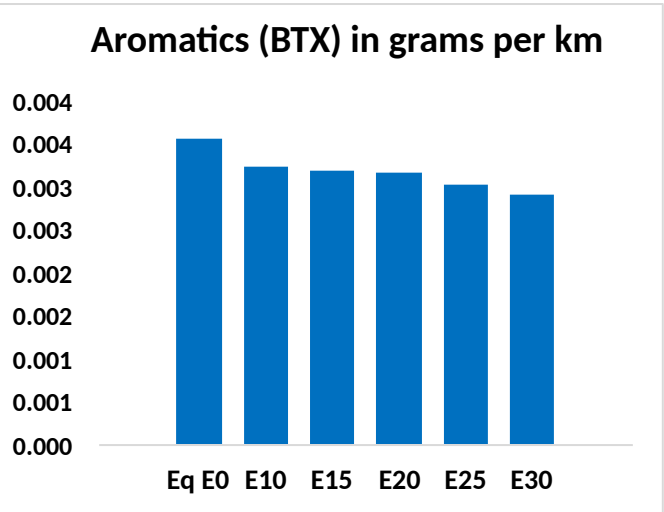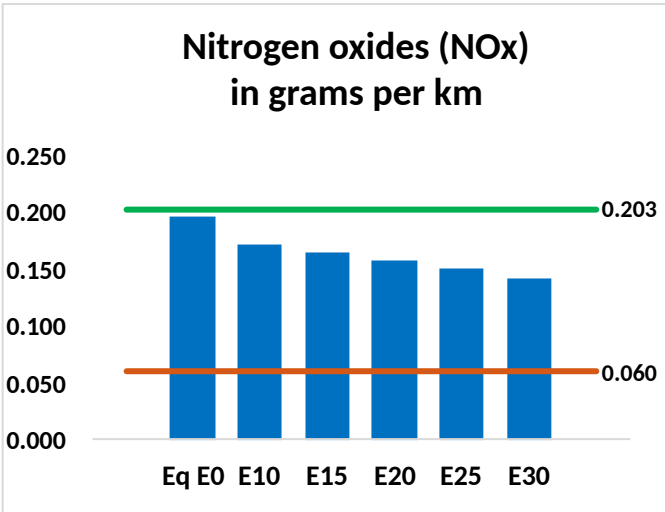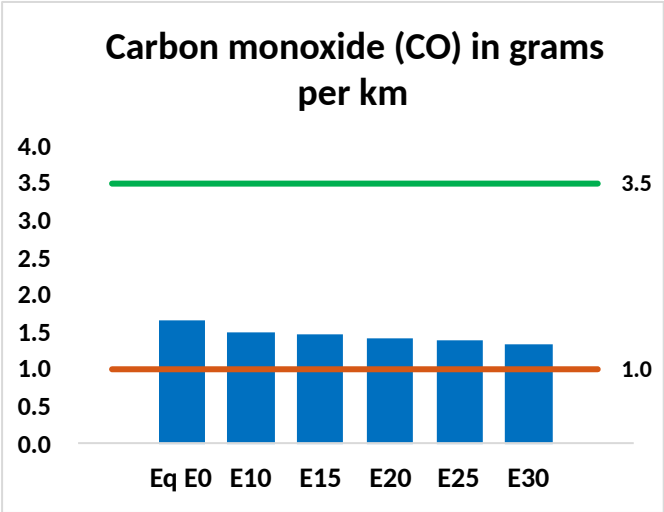

Poland – Vehicular Emissions

Vehicular Fleet Emissions (kg/day)	Eq E0	E5	E10	E15	E20	E25	E30	Reduction (%)	
								E10	E20
CO	571,190	545,994	520,797	503,802	488,379	477,027	461,847	-9%	-14%
CO2	74,492,027	72,576,518	70,767,426	69,344,628	68,640,572	68,234,765	66,977,002	-5%	-8%
VOC	63,270	61,351	59,432	58,434	57,694	57,205	56,271	-6%	-9%
NOx	68,371	63,129	59,506	57,647	54,666	52,323	49,568	-13%	-20%
SOx	854	789	725	670	618	561	501	-15%	-28%
NH3	24,969	24,722	24,475	24,591	24,868	25,062	25,224	-2%	0%
N2O	1,159	1,152	1,148	1,153	1,177	1,190	1,204	-1%	2%
CH4	15,302	15,302	15,302	15,531	15,868	16,158	16,434	0%	4%
Lead	-	-	-	-	-	-	-	0%	0%
Butadiene	646	635	624	623	625	627	627	-3%	-3%
Acetaldehyde	1,296	1,487	2,182	3,324	4,528	5,174	6,114	68%	249%
Formaldehyde	3,913	3,804	4,435	5,207	5,455	6,035	6,570	13%	39%
Benzene	1,234	1,186	1,124	1,106	1,097	1,049	1,015	-9%	-11%
PM2.5	4,356	3,960	3,564	3,215	2,874	2,509	2,126	-18%	-34%
PM10	2,198	1,998	1,798	1,622	1,450	1,266	1,073	-18%	-34%


Life Cycle GHG Emissions

The Global Agenda for Climate Action calls for countries, cities and regions, businesses, and members of civil society around the world to achieve a low-carbon and climate-resilient economies in support of the Paris Agreement. Road Transportation accounts for 15% of total GHG emissions (IPCC,2023).


Ethanol gasoline blends are an internationally adopted practice that offer significant short-term benefits. Biofuels are an important solution to achieve reduction targets in the transportation sector.

Country GHG emission reductions are calculated using **RED II/III** and **GREET** life cycle emission methodologies and the **International Vehicular Emissions Model (IVE)**. Results are compared to the current country targets for 2035. Current 2025 country emission are those published by **IPCC**.



Current GHG Global Emissions Distribution

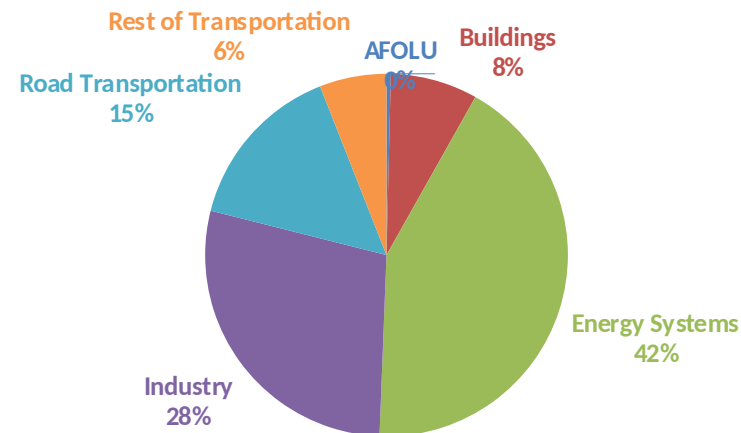

IPCC Transport Sector Sustainable Development Goals and climate policies Scenario, 2023

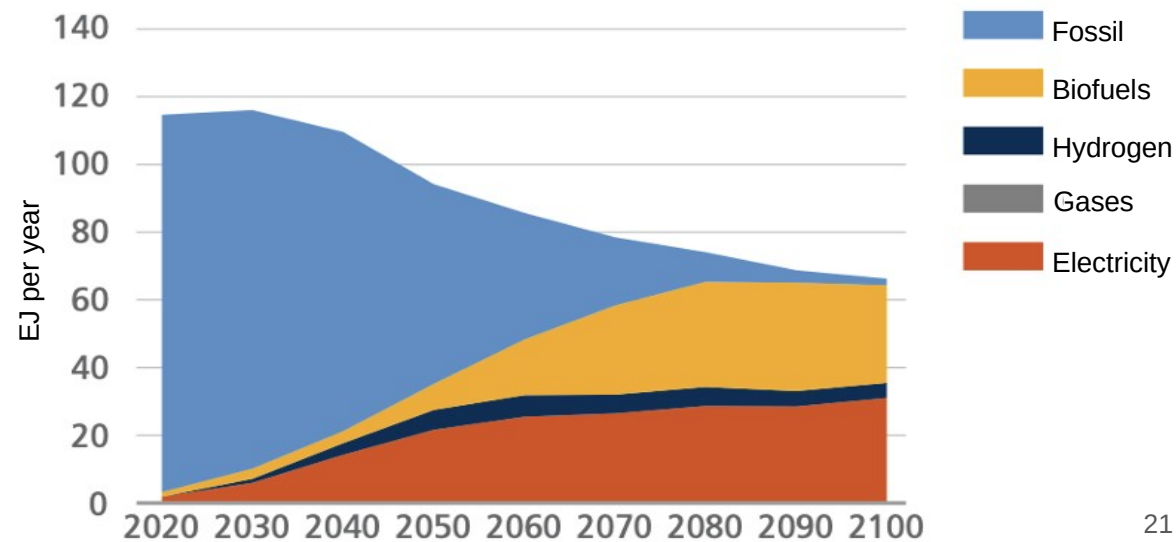

Poland – Gasoline Vehicle Fleet Life Cycle GHG Emissions

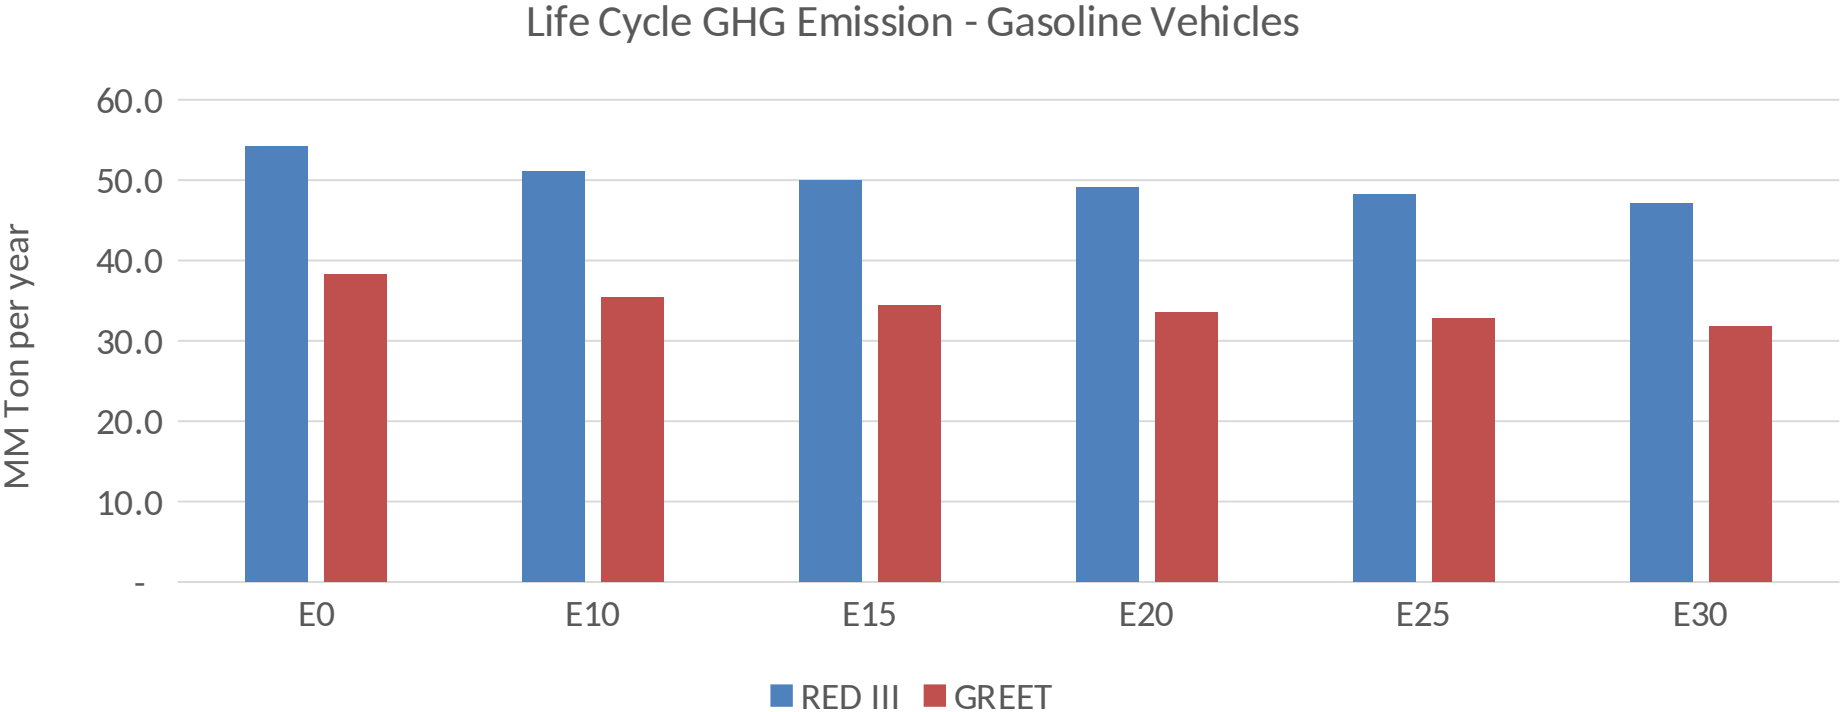

Country Emissions 2025 (MMT/año)	337.8
Target @ 2035 (MMT/year)	190.2
Delta	147.7

%Reduction vs E0	E0	E10	E15	E20	E25	E30
GREET 2024	0.0%	7.5%	10.1%	12.4%	14.3%	17.1%
RED II/III	0.0%	5.7%	7.7%	9.5%	11.0%	13.1%

% 2035 Target	E0	E10	E15	E20	E25	E30
GREET 2024	0.0%	1.9%	2.6%	3.2%	3.7%	4.4%
RED II/III	0.0%	2.1%	2.8%	3.5%	4.0%	4.8%

Source: Greet, RED II/III, IPCC, climateactiontracker.org, F90