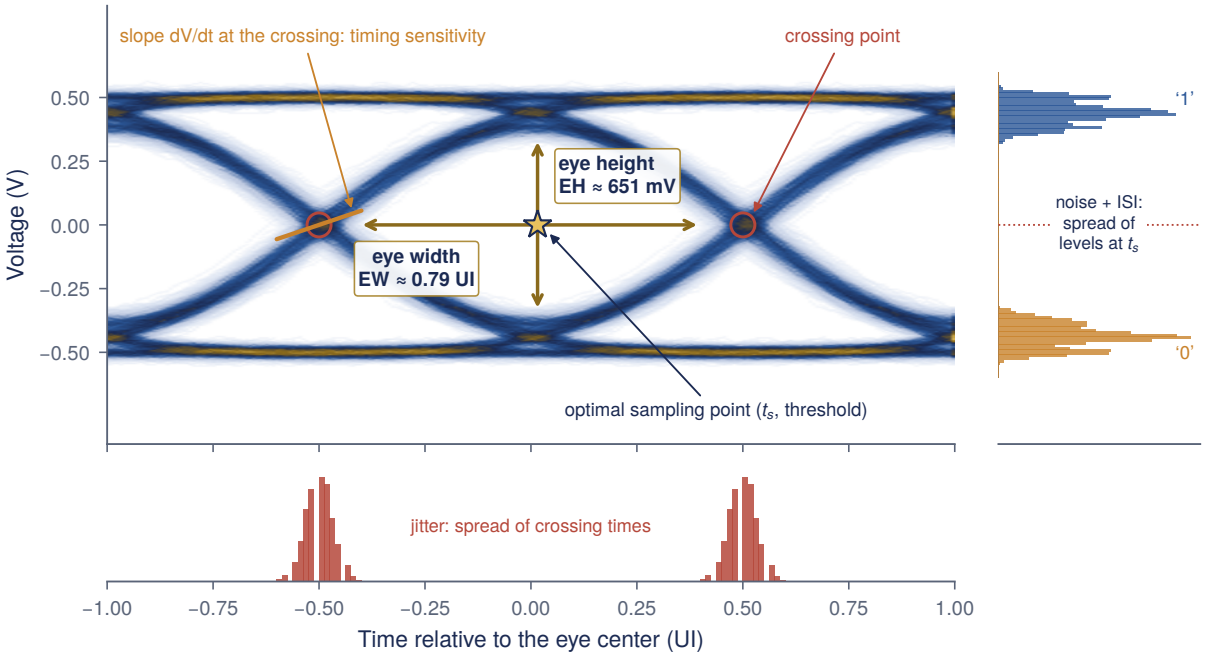

slope dV/dt at the crossing: timing sensitivity
crossing point
eye height
EH ≈ 651 mV
eye width
EW ≈ 0.79 UI
optimal sampling point (t_s, threshold)
'1'
noise + ISI:
spread of
levels at t_s
'0'
jitter: spread of crossing times
Voltage (V)
0.50
0.25
0.00
−0.25
−0.50
−1.00
−0.75
−0.50
−0.25
0.00
0.25
0.50
0.75
1.00
Time relative to the eye center (UI)