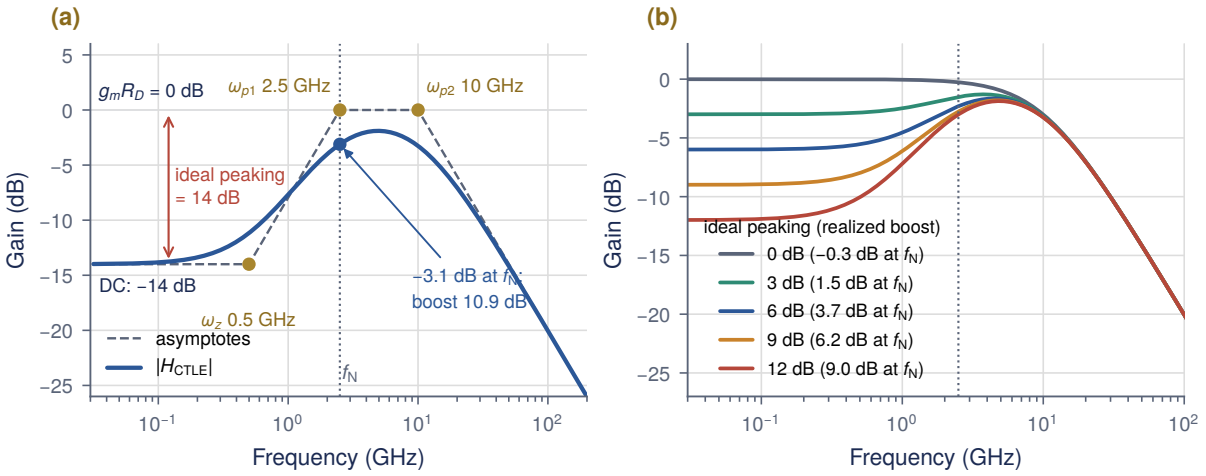
(a)
g_mR_D = 0 dB
ω_{p1} 2.5 GHz
ω_{p2} 10 GHz
ideal peaking
= 14 dB
DC: −14 dB
ω_z 0.5 GHz
−3.1 dB at f_N;
boost 10.9 dB
asymptotes
$|H_{CTLE}|$
f_N
Gain (dB)
Frequency (GHz)
(b)
ideal peaking (realized boost)
0 dB (−0.3 dB at f_N)
3 dB (1.5 dB at f_N)
6 dB (3.7 dB at f_N)
9 dB (6.2 dB at f_N)
12 dB (9.0 dB at f_N)
Gain (dB)
Frequency (GHz)