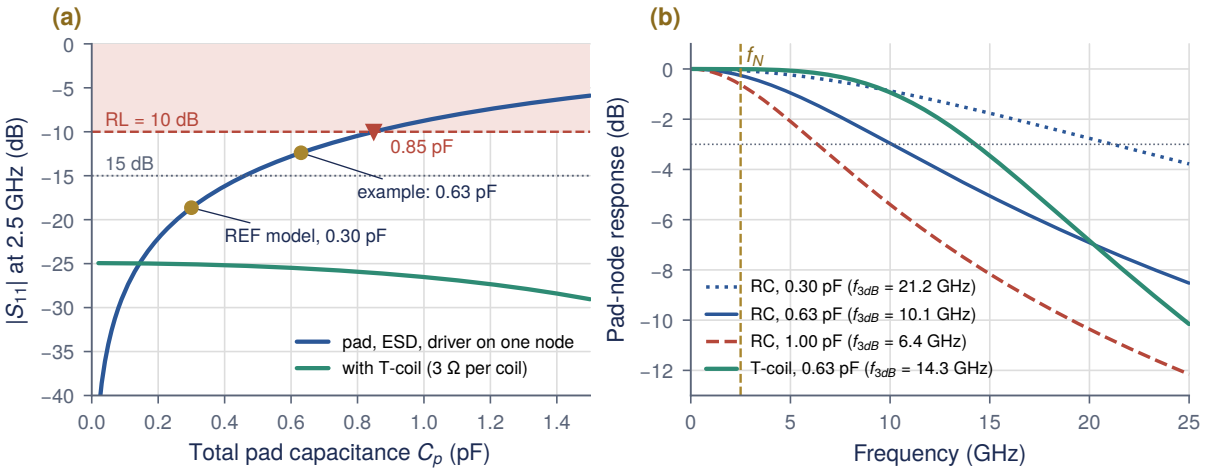
(a)
RL = 10 dB
15 dB
0.85 pF
example: 0.63 pF
REF model, 0.30 pF
pad, ESD, driver on one node
with T-coil (3 Ω per coil)
|S11| at 2.5 GHz (dB)
Total pad capacitance Cp (pF)
(b)
fN
RC, 0.30 pF (f3dB = 21.2 GHz)
RC, 0.63 pF (f3dB = 10.1 GHz)
RC, 1.00 pF (f3dB = 6.4 GHz)
T-coil, 0.63 pF (f3dB = 14.3 GHz)
Pad-node response (dB)
Frequency (GHz)