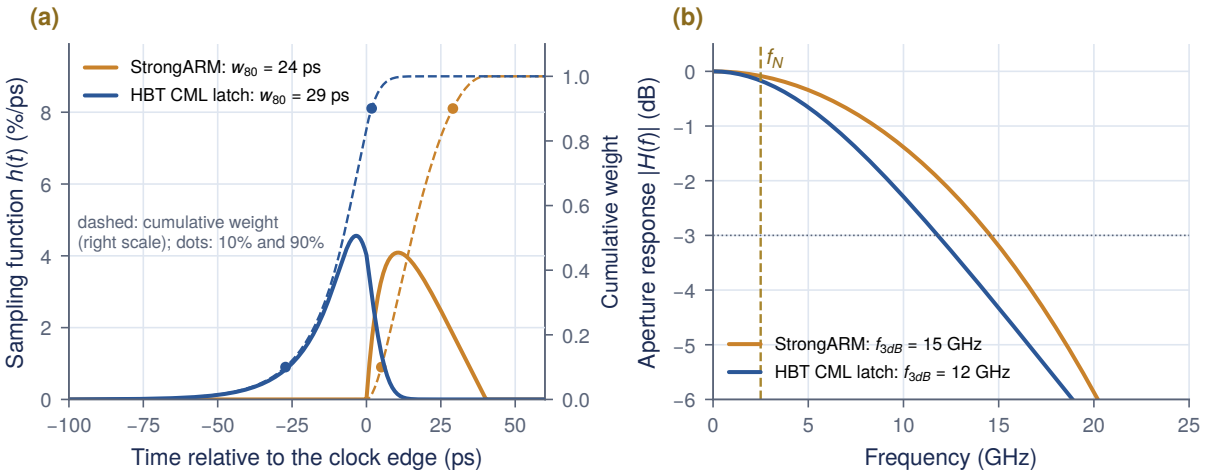
(a)
StrongARM: w_{80} = 24 ps
HBT CML latch: w_{80} = 29 ps
dashed: cumulative weight
(right scale); dots: 10% and 90%
Sampling function $h(t)$ (%/ps)
Cumulative weight
Time relative to the clock edge (ps)
(b)
f_N
Aperture response $|H(f)|$ (dB)
StrongARM: f_{3dB} = 15 GHz
HBT CML latch: f_{3dB} = 12 GHz
Frequency (GHz)