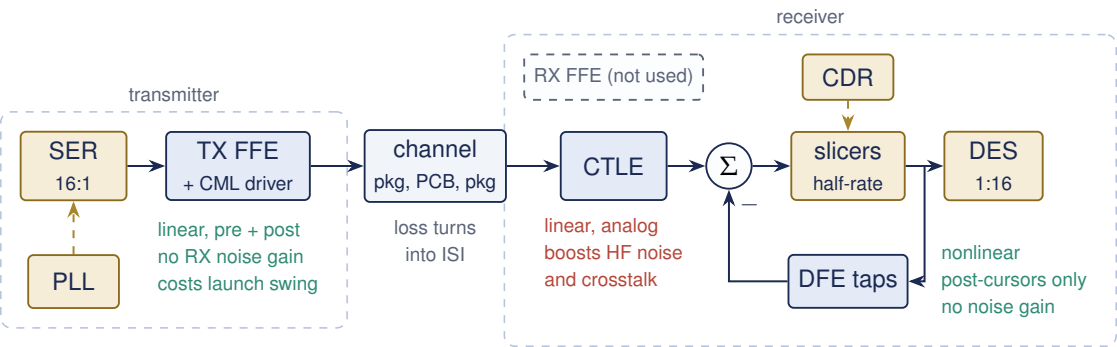
receiver
RX FFE (not used)
CDR
transmitter
SER
16:1
TX FFE
+ CML driver
channel
pkg, PCB, pkg
CTLE
Σ
slicers
half-rate
DES
1:16
PLL
linear, pre + post
no RX noise gain
costs launch swing
loss turns
into ISI
linear, analog
boosts HF noise
and crosstalk
DFE taps
nonlinear
post-cursors only
no noise gain