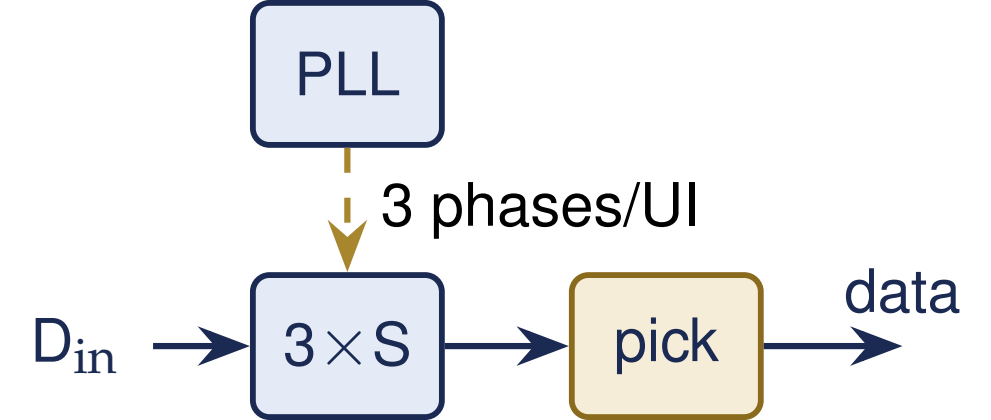
PLL
3 phases/UI
D_{in}
3×S
pick
data